
BRUMBERG


TRAXX MINI LED track spotlight, on/off switchable

Article no. 88706165

Light. For Generations.



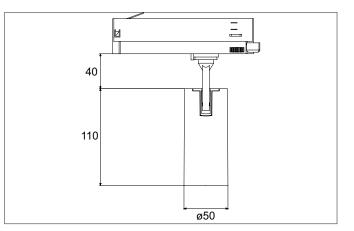

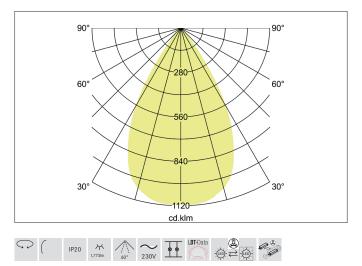

Tender

LED track spotlight, on/off switchable, Round.Luminaire diameter 50.0 mm, Weight 0.378 kg, with rotattionssymmetrical, deep, wide distributed light intensity.. Luminous flux 1.773 lm, Power 1 x 14,5 W, Light colour neutral white, Correlated color temprature (CCT) 3.500 K, Colour rendering index CRI > 90, Rated life time L80/B50 at 25 °C: 50.000 h, Housing material: Aluminium / Glass / Plastic, Colour: Silver structure, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): II, Degree of protection (DIN EN 60529): IP20. With electronic driver, on/off switchable.

Article data		
Article no.	88706165	
GTIN	4251433976141	
Series name	TRAXX MINI	
Short description	LED track spotlight, on/off switchable	
Material	Aluminium / Glass / Plastic	
Colour	Silver	
Type of surface	Structure	
Shape	Round	
Outer diameter	50 mm	
Weight	0.378 kg	
Conformance	CE, UKCA	

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 17.10.2024 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/

TRAXX MINI LED track spotlight, on/off switchable

Article no. 88706165

Light. For Generations.

BRUMBERG

Lighting technology	
Colour temperature	3.500 K
Light colour	White
Luminous flux	1,773 lm
System efficiency	122 lm/W
Colour rendering	CRI > 90
Reflector	High-gloss
Beam angle	60°
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	14.5 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Lamp	LED
Protection class	
Degree of protection	IP20
Control	on/off
Rulh change possible	The light source of this luminaire may only be replaced by the manufacturer or a service
Bulb change possible	technician commissioned by him or a similarly qualified person.
Rated life time L80/B50 at 25 °C	50.000 h

Mounting technology	
Mounting method	Surface mounting
Place of installation	Ceiling-mounted
Adjustability	Rotatable and adjustable head
Swivel angle	90°
Rotation angle	350°
Head adjustable angle	90°
Suitable for through-wiring	No

Packing data	
Gross weight	0.455 kg
Length of packaging	170 mm
Packaging width	170 mm
Packaging hight	110 mm
	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.
Disposal at end of life	By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 17.10.2024 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/