




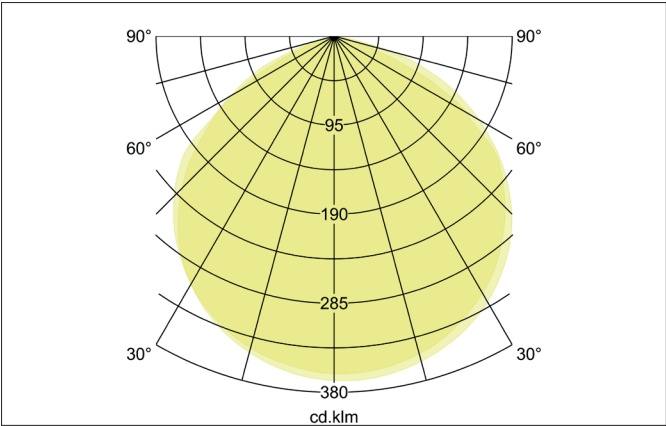

**NEO MINI LED-Fluter, IP65, schaltbar**  
Article no. 60812184

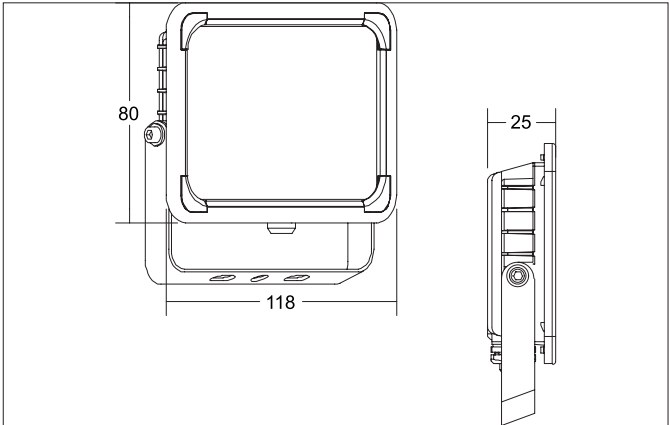

**Tender**  
LED floodlight, IP65, switchable, luminaire length 118 mm, luminaire width 80 mm, height 25 mm, weight 0.281 kg, with rotationally symmetrical narrow-wide beam light distribution. Transparent glass cover, rated luminous flux 2,400 lm, UGR < 25, rated wattage 1 x 20 W, neutral white light color, most similar color temperature (CCT) 4,000 K, general color rendering index CRI > 80, service life L80/B10 at 25 °C: 50,000 h, housing material: aluminum / glass, color: textured black, permissible ambient temperature (ta): -20 °C - +25 °C, protection class (EN 61140): I, degree of protection (DIN EN 60529): IP65, degree of impact resistance according to IEC62262: IK08. With electronic control gear, switchable.

Article data	
Article no.	60812184
GTIN	4251433971788
Series name	NEO MINI
Short description	LED-Fluter, IP65, schaltbar
Material	Aluminium / Glass
Colour	Black
Type of surface	Structure
Shape	Rectangular
Length	118 mm
Width	80 mm
Hight	25 mm
Scope of delivery	inkl. Konverter zum Anschluss an 230 V-Netzspannung und Anschlussleitung 1.000 mm
Weight	0.281 kg
Length of the connection line	1,000 mm
Conformance	CE, UKCA


**NEO MINI LED-Fluter, IP65, schaltbar**

Article no. 60812184

Lighting technology	
Colour temperature	4.000 K
Light colour	White
Light output	Direct
Luminous flux	2,400 lm
System efficiency	120 lm/W
Colour rendering	CRI > 80
Luminaire optics	Lens
Reflector	Other
Beam angle	120°
Glare evaluation	UGR < 25
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Lamp	LED
Lamp holder	Without fitting
Protection class	I
Degree of protection	IP65
Control	on/off
Length of the connection line	1,000 mm
Design of the connecting cable	3 x 1 mm <sup>2</sup> , Gummikabel
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Rated life time L80/B10 at 25 °C	50.000 h
Energy efficiency class	nicht erforderlich

Mounting technology	
Mounting method	Surface mounting
Place of installation	Wall-mounted
Impact resistance	IK08
Material cover	Glass transparent
Suitable for through-wiring	No

Packing data	
Gross weight	0.322 kg
Length of packaging	160 mm
Packaging width	120 mm
Packaging height	30 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>