
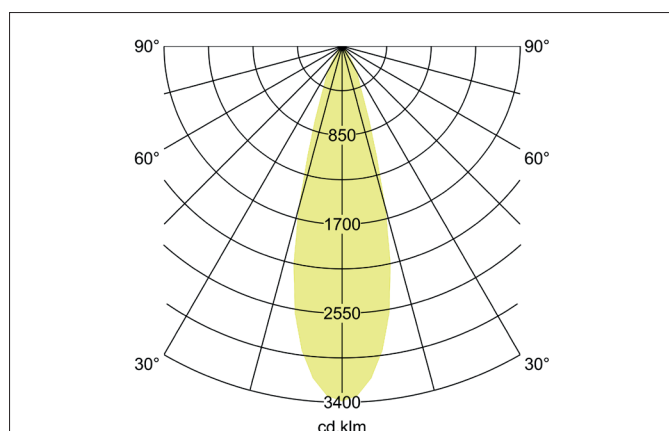
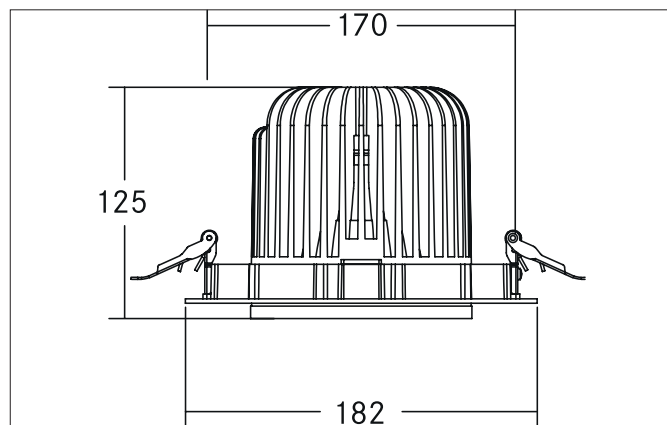


ATLAS LED recessed spotlight

Article no. 12592178


Tender

Round LED recessed spotlight, rotatable and tiltable, DALI dimmable, silver reflector, faceted, tool-free ceiling installation using installation springs. Ceiling cut-out Ø 170 mm, installation depth 125 mm, outer diameter 182 mm, weight 1.255 kg, silver reflector with rotationally symmetrical deep-wide beam light distribution. Rated luminous flux 4,075 lm, rated wattage 1 x 31.5 W, light color warm white to daylight white, most similar color temperature (CCT) 2,700 - 6,500 K, general color rendering index CRI > 90, service life L70/B10 at 25 °C: 50,000 h, housing material: aluminum / glass / plastic, color: textured white, permissible ambient temperature (ta): -20 °C - +25 °C, protection class (EN 61140): II, degree of protection (DIN EN 60529): IP20. With electronic control gear, DALI-DT8 dimmable.

Article data	
Article no.	12592178
GTIN	4251433956433
Series name	ATLAS
Short description	LED recessed spotlight
Material	Aluminium / Glass / Plastic
Colour	White
Type of surface	Structure
Shape	Round
Outer diameter	182 mm
Built-in diameter	170 mm
Installation depth	125 mm
Scope of delivery	incl. driver
Weight	1.255 kg
Conformance	CE, UKCA

ATLAS LED recessed spotlight

Article no. 12592178

Lighting technology	
Colour temperature	2.700 K - 6.500 K
Light colour	White
Color Temperature 1	6,500 K
Light output	Direct
Luminous flux	4,075 lm
Luminous flux 1	4,075 lm
System efficiency	129 lm/W
Colour rendering	CRI > 90
Reflector	High-gloss
Reflector colour	silver
Beam angle	30°
Light sharing	Symmetric
Adjustable color temperature	Infinite control

Operating technology of the luminaire	
System output	31.5 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Lamp	LED
Protection class	II
Degree of protection	IP20
Control	DALI-DT8
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Energy efficiency class	nicht erforderlich
max. no. lights on B10 A	18
max. no. lights on B16 A	28

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Rotable and pivoted
Swivel angle	30°
Rotation angle	355°
Further references	No cover with thermal insulation material

Packing data	
Gross weight	1.415 kg
Length of packaging	195 mm
Packaging width	195 mm
Packaging height	220 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>