
Article no. 12321254

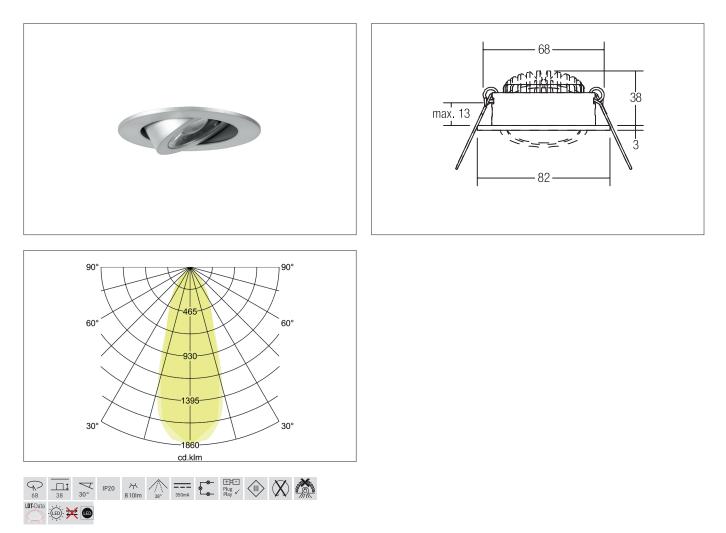

#### Tender

Round LED recessed spotlight, with lens optics, tool-free ceiling installation using installation springs. Ceiling cut-out Ø 68 mm, installation depth 38 mm, outer diameter 82 mm, weight 0.119 kg, silver reflector with rotationally symmetrical deep-wide beam light distribution. Transparent plastic cover, rated luminous flux 810 lm, rated wattage 1 x 6 W, neutral white light color, most similar color temperature (CCT) 4,000 K, general color rendering index CRI > 80, housing material: aluminum / plastic, color: aluminum, permissible ambient temperature (ta): -20 °C - +25 °C, protection class (EN 61140): III, degree of protection (DIN EN 60529): IP20. For connection to an external control gear, which is not included with the luminaire. Dimmable depending on the control gear.

#### **Product Benefits**

- LED-Einbaustrahler in runder Bauform aus massivem Aluminium.
- Deckenausschnitt 68 mm, Außendurchmesser 82 mm,
- Einbautiefe 38 mm, IP20.
- Schwenkbereich 30°.
- Ohne sichtbaren Sprengring.
- Klassische, formal zurückgenommene Formgebung.
- Bei Verwendung eines geeigneten Konverters dimmbar.
- In gleicher Optik auch als schaltbares und dimmbares Set (Phasenabschnitt) lieferbar.

Article no. 12321254

Article data	
Article no.	12321254
GTIN	4251433921639
Series name	DISC
Short description	LED-Einbaustrahler, mit Linsenoptik
Material	Aluminium / Plastic
Colour	Alu
Type of surface	Matt
Shape	Round
Outer diameter	82 mm
Built-in diameter	68 mm
Installation depth	38 mm
Hight	3 mm
Weight	0.119 kg
Conformance	CE, UKCA

Lighting technology	
Colour temperature	4.000 K
Light colour	White
Light output	Direct
Luminous flux	810 lm
System efficiency	135 lm/W
Colour rendering	CRI > 80
Reflector	Faceted
Reflector colour	silver
Beam angle	38°
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	6 W
Voltage type	DC
Current	350 mA
Lamp	LED
Lamp holder	Plug&Play
Protection class	
Degree of protection	IP20
Dimmable	Depending on type of control gear
Control	Depending on driver
Bulb change possible	Yes
Energy efficiency class	nicht erforderlich

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Pivoted
Swivel angle	30°
Max. ceiling thickness	13 mm
Further references	No cover with thermal insulation material
Material cover	Plastic, transparent
Circlip	Without circlip
Suitable for through-wiring	Yes, with optional accessories

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 07.05.2025 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/

Packing data	
Gross weight	0.135 kg
Length of packaging	85 mm
Packaging width	43 mm
Packaging hight	85 mm
	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.
Disposal at end of life	By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.

equired accessories rticle no.: 17662000 ED converter 350 mA, on/off switchable ower: 1 - 7,2 W, Plug&Play
ED converter 350 mA, on/off switchable
ower: 1 - 7.2 W. Plug&Play
imensions: 68 mm x 35 mm x 21 mm
tps://www.brumberg.com/fileadmin/products/Datenblatt_17662000_2021_DE.pdf
rticle no.: 17662020
ED converter 350 mA, on/off switchable
ower: 1 - 7,2 W, Plug&Play + Anschlussbox
imensions: 68 mm x 35 mm x 21 mm
tps://www.brumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf
rticle no.: 17663000
ED converter 350 mA, trailing-edge phase dimmable
ower: 2,8 - 7 W, Plug&Play
imensions: 110 mm x 50 mm x 19 mm
tps://www.brumberg.com/fileadmin/products/Datenblatt_17663000_2021_DE.pdf
rticle no.: 17663020
ED converter 350 mA, trailing-edge phase dimmable
ower: 2,8 - 7 W, Plug&Play + Anschlussbox
imensions: 110 mm x 50 mm x 19 mm
tps://www.brumberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf
rticle no.: 17613000
ED converter 350 mA, on/off switchable
ower: 1 - 15 W, Plug&Play
imensions: 115 mm x 34 mm x 19 mm
tps://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf
rticle no.: 17613020
ED converter 350 mA, on/off switchable
ower: 1 - 15 W, Plug&Play + Anschlussbox
imensions: 115 mm x 34 mm x 19 mm
tps://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf
rticle no.: 17621000
ED converter 350 mA, on/off switchable
ower: 1 - 21 W, Plug&Play
imensions: 128 mm x 50 mm x 13 mm
ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf
rticle no.: 17621020
ED converter 350 mA, on/off switchable
bwer: 1 - 21 W, Plug&Play + Anschlussbox
imensions: 128 mm x 50 mm x 13 mm
ttps://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf
rticle no.: 17652000
ED-round converter 350 mA, trailing-edge phase dimmer
ower: 4,9 - 7 W, Plug&Play imensions: 51 mm x 24 mm
ttps://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf
rticle no.: 17652020
ED-round converter 350 mA, trailing-edge phase dimmer
ower: 4,9 - 7 W, Plug&Play + Anschlussbox
imensions: 51 mm x 24 mm
ttps://www.brumberg.com/fileadmin/products/Datenblatt_17652020_2021_DE.pdf

Required accessories   Article no.: 17640000   LED converter 350 mA, trailing-edge phase dimmable   Power: 4,2 - 10 W, Plug&Play   Dimensions: 102 mm x 38 mm x 21 mm   https://www.brumberg.com/fileadmin/products/Datenblatt_17640000_2021_DE.pdf
LED converter 350 mA, trailing-edge phase dimmable Power: 4,2 - 10 W, Plug&Play Dimensions: 102 mm x 38 mm x 21 mm
Power: 4,2 - 10 W, Plug&Play Dimensions: 102 mm x 38 mm x 21 mm
Dimensions: 102 mm x 38 mm x 21 mm
Intips.//www.brumberg.com/meaumin/products/Datenbiatt 17040000 2021 DE.bui
Article no.: 17640020
LED converter 350 mA, trailing-edge phase dimmable
Power: 4,2 - 10 W, Plug&Play + Anschlussbox
Dimensions: 102 mm x 38 mm x 21 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17640020_2021_DE.pdf
Article no.: 17648000
LED converter 350 mA, trailing-edge phase dimmable
Power: 0,7 - 17 W, Plug&Play
Dimensions: 166 mm x 46 mm x 34 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17648000_2021_DE.pdf
Article no.: 17648020
LED converter 350 mA, trailing-edge phase dimmable
Power: 0,7 - 17 W, Plug&Play + Anschlussbox
Dimensions: 166 mm x 46 mm x 34 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17648020_2021_DE.pdf
Article no.: 17657000
LED converter 350 mA, 1-10 V dimmable (analog)
Power: 5,2 - 18 W, Plug&Play
Dimensions: 110 mm x 52 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17657000_2021_DE.pdf
Article no.: 17682000
LED converter 350 mA, DALI dimmable (digital)
Power: 1,8 - 18,5 W, Plug&Play
Dimensions: 146.5 mm x 43.5 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17682000_2021_DE.pdf
Article no.: 17682020
LED converter 350 mA, DALI dimmable (digital)
Power: 1,8 - 18,5 W, Plug&Play + Anschlussbox
Dimensions: 146.5 mm x 43.5 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17682020_2021_DE.pdf
Article no.: 17683000
LED converter 350 mA, DALI dimmable (digital)
Power: 3.5 - 17 W. Plug&Play
Dimensions: 110.5 mm x 52 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt 17683000 2021 DE.pdf
Article no.: 17683020
LED converter 350 mA, DALI dimmable (digital)
Power: 3,5 - 17 W, Plug&Play + Anschlussbox
Dimensions: 110.5 mm x 52 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17683020_2021_DE.pdf
Article no.: 17684000
LED converter 350 mA, DALI dimmable (digital)
Power: 2,8 - 7 W, Plug&Play Dimensions: 130 mm x 42 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17684000_2021_DE.pdf

Article no. 12321254

Required accessories
Article no.: 17684020
LED converter 350 mA, DALI dimmable (digital)
Power: 2,8 - 7 W, Plug&Play + Anschlussbox
Dimensions: 130 mm x 42 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17684020_2021_DE.pdf
Article no.: 17658000
LED round converter 350 mA, DALI dimmable (digital)
Power: 2,1 - 9 W, Plug&Play
Dimensions: 56 mm x 25 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17658000_2021_DE.pdf
Article no.: 17658020
LED round converter 350 mA, DALI dimmable (digital)
Power: 2,1 - 9 W, Plug&Play + Anschlussbox
Dimensions: 56 mm x 25 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17658020_2021_DE.pdf
Article no.: 17671000
LED converter 350mA, ZigBee dimmable
Power: 3,5 - 18,5 W, Plug&Play
Dimensions: 146.5 mm x 44 mm x 30 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17671000_2021_DE.pdf
Article no.: 17671020
LED converter 350mA, ZigBee dimmable
Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox
Dimensions: 146.5 mm x 44 mm x 30 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf
Article no.: 17672000
LED converter 350mA, Casambi dimmable
Power: 3,5 - 18,5 W, Plug&Play
Dimensions: 146.5 mm x 44 mm x 30 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf
Article no.: 17672020
LED converter 350mA, Casambi dimmable
Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox
Dimensions: 146.5 mm x 44 mm x 30 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17672020_2021_DE.pdf

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 07.05.2025 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/

Optional accessories
Article no.: 81201250
Reducing ring D 110 mm, for luminaire cut-out size 68 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_81201250_2021_DE.pdf
Article no.: 81202250
Reducing ring D 130 mm, for luminaire cut-out size 68 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_81202250_2021_DE.pdf
Article no.: 81203250
Reducing ring D 145 mm, for luminaire cut-out size 68 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_81203250_2021_DE.pdf
Article no.: 3835
Plug & Play extension lead 350 mA
Dimensions: 500 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_00003835_2021_DE.pdf
Article no.: 3836
Plug & Play extension lead 350 mA
Dimensions: 1,000 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_00003836_2021_DE.pdf
Article no.: 3837
Plug & Play extension lead 350 mA
Dimensions: 2,000 mm https://www.brumberg.com/fileadmin/products/Datenblatt_00003837_2021_DE.pdf
https://www.brumberg.com/meadmin/products/batenbiatt_0000363/_2021_be.pdi