
# **BRUMBERG**


### TRAXX MAXI LED track spotlight, on/off switchable

Article no. 88722183

Light. For Generations.



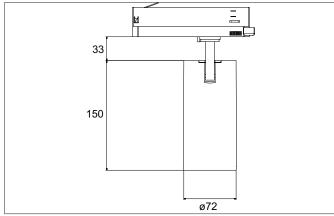

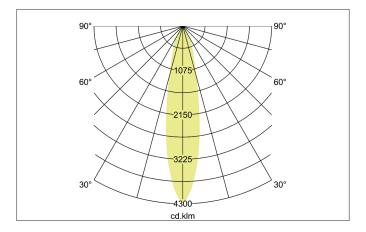



#### Tende

LED track spotlight, on/off switchable, Round.Luminaire diameter 70.0 mm, Weight 0.666 kg, with rotattionssymmetrical, deep, wide distributed light intensity.Luminous flux 2.927 lm, Power 1 x 24 W, Light colour warm white, Correlated color temprature (CCT) 3.000 K, Colour rendering index CRI > 90, Rated life time L80/B50 at 25 °C: 50.000 h, Housing material: Aluminium / Glass / Plastic, Colour: Black structure, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): II, Degree of protection (DIN EN 60529): IP20, .With electronic driver, on/off switchable.

| Article data      |  |  |
|-------------------|--|--|
| Article no.       | 88722183                               |  |
| GTIN              | 4251433978107                          |  |
| Series name       | TRAXX MAXI                             |  |
| Short description | LED track spotlight, on/off switchable |  |
| Material          | Aluminium / Glass / Plastic            |  |
| Colour            | Black                                  |  |
| Type of surface   | Structure                              |  |
| Shape             | Round                                  |  |
| Outer diameter    | 70 mm                                  |  |
| Weight            | 0.666 kg                               |  |

# **BRUMBERG**

## TRAXX MAXI LED track spotlight, on/off switchable

Article no. 88722183

Light. For Generations.

| Lighting technology          |            |
|------------------------------|------------|
| Colour temperature           | 3.000 K    |
| Light colour                 | White      |
| Luminous flux                | 2,927 lm   |
| System efficiency            | 122 lm/W   |
| Colour rendering             | CRI > 90   |
| Reflector                    | High-gloss |
| Beam angle                   | 20°        |
| Light sharing                | Symmetric  |
| Adjustable color temperature | No         |

| Operating technology of the luminaire |  |
|---------------------------------------|--|
| System output                         | 24 W   |
| Voltage type                          | AC   |
| AC nominal voltage max                | 230 V  |
| Frequenz max.                         | 50 Hz  |
| Lamp                                  | LED  |
| Protection class                      | II   |
| Degree of protection                  | IP20   |
| Control                               | on/off   |
| Bulb change possible                  | The light source of this luminaire may only be replaced by the manufacturer or a service |
| Duin change possible                  | technician commissioned by him or a similarly qualified person.                          |
| Rated life time L80/B50 at 25 °C      | 50.000 h   |

| Mounting technology         |                               |
|-----------------------------|-------------------------------|
| Mounting method             | Surface mounting              |
| Place of installation       | Ceiling-mounted               |
| Adjustability               | Rotatable and adjustable head |
| Swivel angle                | 90°                           |
| Rotation angle              | 350°                          |
| Head adjustable angle       | 90°                           |
| Suitable for through-wiring | No                            |

| Packing data            |   |
|-------------------------|---|
| Gross weight            | 0.796 kg  |
| Length of packaging     | 290 mm  |
| Packaging width         | 115 mm  |
| Packaging hight         | 165 mm  |
| Disposal at end of life | This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.  By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment. |