

Article no. 13127173



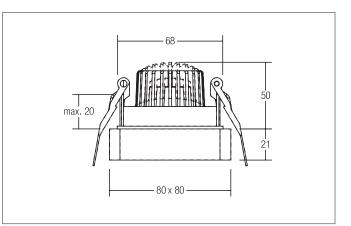



#### 

#### Tender

Square LED recessed spotlight, tool-free ceiling installation using installation springs. Ceiling cut-out Ø 68 mm, installation depth 50 mm, length 80 mm, width 80 mm, weight 0.268 kg, silver reflector with rotationally symmetrical deep-wide beam light distribution. Transparent glass cover, rated luminous flux 730 lm, rated wattage 1 x 6 W, warm white light color, most similar color temperature (CCT) 3,000 K, general color rendering index CRI > 80, housing material: aluminum / glass, color: textured white, permissible ambient temperature (ta): -20 °C - +25 °C, protection class (EN 61140): III, degree of protection (DIN EN 60529): IP20. For connection to an external control gear, which is not included with the luminaire. Dimmable depending on the control gear.

#### **Product Benefits**

- Einbaustrahler in quadratischer Bauform aus massivem Aluminium.
- Deckenausschnitt 68 mm, Länge 80 mm, Breite 80 mm, Einbautiefe 50 mm, Höhe 21 mm, Lichtstrom 680 lm, IP20.
- Schwenkbereich 25°.
- Bei Verwendung eines geeigneten Konverters dimmbar.
- In gleicher Oberflächenstruktur und in gleicher Farbe auch in Ausführung rund verfügbar.



Article no. 13127173

Article data	
Article no.	13127173
GTIN	4251433906421
Series name	QUBIC
Short description	LED-Einbaustrahler
Material	Aluminium / Glass
Colour	White
Type of surface	Structure
Shape	Square
Length	80 mm
Width	80 mm
Built-in diameter	68 mm
Installation depth	50 mm
Hight	21 mm
Weight	0.268 kg
Conformance	CE, UKCA

Lighting technology	
Colour temperature	3.000 K
Light colour	White
Light output	Direct
Luminous flux	730 lm
System efficiency	122 lm/W
Colour rendering	CRI > 80
Reflector	Faceted
Reflector colour	silver
Beam angle	38°
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
Voltage type	DC
Current	350 mA
Lamp	LED
Lamp holder	Plug&Play
Protection class	
Degree of protection	IP20
Dimmable	Depending on type of control gear
Control	Depending on driver
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service
	technician commissioned by him or a similarly qualified person.
Energy efficiency class	nicht erforderlich

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Pivoted
Swivel angle	25°
Max. ceiling thickness	20 mm
Further references	No cover with thermal insulation material
Material cover	Glass transparent
Circlip	Without circlip
Suitable for through-wiring	Yes, with optional accessories

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 05.05.2025 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/

Article no. 13127173

Packing data	
Gross weight	0.356 kg
Length of packaging	140 mm
Packaging width	110 mm
Packaging hight	120 mm
	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.
Disposal at end of life	By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 05.05.2025 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/

Article no. 13127173

Required accessories
Article no.: 17662000
LED converter 350 mA, on/off switchable
Power: 1 - 7,2 W, Plug&Play Dimensions: 68 mm x 35 mm x 21 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17662000_2021_DE.pdf
Article no.: 17662020
LED converter 350 mA, on/off switchable
Power: 1 - 7,2 W, Plug&Play + Anschlussbox
Dimensions: 68 mm x 35 mm x 21 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf
Article no.: 17663000
LED converter 350 mA, trailing-edge phase dimmable
Power: 2,8 - 7 W, Plug&Play
Dimensions: 110 mm x 50 mm x 19 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17663000_2021_DE.pdf
Article no.: 17663020
LED converter 350 mA, trailing-edge phase dimmable
Power: 2,8 - 7 W, Plug&Play + Anschlussbox
Dimensions: 110 mm x 50 mm x 19 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf
Article no.: 17613000
LED converter 350 mA, on/off switchable
Power: 1 - 15 W, Plug&Play
Dimensions: 115 mm x 34 mm x 19 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf
Article no.: 17613020
LED converter 350 mA, on/off switchable
Power: 1 - 15 W, Plug&Play + Anschlussbox Dimensions: 115 mm x 34 mm x 19 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf
Article no.: 17621000
LED converter 350 mA, on/off switchable
Power: 1 - 21 W, Plug&Play
Dimensions: 128 mm x 50 mm x 13 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf
Article no.: 17621020
LED converter 350 mA, on/off switchable
Power: 1 - 21 W, Plug&Play + Anschlussbox
Dimensions: 128 mm x 50 mm x 13 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf
Article no.: 17652000
LED-round converter 350 mA, trailing-edge phase dimmer
Power: 4,9 - 7 W, Plug&Play
Dimensions: 51 mm x 24 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf
Article no.: 17652020
LED-round converter 350 mA, trailing-edge phase dimmer
Power: 4,9 - 7 W, Plug&Play + Anschlussbox
Dimensions: 51 mm x 24 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17652020_2021_DE.pdf
https://www.semberg.com/medanin/producto/batchblatt_//002020_2021_bc.par

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 05.05.2025 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/

Article no. 13127173

Required accessories
Article no.: 17640000
LED converter 350 mA, trailing-edge phase dimmable
Power: 4,2 - 10 W, Plug&Play
Dimensions: 102 mm x 38 mm x 21 mm
https://www.brumberg.com/fileadmin/products/Datenblatt 17640000 2021 DE.pdf
Article no.: 17640020
LED converter 350 mA, trailing-edge phase dimmable
Power: 4,2 - 10 W, Plug&Play + Anschlussbox Dimensions: 102 mm x 38 mm x 21 mm
https://www.brumberg.com/fileadmin/products/Datenblatt 17640020 2021 DE.pdf
Article no.: 17648000
LED converter 350 mA, trailing-edge phase dimmable
Power: 0,7 - 17 W, Plug&Play
Dimensions: 166 mm x 46 mm x 34 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17648000_2021_DE.pdf
Article no.: 17648020
LED converter 350 mA, trailing-edge phase dimmable
Power: 0,7 - 17 W, Plug&Play + Anschlussbox
Dimensions: 166 mm x 46 mm x 34 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17648020_2021_DE.pdf
Article no.: 17657000
LED converter 350 mA, 1-10 V dimmable (analog)
Power: 5,2 - 18 W, Plug&Play
Dimensions: 110 mm x 52 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17657000_2021_DE.pdf
Article no.: 17682000
LED converter 350 mA, DALI dimmable (digital)
Power: 1,8 - 18,5 W, Plug&Play
Dimensions: 146.5 mm x 43.5 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17682000_2021_DE.pdf
Article no.: 17682020
LED converter 350 mA, DALI dimmable (digital)
Power: 1,8 - 18,5 W, Plug&Play + Anschlussbox
Dimensions: 146.5 mm x 43.5 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17682020_2021_DE.pdf
Article no.: 17683000
LED converter 350 mA, DALI dimmable (digital)
Power: 3,5 - 17 W, Plug&Play
Dimensions: 110.5 mm x 52 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17683000_2021_DE.pdf
Article no.: 17683020
LED converter 350 mA, DALI dimmable (digital)
Power: 3,5 - 17 W, Plug&Play + Anschlussbox
Dimensions: 110.5 mm x 52 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17683020_2021_DE.pdf
Article no.: 17684000
LED converter 350 mA, DALI dimmable (digital)
Power: 2,8 - 7 W, Plug&Play
Dimensions: 130 mm x 42 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17684000_2021_DE.pdf

Article no. 13127173

Required accessories
Article no.: 17684020
LED converter 350 mA, DALI dimmable (digital)
Power: 2,8 - 7 W, Plug&Play + Anschlussbox
Dimensions: 130 mm x 42 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17684020_2021_DE.pdf
Article no.: 17658000
LED round converter 350 mA, DALI dimmable (digital)
Power: 2,1 - 9 W, Plug&Play
Dimensions: 56 mm x 25 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17658000_2021_DE.pdf
Article no.: 17658020
LED round converter 350 mA, DALI dimmable (digital)
Power: 2,1 - 9 W, Plug&Play + Anschlussbox
Dimensions: 56 mm x 25 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17658020_2021_DE.pdf
Article no.: 17671000
LED converter 350mA, ZigBee dimmable
Power: 3,5 - 18,5 W, Plug&Play
Dimensions: 146.5 mm x 44 mm x 30 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17671000_2021_DE.pdf
Article no.: 17671020
LED converter 350mA, ZigBee dimmable
Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox
Dimensions: 146.5 mm x 44 mm x 30 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf
Article no.: 17672000
LED converter 350mA, Casambi dimmable
Power: 3,5 - 18,5 W, Plug&Play
Dimensions: 146.5 mm x 44 mm x 30 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf
Article no.: 17672020
LED converter 350mA, Casambi dimmable
Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox
Dimensions: 146.5 mm x 44 mm x 30 mm
https://www.brumberg.com/fileadmin/products/Datenblatt 17672020 2021 DE.pdf
Optional accessories
Article no.: 3835 Plug & Play extension lead 350 mA
riug & riay extension lead 550 mA
Dimensions: 500 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_00003835_2021_DE.pdf
Article no.: 3836
Plug & Play extension lead 350 mA
Dimensione: 1 000 mm
Dimensions: 1,000 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_00003836_2021_DE.pdf
Article no.: 3837
Plug & Play extension lead 350 mA

Dimensions: 2,000 mm

https://www.brumberg.com/fileadmin/products/Datenblatt\_00003837\_2021\_DE.pdf