




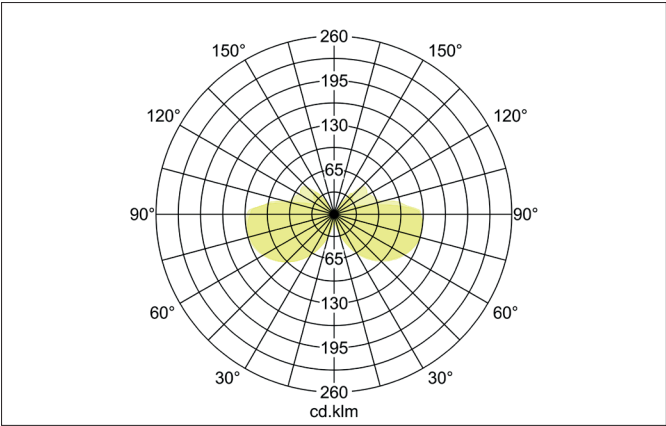

STICK Bollard light, IP65, height 400 mm
Article no. 60019183

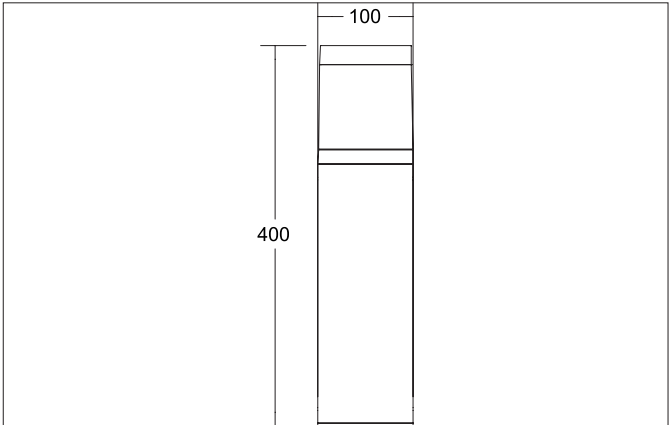

Tender
Round LED bollard luminaire, IP65, height 400 mm, switchable, , height 400 mm Weight 1.15 kg, with rotationally symmetrical deep-wide beam light distribution. PC (polycarbonate) opal cover, rated luminous flux 530 lm, rated wattage 1 x 8 W, light color neutral white to warm white, most similar color temperature (CCT) 4,000 - 3,000 K, general color rendering index CRI > 80, housing material: aluminum / plastic, color: black structure, permissible ambient temperature (ta): -20 °C - +25 °C, protection class (EN 61140): I, degree of protection (DIN EN 60529): IP65, degree of impact resistance according to IEC62262: IK08. With electronic control gear, switchable.

Article data	
Article no.	60019183
GTIN	4251433971887
Series name	STICK
Short description	Bollard light, IP65, height 400 mm
Material	Aluminium / Plastic
Colour	black structure
Type of surface	Structure
Shape	Round
Hight	400 mm
Scope of delivery	inkl. Konverter zum Anschluss an 230 V-Netzspannung
Weight	1.15 kg
Conformance	CE, UKCA


STICK Bollard light, IP65, height 400 mm

Article no. 60019183

Lighting technology	
Colour temperature	3.000 K / 4.000 K
Light colour	white
Color Temperature 1	3,000 K
Color Temperature 2	4,000 K
Light output	Direct
Luminous flux	530 lm
Luminous flux 1	530 lm
Luminous flux 2	610 lm
System efficiency	66 lm/W
Colour rendering	CRI > 80
Reflector	Other
Beam angle	120°
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Lamp	LED
Lamp holder	Without fitting
Protection class	I
Degree of protection	IP65
Control	on/off
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Energy efficiency class	nicht erforderlich

Mounting technology	
Mounting method	Surface mounting
Place of installation	Floor-mounted
Adjustability	Not adjustable
Impact resistance	IK08
Material cover	Polycarbonat opal
Suitable for through-wiring	No

Packing data	
Gross weight	1.5 kg
Length of packaging	540 mm
Packaging width	165 mm
Packaging height	145 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.