
COLIAS LED wall surface mounted luminaire, IP54

Article no. 65151103



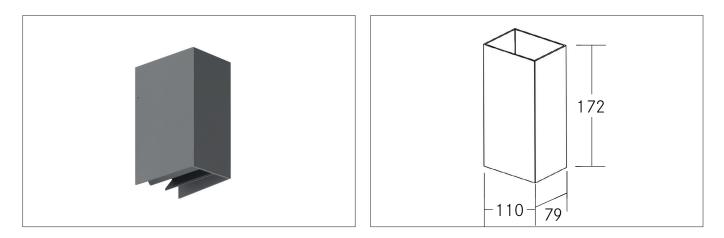

Tender

LED wall surface mounted luminaire, IP54, Rectangular.Luminaire length 110.0 mm, Luminaire width 79.0 mm, Hight 172.0 mm Weight 0.948 kg,. Luminous flux 415 lm, Power 2 x 3 W, Light colour warm white to warm white, Correlated color temprature (CCT) 2.950 - 3.050 K, Colour rendering index CRI > 80, Housing material: Aluminium / Glass, Colour: Graphite structure, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP54. With electronic driver, on/off switchable.

| Article data | | |
|-------------------|---|--|
| Article no. | 65151103 | |
| GTIN | 4251433982678 | |
| Series name | COLIAS | |
| Short description | LED wall surface mounted luminaire, IP54 | |
| Material | Aluminium / Glass | |
| Colour | Graphite | |
| Type of surface | Structure | |
| Shape | Rectangular | |
| Length | 110 mm | |
| Width | 79 mm | |
| Hight | 172 mm | |
| Scope of delivery | incl. converter for connection to 230 V mains voltage, switchable | |
| Weight | 0.948 kg | |
| Conformance | CE, UKCA | |

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 21.03.2025 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/



COLIAS LED wall surface mounted luminaire, IP54

Article no. 65151103

| Lighting technology | |
|---------------------------------------|-----------------|
| Colour temperature | 3.000 K |
| Light colour | White |
| Light output | Direct/Indirect |
| Luminous flux | 415 lm |
| System efficiency | 69 lm/W |
| McAdam-Step | McAdam-Step 3 |
| Colour rendering | CRI > 80 |
| Beam angle | 85° |
| Adjustable color temperature | No |
| | |
| Operating technology of the luminaire | |

| Operating technology of the luminaire | |
|---------------------------------------|--|
| System output | 6 W |
| Voltage type | AC |
| AC nominal voltage max | 230 V |
| Frequency max | 50 Hz |
| Frequency min | 50 Hz |
| Lamp | LED |
| Lamp holder | Without fitting |
| Protection class | |
| Degree of protection | IP54 |
| Control | on/off |
| Bulb change possible | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |

| Mounting technology | |
|-----------------------|------------------|
| Mounting method | Surface mounting |
| Place of installation | Wall-mounted |
| Adjustability | Not adjustable |
| Further references | Outdoor |

| Packing data | |
|-------------------------|--|
| Gross weight | 1.061 kg |
| Length of packaging | 200 mm |
| Packaging width | 150 mm |
| Packaging hight | 150 mm |
| | This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. |
| Disposal at end of life | By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment. |

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 21.03.2025 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/