
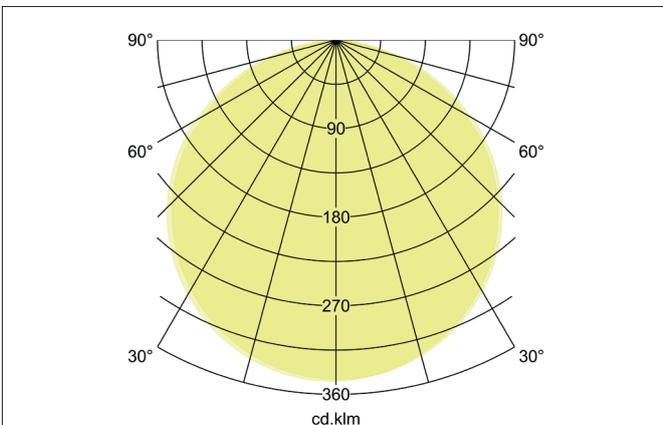


HYBRIDE LED recessed downlight, V4A, IP67
 Article no. 12673223

Light.
 For Generations.

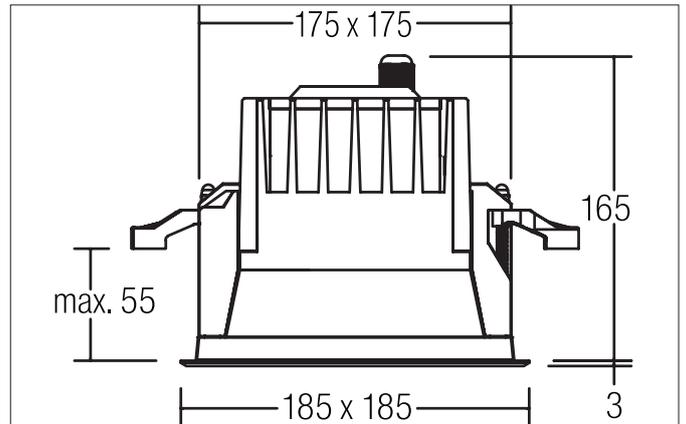

Tender
 LED recessed downlight, V4A, IP67, Square. Ceiling cut-out L x W 175 x 175 mm, Installation depth 165 mm, Length 185 mm, Width 185 mm, Weight 3,226 kg, with rotationssymmetrical, deep, wide distributed light intensity. optimal light distribution due to a glass structured cover. Luminous flux 710 lm, Power 1 x 10 W Light colour warm white, Correlated color temperature (CCT) 3.000 K, Colour rendering index CRI > 80, Housing material: Stainless steel / Aluminium / Glass, Colour: Stainless steel, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP67, shock resistance according to IEC62262: IK09 . With electronic driver, on/off switchable.

Article data	
Article no.	12673223
GTIN	4251433915287
Series name	HYBRIDE
Short description	LED recessed downlight, V4A, IP67
Material	Stainless steel / Aluminium / Glass
Colour	Stainless steel
Type of surface	Matt
Shape	Square
Built-in width	175 mm
Built-in length	175 mm
Installation depth	165 mm
Length	185 mm
Width	185 mm
Scope of delivery	Incl. converter for connection to the 230-V mains voltage, on/off switchable and 5,000 mm connecting cable
Weight	3.226 kg

HYBRIDE LED recessed downlight, V4A, IP67
Article no. 12673223

Light.
For Generations.

Lighting technology	
Colour temperature	3000 K
Light colour	White
Light output	Direct
Luminous flux	710 lm
Colour rendering	CRI > 80
Reflector	Without
Beam angle	115°
Light sharing	Symmetric

Operating technology of the luminaire	
System output	10 W
Voltage type	AC
AC nominal voltage max	230 V
Frequenz max.	50 Hz
Lamp	LED
Protection class	I
Degree of protection	IP67
Control	on/off
Bulb change possible	Yes

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Max. ceiling thickness	50 mm
Impact resistance	IK09
Further references	V4A
Material cover	Glass structured

Packing data	
Gross weight	3.533 kg
Length of packaging	210 mm
Packaging width	210 mm
Packaging height	205 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>