


**MANIOLA MAXI LED surface mounted luminaire, IP46**  
Article no. 58278003

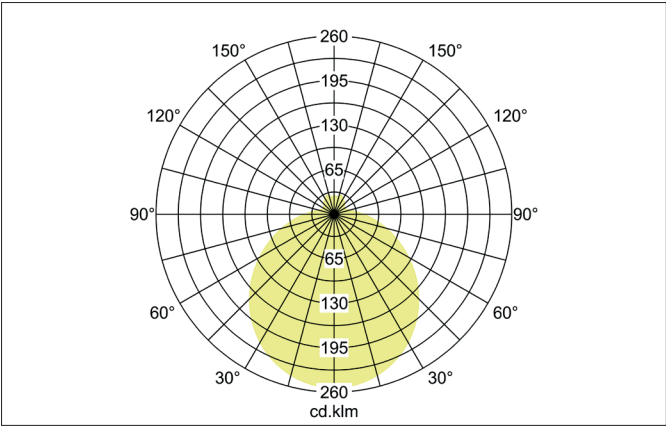

**Tender**  
LED surface mounted luminaire, IP46, Round.Luminaire diameter 450.0 mm, Hight 130.0 mm Weight 3.77 kg, with rotattionssymmetrical, deep, wide distributed light intensity. Cover glass opal. Luminous flux 2.660 lm, Power 1 x 29 W, Light colour warm white, Correlated color temprature (CCT) 3.000 K, Colour rendering index CRI > 80, Housing material: Steel, Colour: Opal, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP43. For connection to an external driver, which is not included in the scope of delivery of the luminaire. on/off switchable.

| Article data      |                                     |
|-------------------|-------------------------------------|
| Article no.       | 58278003                            |
| GTIN              | 4251433921264                       |
| Series name       | MANIOLA MAXI                        |
| Short description | LED surface mounted luminaire, IP46 |
| Material          | Steel                               |
| Colour            | Opal                                |
| Type of surface   | Matt                                |
| Shape             | Round                               |
| Outer diameter    | 450 mm                              |
| Hight             | 130 mm                              |
| Weight            | 3.770 kg                            |
| Conformance       | CE, UKCA                            |

**MANIOLA MAXI LED surface mounted luminaire, IP46**

Article no. 58278003

| Lighting technology          |           |
|------------------------------|-----------|
| Colour temperature           | 3.000 K   |
| Light colour                 | White     |
| Luminous flux                | 2,660 lm  |
| System efficiency            | 92 lm/W   |
| Colour rendering             | CRI > 80  |
| Reflector                    | Without   |
| Light sharing                | Symmetric |
| Adjustable color temperature | No        |

| Operating technology of the luminaire |                 |
|---------------------------------------|-----------------|
| System output                         | 29 W            |
| Voltage type                          | AC              |
| AC nominal voltage max                | 230 V           |
| Frequency max                         | 50 Hz           |
| Lamp                                  | LED             |
| Lamp holder                           | Without fitting |
| Protection class                      | I               |
| Degree of protection                  | IP43            |
| Dimmable                              | No              |
| Control                               | on/off          |
| Bulb change possible                  | Yes             |

| Mounting technology   |                       |
|-----------------------|-----------------------|
| Mounting method       | Surface mounting      |
| Place of installation | Ceiling-/Wall-mounted |
| Adjustability         | Not adjustable        |
| Material cover        | Glass opal            |

| Packing data            |  |
|-------------------------|--|
| Gross weight            | 4.81 kg  |
| Length of packaging     | 470 mm   |
| Packaging width         | 470 mm   |
| Packaging height        | 470 mm   |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |