
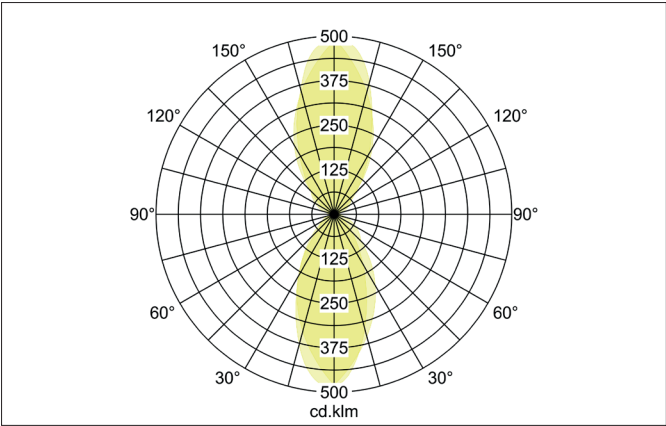


YLIP LED wall surface mounted luminaire, IP65
Article no. 10131183

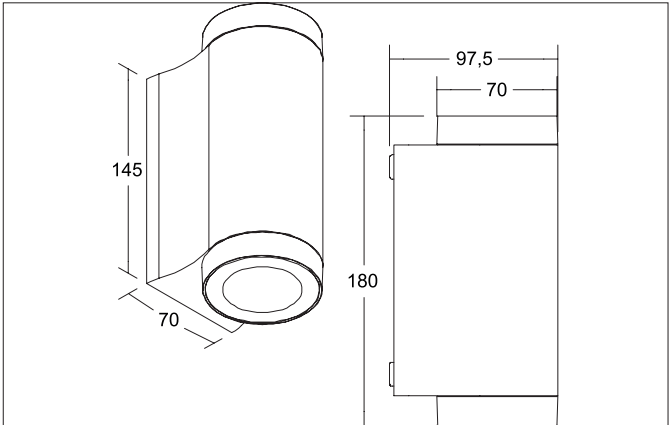

Tender
oval LED surface-mounted wall light, IP65, switchable, luminaire length 180 mm, luminaire width 70 mm, height 95 mm, weight 0.902 kg, with rotationally symmetrical narrow-wide beam light distribution. Transparent glass cover, rated luminous flux 1,500 lm, rated wattage 1 x 15 W, light color warm white to daylight white, most similar color temperature (CCT) 3,000 - 5,700 K, general color rendering index CRI > 80, housing material: aluminum / glass, color: black, permissible ambient temperature (ta): -20 to +45°C, protection class (EN 61140): I, degree of protection (DIN EN 60529): IP65, degree of impact resistance according to IEC62262: IK06. With electronic control gear, switchable.

Article data	
Article no.	10131183
GTIN	4251433971818
Series name	YLIP
Short description	LED wall surface mounted luminaire, IP65
Material	Aluminium / Glass
Colour	Black
Type of surface	Structure
Shape	Oval
Length	180 mm
Width	70 mm
Height	95 mm
Scope of delivery	Incl. converter for connection to the 230-V mains voltage, on/off switchable
Weight	0.902 kg
Conformance	CE, UKCA

YLIP LED wall surface mounted luminaire, IP65

Article no. 10131183

Lighting technology	
Colour temperature	3.000 K / 4.000 K / 5.700 K
Light colour	White
Color Temperature 1	3,000 K
Color Temperature 2	4,000 K
Color Temperature 3	5,700 K
Light output	Direct/Indirect
Luminous flux	1,500 lm
Luminous flux 1	1,390 lm
Luminous flux 2	1,640 lm
Luminous flux 3	1,500 lm
System efficiency	100 lm/W
Colour rendering	CRI > 80
Luminaire optics	Lens
Reflector	Without
Beam angle	45°
Light sharing	Symmetric
Adjustable color temperature	Stages

Operating technology of the luminaire	
System output	15 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Frequency min	50 Hz
Lamp	LED
Lamp holder	Without fitting
Protection class	I
Degree of protection	IP65
Ambient temperature	-20 to +45°C
Control	on/off
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.

Mounting technology	
Mounting method	Surface mounting
Place of installation	Wall-mounted
Adjustability	Not adjustable
Impact resistance	IK06
Material cover	Glass transparent
Suitable for through-wiring	Yes

Packing data	
Gross weight	1.036 kg
Length of packaging	215 mm
Packaging width	105 mm
Packaging height	135 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>