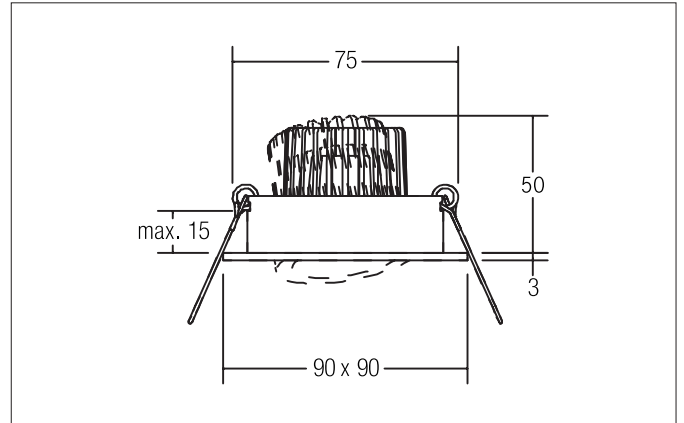


**JANIA-S LED recessed spot set, on/off switchable**

Article no. 38310253

Light.  
For Generations.**Tender**

LED recessed spot set, on/off switchable, Square. Toolless ceiling installation by installation springs. Ceiling cut-out  $\varnothing$  75 mm, Installation depth 50 mm, Length 90 mm, Width 90 mm, Weight 0,167 kg. Reflector silver with rotationssymmetrical, deep, wide distributed light intensity. optimal light distribution due to a glass transparent cover. Luminous flux 680 lm, Power 1 x 6 W, Light colour warm white, Correlated color temperature (CCT) 3.000 K, Colour rendering index CRI > 80, Housing material: Aluminium / Glass, Colour: Alu, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): II, Degree of protection (DIN EN 60529): IP20, .With electronic driver, on/off switchable.

**Product Benefits**

- LED recessed spotlight in square design made of solid aluminum.  
with LED module 6 W (3,000 K) and switchable converter.
- Ceiling cut-out 75 mm, diameter 93 mm, installation depth 50 mm, IP20.
- Pivoting range 30°.
- Without visible snap ring.
- Classic, formally restrained design.
- In the same optics also available in GX5.3 or GU10 version and as dimmable set (phase section).
- In addition, in the same surface structure and in the same color also available in round design.

**JANIA-S LED recessed spot set, on/off switchable**

Article no. 38310253

Light.  
For Generations.

| Article data       |  |
|--------------------|--|
| Article no.        | 38310253                                 |
| GTIN               | 4251433909989                            |
| Series name        | JANIA-S                                  |
| Short description  | LED recessed spot set, on/off switchable |
| Material           | Aluminium / Glass                        |
| Colour             | Alu                                      |
| Type of surface    | Matt                                     |
| Shape              | Square                                   |
| Built-in diameter  | 75 mm                                    |
| Installation depth | 50 mm                                    |
| Length             | 90 mm                                    |
| Width              | 90 mm                                    |
| Height             | 3 mm                                     |
| Weight             | 0.167 kg                                 |

| Lighting technology          |            |
|------------------------------|------------|
| Colour temperature           | 3.000 K    |
| Light colour                 | White      |
| Light output                 | Direct     |
| Luminous flux                | 680 lm     |
| System efficiency            | 113 lm/W   |
| Colour rendering             | CRI > 80   |
| Reflector                    | High-gloss |
| Reflektorfarbe               | silver     |
| Beam angle                   | 38°        |
| Light sharing                | Symmetric  |
| Adjustable color temperature | No         |

| Operating technology of the luminaire |  |
|---------------------------------------|--|
| Lamp holder                           | Plug&Play  |
| Power                                 | 6 W  |
| Voltage type                          | DC   |
| Current                               | 350 mA   |
| Lamp                                  | LED  |
| Protection class                      | III  |
| Degree of protection                  | IP20   |
| Bulb change possible                  | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |

| Operating technology of driver |                 |
|--------------------------------|-----------------|
| Length                         | 68 mm           |
| Width                          | 35 mm           |
| Height                         | 21 mm           |
| AC nominal voltage min         | 220 V           |
| AC nominal voltage max         | 240 V           |
| Frequenz max.                  | 50 Hz           |
| Dimmable                       | No              |
| Control                        | on/off          |
| Starting current               | 10 A (max.10ms) |
| Power min                      | 1 W             |
| Power                          | 7.2 W           |
| Current                        | 350 mA          |
| Degree of protection           | IP20            |
| Protection class               | II              |
| Flickerfrei                    | Yes             |

**JANIA-S LED recessed spot set, on/off switchable**

Article no. 38310253

Light.  
For Generations.

| Mounting technology         |   |
|-----------------------------|---|
| Mounting method             | Recessed mounting                         |
| Place of installation       | Ceiling-mounted                           |
| Adjustability               | Rotable and pivoted                       |
| Swivel angle                | 30°                                       |
| Rotation angle              | 355°                                      |
| Max. ceiling thickness      | 15 mm                                     |
| Further references          | No cover with thermal insulation material |
| Material cover              | Glass transparent                         |
| Circlip                     | Without circlip                           |
| Suitable for through-wiring | Yes, with optional accessories            |

| Packing data            |   |
|-------------------------|---|
| Gross weight            | 0.2 kg  |
| Length of packaging     | 100 mm  |
| Packaging width         | 100 mm  |
| Packaging height        | 100 mm  |
| Disposal at end of life | This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.<br>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment. |