
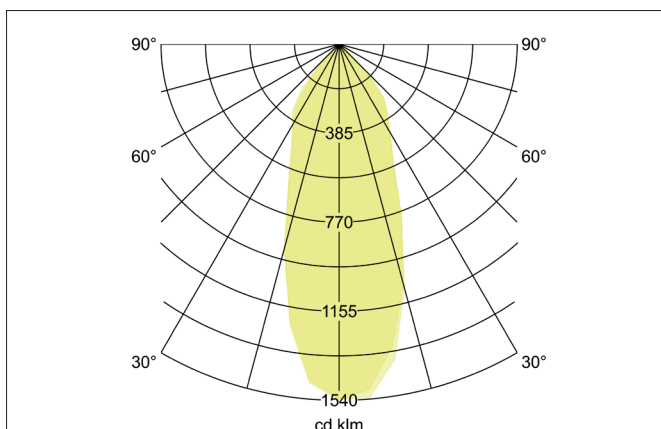
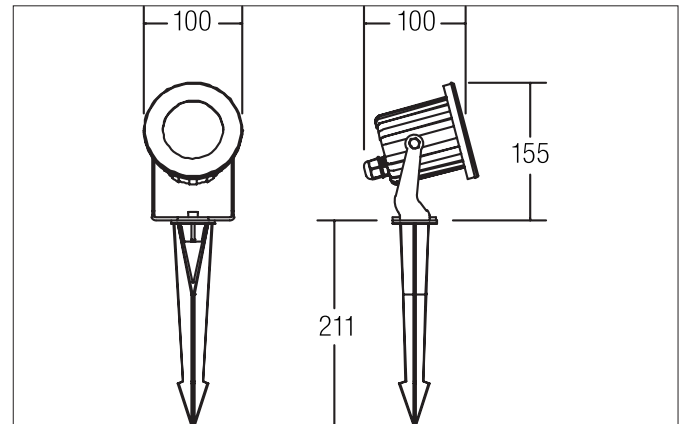


**STIRIUS LED ground spike spotlight 230V, 6W, IP65**

Article no. 60103223


**Tender**

LED ground spike spotlight 230V, 6W, IP65, Round. Ceiling cut-out Installation depth mm, Outer diameter 100 mm, Weight 0,750 kg, with rotationssymmetrical, deep, wide distributed light intensity. Cover glass transparent. Luminous flux 450 lm, Power 1 x 6 W, Light colour warm white, Correlated color temprature (CCT) 3.000 K, Colour rendering index CRI > 80, Housing material: Stainless steel / Aluminium / Glass, Colour: Black, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP65. With electronic driver, on/off switchable.

| Article data      |  |
|-------------------|--|
| Article no.       | 60103223   |
| GTIN              | 4250047781561  |
| Series name       | STIRIUS  |
| Short description | LED ground spike spotlight 230V, 6W, IP65  |
| Material          | Stainless steel / Aluminium / Glass  |
| Colour            | Black  |
| Shape             | Round  |
| Outer diameter    | 100 mm   |
| Hight             | 298 mm   |
| Scope of delivery | Incl. converter for connection to the 230-V mains voltage, on/off, 2,000 mm connecting cable and plug. |
| Weight            | 0.750 kg   |
| Conformance       | CE   |

**STIRIUS LED ground spike spotlight 230V, 6W, IP65**

Article no. 60103223

| Lighting technology          |            |
|------------------------------|------------|
| Colour temperature           | 3.000 K    |
| Light colour                 | White      |
| Luminous flux                | 450 lm     |
| System efficiency            | 75 lm/W    |
| Colour rendering             | CRI > 80   |
| Reflector                    | High-gloss |
| Beam angle                   | 40°        |
| Light sharing                | Symmetric  |
| Adjustable color temperature | No         |

| Operating technology of the luminaire |  |
|---------------------------------------|--|
| System output                         | 6 W  |
| Voltage type                          | AC   |
| AC nominal voltage max                | 230 V  |
| Frequency max                         | 50 Hz  |
| Lamp                                  | LED  |
| Lamp holder                           | Without fitting  |
| Protection class                      | I  |
| Degree of protection                  | IP65   |
| Control                               | on/off   |
| Bulb change possible                  | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |

| Mounting technology   |                   |
|-----------------------|-------------------|
| Mounting method       | Recessed mounting |
| Place of installation | Floor-mounted     |
| Adjustability         | Head adjustable   |
| Swivel angle          | 90°               |
| Rotation angle        | 355°              |
| Over rollable         | No                |
| Material cover        | Glass transparent |

| Packing data            |  |
|-------------------------|--|
| Gross weight            | 0.978 kg   |
| Length of packaging     | 115 mm   |
| Packaging width         | 115 mm   |
| Packaging height        | 220 mm   |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |