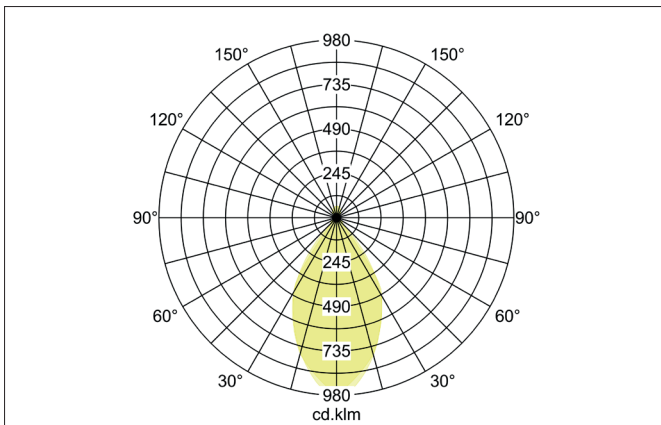
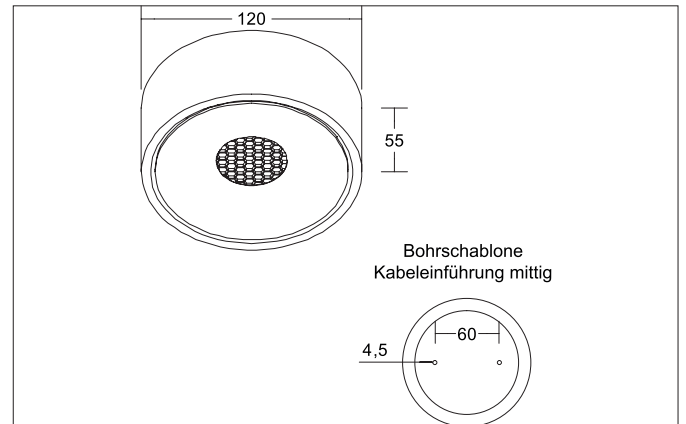


INDY ED surface mounted downlight with indirect component, trailing-edge phase dimmable

Article no. 12066173

Light.
For Generations.

Tender

ED surface mounted downlight with indirect component, trailing-edge phase dimmable, Round. Luminaire diameter 120.0 mm, Height 55.0 mm, Weight 0.518 kg, Reflector silver with rotationally symmetrical, deep, wide distributed light intensity. Luminous flux 1.370 lm, Power 1 x 14,2 W, Light colour warm white, Correlated colour temperature (CCT) 3.000 K, Colour rendering index CRI > 90, Rated life time L70/B10 at 25 °C: 50.000 h, Housing material: Aluminium, Colour: White, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP20, .With electronic driver, Trailing-edge phase dimmable.

| Article data | |
|-------------------|--|
| Article no. | 12066173 |
| GTIN | 4251433955108 |
| Series name | INDY |
| Short description | ED surface mounted downlight with indirect component, trailing-edge phase dimmable |
| Material | Aluminium |
| Colour | White |
| Type of surface | Structure |
| Shape | Round |
| Outer diameter | 120 mm |
| Height | 55 mm |
| Scope of delivery | incl. converter for connection to 230 V mains voltage, trailing-edge phase dimmer |
| Weight | 0.518 kg |

INDY ED surface mounted downlight with indirect component, trailing-edge phase dimmable

Article no. 12066173

Light.
For Generations.

| Lighting technology | |
|------------------------------|-----------------|
| Colour temperature | 3.000 K |
| Light colour | White |
| Light output | Direct/Indirect |
| Luminous flux | 1,370 lm |
| System efficiency | 96 lm/W |
| Colour rendering | CRI > 90 |
| Reflector | High-gloss |
| Reflector colour | silver |
| Beam angle | 36° |
| Light sharing | Symmetric |
| Adjustable color temperature | No |

| Operating technology of the luminaire | |
|---------------------------------------|--|
| System output | 14.2 W |
| Voltage type | AC |
| AC nominal voltage max | 230 V |
| Frequenz max. | 50 Hz |
| Lamp | LED |
| Protection class | I |
| Degree of protection | IP20 |
| Dimmable | Yes |
| Control | Trailing-edge phase |
| Bulb change possible | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |

| Mounting technology | |
|-----------------------|------------------|
| Mounting method | Surface mounting |
| Place of installation | Ceiling-mounted |
| Adjustability | Not adjustable |
| stamp | UKCA |
| Material cover | Without cover |

| Packing data | |
|-------------------------|---|
| Gross weight | 0.625 kg |
| Length of packaging | 155 mm |
| Packaging width | 155 mm |
| Packaging height | 80 mm |
| Disposal at end of life | This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment. |