

Article no. 12287153

BRUMBERG



INDIWO83-S LED-Einbaustrahler, IP44, dreh- und schwenkbar

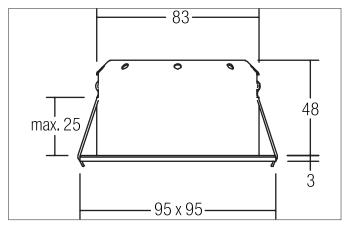



$\frac{2}{100} \approx \frac{1}{100}$

Tender

LED-Einbaustrahler, IP44, dreh- und schwenkbar.Toolless ceiling installation by installation springs. Ceiling cut-out Ø 83 mm, Installation depth 48 mm, Length 95 mm, Width 95 mm, Weight 0,287 kg, Reflector silver with rotattionssymmetrical, deep, wide distributed light intensity. Cover plastic, transparent. Luminous flux 510 lm, Power 1 x 6 W, Light colour warm white, Correlated color temprature (CCT) 3.000 K, Colour rendering index CRI > 85, Housing material: Aluminium / Steel / Silicone rubber / PMMA, Colour: Nickel, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): III, Degree of protection (DIN EN 60529): IP44. For connection to an external driver, which is not included in the scope of delivery of the luminaire. Depending on driver dimmable.

Product Benefits

- Einbaustrahler in quadratischer Bauform aus massivem Aluminium
- und Schutzkappe zum Direkteinbau in Wärmedämmmaterial.
- Dreh- und schwenkbar.
- Deckenausschnitt 83 mm, Länge 95 mm, Breite 95 mm, Einbautiefe 48 mm, Lichtstrom 510 lm, IP44 (bei Einbau in geschlossenen Decken).
- Bei Verwendung eines geeigneten Konverters dimmbar.

INDIWO83-S LED-Einbaustrahler, IP44, dreh- und schwenkbar

Article no. 12287153



Article data	
Article no.	12287153
GTIN	4251433906155
Series name	INDIWO83-S
Short description	LED-Einbaustrahler, IP44, dreh- und schwenkbar
Material	Aluminium / Steel / Silicone rubber / PMMA
Colour	Nickel
Type of surface	Matt
Shape	Square
Length	95 mm
Width	95 mm
Built-in diameter	83 mm
Installation depth	48 mm
Hight	3 mm
Weight	0.287 kg
Conformance	CE, UKCA

Lighting technology	
Colour temperature	3.000 K
Light colour	White
Light output	Direct
Luminous flux	510 lm
System efficiency	85 lm/W
Colour rendering	CRI > 85
Reflector	Faceted
Reflector colour	silver
Beam angle	36°
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	6 W
Voltage type	DC
Current	350 mA
Lamp	LED
Lamp holder	Plug&Play
Protection class	
Protection class on the ceiling side	IP20
Degree of protection	IP44
Dimmable	Depending on type of control gear
Control	Depending on driver
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service
	technician commissioned by him or a similarly qualified person.
Energy efficiency class	nicht erforderlich

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Rotable and pivoted
Swivel angle	30°
Rotation angle	30°
Max. ceiling thickness	25 mm
Material cover	Plastic, transparent



INDIWO83-S LED-Einbaustrahler, IP44, dreh- und schwenkbar Article no. 12287153

Packing data	
Gross weight	0.335 kg
Length of packaging	110 mm
Packaging width	100 mm
Packaging hight	85 mm
	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.
Disposal at end of life	By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that
	harmful substances get into the environment.



INDIWO83-S LED-Einbaustrahler, IP44, dreh- und schwenkbar

Article no. 12287153

Required accessories
Article no.: 17662000
LED-Konverter 350 mA, schaltbar
Power: 1 - 7,2 W, Plug&Play
Dimensions: 68 mm x 35 mm x 21 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17662000_2021_DE.pdf
Article no.: 17662010
LED-Konverter 350 mA, schaltbar
Power: 1 - 7,2 W, ohne Konfektionierung
Dimensions: 35 mm x 21 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17662010_2021_DE.pdf
Article no.: 17662020
LED-Konverter 350 mA, schaltbar
Power: 1 - 7,2 W, Plug&Play + Anschlussbox
Dimensions: 35 mm x 21 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf
Article no.: 17613000
LED-Konverter 350 mA, schaltbar
Power: 1 - 15 W, Plug&Play
Dimensions: 115 mm x 34 mm x 19 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf
Article no.: 17613010
LED-Konverter 350 mA, schaltbar
Power: 1 - 15 W, ohne Konfektionierung
Dimensions: 115 mm x 34 mm x 19 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17613010_2021_DE.pdf
Article no.: 17613020
LED-Konverter 350 mA, schaltbar
Power: 1 - 15 W, Plug&Play + Anschlussbox
Dimensions: 115 mm x 34 mm x 19 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf
Article no.: 17621000
LED-Konverter 350 mA, schaltbar
Power: 1 - 21 W, Plug&Play
Dimensions: 128 mm x 50 mm x 13 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf
Article no.: 17621010
LED-Konverter 350 mA, schaltbar
Power: 1 - 21 W, ohne Konfektionierung
Dimensions: 128 mm x 50 mm x 13 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17621010_2021_DE.pdf
Article no.: 17621020
LED-Konverter 350 mA, schaltbar
Power: 1 - 21 W, Plug&Play + Anschlussbox
Dimensions: 128 mm x 50 mm x 13 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf
Article no.: 17663000
LED-Konverter 350 mA, Phasenabschnitt dimmbar
Power: 2,8 - 7 W, Plug&Play
Dimensions: 110 mm x 50 mm x 19 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17663000_2021_DE.pdf

BRUMBERG

INDIW083-S LED-Einbaustrahler, IP44, dreh- und schwenkbar

Article no. 12287153

Required accessories
Article no.: 17663010
LED-Konverter 350 mA, Phasenabschnitt dimmbar
Power: 2,8 - 7 W, ohne Konfektionierung
Dimensions: 110 mm x 50 mm x 19 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17663010_2021_DE.pdf
Article no.: 17663020
LED-Konverter 350 mA, Phasenabschnitt dimmbar
Power: 2,8 - 7 W, Plug&Play + Anschlussbox
Dimensions: 110 mm x 50 mm x 19 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf
Article no.: 17652000
LED-Rundkonverter 350 mA, Phasenabschnitt dimmbar
Power: 4,9 - 7 W, Plug&Play
Dimensions: 51 mm x 24 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf
Article no.: 17652020
LED-Rundkonverter 350 mA, Phasenabschnitt dimmbar
Power: 4,9 - 7 W, Plug&Play + Anschlussbox
Dimensions: 51 mm x 24 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17652020_2021_DE.pdf
Article no.: 17640000
LED-Konverter 350 mA, Phasenabschnitt dimmbar
Power: 4,2 - 10 W, Plug&Play
Dimensions: 102 mm x 38 mm x 21 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17640000_2021_DE.pdf
Article no.: 17640010
LED-Konverter 350 mA, Phasenabschnitt dimmbar
Power: 4,2 - 10 W, ohne Konfektionierung
Dimensions: 102 mm x 38 mm x 21 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17640010_2021_DE.pdf
Article no.: 17640020
LED-Konverter 350 mA, Phasenabschnitt dimmbar
Power: 4,2 - 10 W, Plug&Play + Anschlussbox Dimensions: 102 mm x 38 mm x 21 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17640020_2021_DE.pdf
Article no.: 17648000
LED-Konverter 350 mA, Phasenabschnitt dimmbar Power: 0,7 - 17 W, Plug&Play
Dimensions: 166 mm x 46 mm x 34 mm
https://www.brumberg.com/fileadmin/products/Datenblatt 17648000 2021 DE.pdf
Article no.: 17648010
LED-Konverter 350 mA, Phasenabschnitt dimmbar
Power: 0,7 - 17 W, ohne Konfektionierung
Dimensions: 166 mm x 46 mm x 34 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17648010_2021_DE.pdf
Article no.: 17648020
LED-Konverter 350 mA, Phasenabschnitt dimmbar
Power: 0,7 - 17 W, Plug&Play + Anschlussbox
Dimensions: 166 mm x 46 mm x 34 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17648020_2021_DE.pdf



INDIWO83-S LED-Einbaustrahler, IP44, dreh- und schwenkbar Article no. 12287153

Required accessories
Article no.: 17657000
LED-Konverter 350 mA, 1-10 V dimmbar (analog)
Power: 5,2 - 18 W, Plug&Play
Dimensions: 110 mm x 52 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17657000_2021_DE.pdf
Article no.: 17657010
LED-Konverter 350 mA, 1-10 V dimmbar (analog)
Power: 5,2 - 18 W, ohne Konfektionierung
Dimensions: 110 mm x 52 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17657010_2021_DE.pdf
Article no.: 17684000
LED-Konverter 350 mA, DALI dimmbar (digital)
Power: 2,8 - 7 W, Plug&Play
Dimensions: 130 mm x 42 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17684000_2021_DE.pdf
Article no.: 17684010
LED-Konverter 350 mA, DALI dimmbar (digital) Power: 2,8 - 7 W, ohne Konfektionierung
Dimensions: 130 mm x 42 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17684010_2021_DE.pdf
Article no.: 17684020
LED-Konverter 350 mA, DALI dimmbar (digital)
Power: 2,8 - 7 W, Plug&Play + Anschlussbox
Dimensions: 130 mm x 42 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17684020_2021_DE.pdf
Article no.: 17658000
LED-Rundkonverter 350 mA, DALI dimmbar (digital)
Power: 2,1 - 9 W, Plug&Play
Dimensions: 56 mm x 25 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17658000_2021_DE.pdf
Article no.: 17658010
LED-Rundkonverter 350 mA, DALI dimmbar (digital)
Power: 2,1 - 9 W, ohne Konfektionierung
Dimensions: 56 mm x 25 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17658010_2021_DE.pdf
Article no.: 17658020
LED-Rundkonverter 350 mA, DALI dimmbar (digital)
Power: 2,1 - 9 W, Plug&Play + Anschlussbox
Dimensions: 56 mm x 25 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17658020_2021_DE.pdf
Article no.: 17683000
LED-Konverter 350 mA, DALI dimmbar (digital)
Power: 3,5 - 17 W, Plug&Play
Dimensions: 110.5 mm x 52 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17683000_2021_DE.pdf
Article no.: 17683010
LED-Konverter 350 mA, DALI dimmbar (digital)
Power: 3,5 - 17 W, ohne Konfektionierung
Dimensions: 110.5 mm x 52 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17683010_2021_DE.pdf



INDIW083-S LED-Einbaustrahler, IP44, dreh- und schwenkbar

Article no. 12287153

Required accessories
Article no.: 17683020
LED-Konverter 350 mA, DALI dimmbar (digital)
Power: 3,5 - 17 W, Plug&Play + Anschlussbox
Dimensions: 110.5 mm x 52 mm x 22 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17683020_2021_DE.pdf
Article no.: 17671000
LED-Konverter 350mA, ZigBee dimmbar
Power: 3,5 - 18,5 W, Plug&Play
Dimensions: 146.5 mm x 44 mm x 30 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17671000_2021_DE.pdf
Article no.: 17671010
LED-Konverter 350mA, ZigBee dimmbar
Power: 3,5 - 18,5 W, ohne Konfektionierung
Dimensions: 146.5 mm x 44 mm x 30 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17671010_2021_DE.pdf
Article no.: 17671020 LED-Konverter 350mA, ZigBee dimmbar
Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox
Dimensions: 146.5 mm x 44 mm x 30 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf
Article no.: 17672000
LED-Konverter 350mA, Casambi dimmbar
Power: 3,5 - 18,5 W, Plug&Play Dimensions: 146.5 mm x 44 mm x 30 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf
Article no.: 17672010
LED-Konverter 350mA, Casambi dimmbar
Power: 3,5 - 18,5 W, ohne Konfektionierung
Dimensions: 146.5 mm x 44 mm x 30 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17672010_2021_DE.pdf
Article no.: 17672020
LED-Konverter 350mA, Casambi dimmbar
Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox
Dimensions: 146.5 mm x 44 mm x 30 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_17672020_2021_DE.pdf
Article no.: 3835
Plug&Play-Verlängerungsleitung 350 mA
Dimensions: 500 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_00003835_2021_DE.pdf
Article no.: 3836
Plug&Play-Verlängerungsleitung 350 mA
Dimensions: 1,000 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_00003836_2021_DE.pdf
Article no.: 3837
Plug&Play-Verlängerungsleitung 350 mA
Dimensions: 2,000 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_00003837_2021_DE.pdf



INDIWO83-S LED-Einbaustrahler, IP44, dreh- und schwenkbar Article no. 12287153

tional accessories	
ticle no.: 3835	
ig&Play-Verlängerungsleitung 350 mA	
nensions: 500 mm	
ps://www.brumberg.com/fileadmin/products/Datenblatt_00003835_2021_DE.pdf	
ticle no.: 3836	
ig&Play-Verlängerungsleitung 350 mA	
nensions: 1,000 mm	
ps://www.brumberg.com/fileadmin/products/Datenblatt_00003836_2021_DE.pdf	
iicle no.: 3837	
ig&Play-Verlängerungsleitung 350 mA	
nensions: 2,000 mm	
ps://www.brumberg.com/fileadmin/products/Datenblatt_00003837_2021_DE.pdf	