
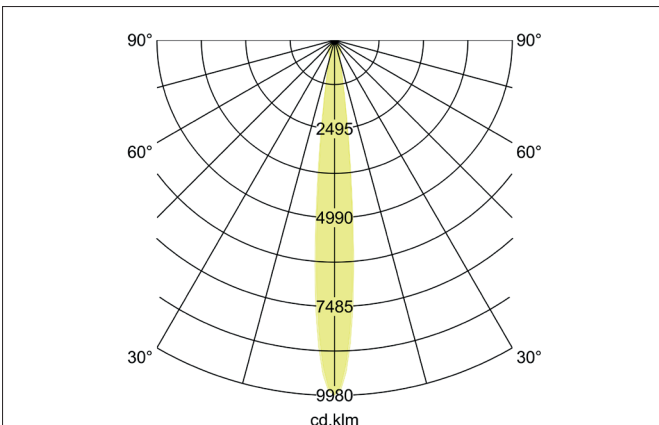


**CUBA LED surface-mounted spot, rotatable and pivoted, on/off switchable**

Article no. 12307183

Light.  
For Generations.

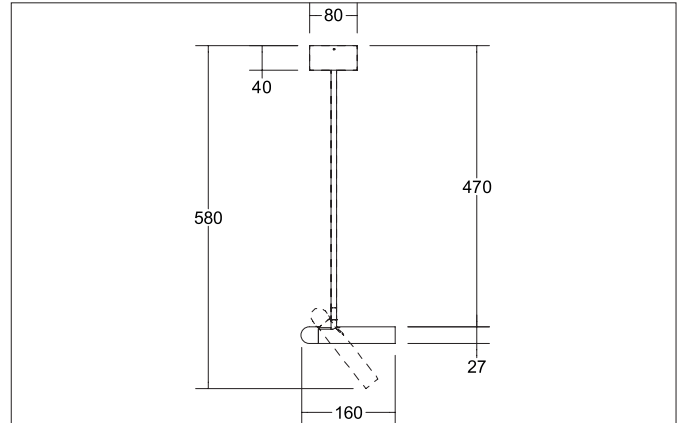

**Tender**  
LED surface-mounted spot, rotatable and pivoted, on/off switchable, Round., Hight 580.0 mm Weight 0.42 kg, Reflector silver with rotattions-symmetrical, deep, wide distributed light intensity. Luminous flux 250 lm, Power 1 x 4,2 W, Colour rendering index CRI > 90, Housing material: Aluminium, Colour: Black structure, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP20, .With electronic driver, on/off switchable.

| Article data      |  |
|-------------------|--|
| Article no.       | 12307183   |
| GTIN              | 4251433932406  |
| Series name       | CUBA   |
| Short description | LED surface-mounted spot, rotatable and pivoted, on/off switchable           |
| Material          | Aluminium  |
| Colour            | Black  |
| Type of surface   | Structure  |
| Shape             | Round  |
| Hight             | 580 mm   |
| Scope of delivery | Incl. converter for connection to the 230-V mains voltage, on/off switchable |
| Weight            | 0.420 kg   |

**CUBA LED surface-mounted spot, rotatable and pivoted, on/off switchable**

Article no. 12307183

Light.  
For Generations.

| Lighting technology          |            |
|------------------------------|------------|
| Colour temperature           | 3.000 K    |
| Light output                 | Direct     |
| Luminous flux                | 250 lm     |
| System efficiency            | 60 lm/W    |
| Colour rendering             | CRI > 90   |
| Reflector                    | High-gloss |
| Reflector colour             | silver     |
| Beam angle                   | 38°        |
| Light sharing                | Symmetric  |
| Adjustable color temperature | No         |

| Operating technology of the luminaire |  |
|---------------------------------------|--|
| System output                         | 4.2 W  |
| Voltage type                          | AC   |
| AC nominal voltage max                | 230 V  |
| Frequenz max.                         | 50 Hz  |
| Lamp                                  | LED  |
| Lamp holder                           | Without fitting  |
| Protection class                      | I  |
| Degree of protection                  | IP20   |
| Dimmable                              | No   |
| Control                               | on/off   |
| Bulb change possible                  | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |

| Mounting technology         |                  |
|-----------------------------|------------------|
| Mounting method             | Surface mounting |
| Place of installation       | Ceiling-mounted  |
| Adjustability               | Head adjustable  |
| Swivel angle                | 40°              |
| Rotation angle              | 355°             |
| Head adjustable angle       | 40°              |
| stamp                       | UKCA             |
| Pendulum length min.        | 400 mm           |
| Material cover              | Without cover    |
| Suitable for through-wiring | Yes              |

| Packing data            |   |
|-------------------------|---|
| Gross weight            | 0.793 kg  |
| Length of packaging     | 605 mm  |
| Packaging width         | 135 mm  |
| Packaging height        | 100 mm  |
| Disposal at end of life | This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.<br>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment. |