

Article no. 12527074









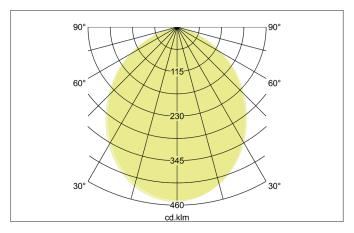

Tender

LED recessed downlight, opal cover, matt white, round. Designed in a compact design for tool-free quick installation for recessed ceiling mounting. Version: Plug&Play, Mounting type: Recessed mounting, Mounting location: Ceiling mounting, Material: Aluminum / PMMA, Protection rating on room side: to DIN EN 60529: IP20, Protection class: (EN 61140) III, Power: 12 W, Luminous flux: 990 Im, Colour temperature: 4,000 K, Beam angle: 95°, Adjustability: Non-adjustable, without control gear, Dimmable: Dependent on control gear, Type of dimming: Dependent on control gear.

Product Benefits

- Einbaudownlight in runder Bauform aus massivem Aluminium mit opaler PMMA-Abdeckung
- Deckenausschnitt 120 mm, Außendurchmesser 136 mm, Einbautiefe 50 mm, Lichtstrom 960 / 990 lm, IP20.
- · Vertiefter Lichtaustritt.
- Bei Verwendung eines geeigneten Konverters dimmbar.
- Alternativ auch in zwei weiteren Größen lieferbar.

BRUMBERG Light. Since 1873.

BOWL MINI LED recessed downlight

Article no. 12527074

Article data	
Article no.	12527074
GTIN	4251433917809
Series name	BOWL MINI
Short description	LED recessed downlight
Material	Aluminium / PMMA
Colour	white matt
Type of surface	Matt
Shape	Round
Outer diameter	136 mm
Built-in diameter	120 mm
Installation depth	50 mm
Hight	4 mm
Weight	0.285 kg
Conformance	CE, UKCA

Lighting technology	
Colour temperature	4.000 K
Light colour	white
Light output	Direct
Luminous flux	990 lm
Colour rendering	CRI > 80
Reflector	Without
Beam angle	95°
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
Voltage type	DC
Current	350 mA
Lamp	LED
Lamp holder	Plug&Play
Protection class	
Degree of protection	IP20
Dimmable	Depending on type of control gear
Control	Depending on driver
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service
	technician commissioned by him or a similarly qualified person.
Rated life time L70/B50 at 25 °C	50,000 h
Energy efficiency class	nicht erforderlich

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Max. ceiling thickness	21 mm
Further references	No cover with thermal insulation material
Material cover	Plastic, opal
Suitable for through-wiring	Yes, with optional accessories

Article no. 12527074



Packing data	
Gross weight	0.458 kg
Length of packaging	220 mm
Packaging width	150 mm
Packaging hight	95 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.
	By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that
	harmful substances get into the environment.

Article no. 12527074



Required accessories

Article no.: 17613000

LED converter 350 mA, on/off switchable

Power: 1 - 15 W, Plug&Play

Dimensions: 115 mm x 34 mm x 19 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf

Article no.: 17613020

LED converter 350 mA, on/off switchable Power: 1 - 15 W, Plug&Play + Anschlussbox Dimensions: 115 mm x 34 mm x 19 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf

Article no.: 17621000

LED converter 350 mA, on/off switchable

Power: 1 - 21 W, Plug&Play

Dimensions: 128 mm x 50 mm x 13 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf

Article no.: 17621020

LED converter 350 mA, on/off switchable Power: 1 - 21 W, Plug&Play + Anschlussbox Dimensions: 128 mm x 50 mm x 13 mm

https://www.brumberg.com/fileadmin/products/Datenblatt 17621020 2021 DE.pdf

Article no.: 17664000

LED converter 350 mA, trailing-edge phase dimmable

Power: 10,2 - 14 W, Plug&Play

Dimensions: 125 mm x 51 mm x 20 mm

https://www.brumberg.com/fileadmin/products/Datenblatt 17664000 2021 DE.pdf

Article no.: 17664020

LED converter 350 mA, trailing-edge phase dimmable Power: 10,2 - 14 W, Plug&Play + Anschlussbox Dimensions: 125 mm x 51 mm x 20 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17664020_2021_DE.pdf

Article no.: 17643000

LED converter 350 mA, trailing-edge phase dimmable

Power: 8,8 - 18 W, Plug&Play

Dimensions: 110.5 mm x 52 mm x 22 mm

https://www.brumberg.com/fileadmin/products/Datenblatt 17643000 2021 DE.pdf

Article no.: 17643020

LED converter 350 mA, trailing-edge phase dimmable Power: 8,8 - 18 W, Plug&Play + Anschlussbox Dimensions: 110.5 mm x 52 mm x 22 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17643020_2021_DE.pdf

Article no.: 17648000

LED converter 350 mA, trailing-edge phase dimmable

Power: 0,7 - 17 W, Plug&Play

Dimensions: 166 mm x 46 mm x 34 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17648000_2021_DE.pdf

Article no.: 17648020

LED converter 350 mA, trailing-edge phase dimmable Power: 0,7 - 17 W, Plug&Play + Anschlussbox Dimensions: 166 mm x 46 mm x 34 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17648020_2021_DE.pdf

Article no. 12527074



Required accessories

Article no.: 17657000

LED converter 350 mA, 1-10 V dimmable (analog)

Power: 5,2 - 18 W, Plug&Play

Dimensions: 110 mm x 52 mm x 22 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17657000_2021_DE.pdf

Article no.: 17683000

LED converter 350 mA, DALI dimmable (digital)

Power: 3,5 - 17 W, Plug&Play

Dimensions: 110.5 mm x 52 mm x 22 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17683000_2021_DE.pdf

Article no.: 17683020

LED converter 350 mA, DALI dimmable (digital) Power: 3,5 - 17 W, Plug&Play + Anschlussbox Dimensions: 110.5 mm x 52 mm x 22 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17683020_2021_DE.pdf

Article no.: 17671000

LED converter 350mA, ZigBee dimmable

Power: 3,5 - 18,5 W, Plug&Play

Dimensions: 146.5 mm x 44 mm x 30 mm

https://www.brumberg.com/fileadmin/products/Datenblatt 17671000 2021 DE.pdf

Article no.: 17671020

LED converter 350mA, ZigBee dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox Dimensions: 146.5 mm x 44 mm x 30 mm

https://www.brumberg.com/fileadmin/products/Datenblatt 17671020 2021 DE.pdf

Article no.: 17672000

LED converter 350mA, Casambi dimmable

Power: 3,5 - 18,5 W, Plug&Play

Dimensions: 146.5 mm x 44 mm x 30 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf

Article no.: 17672020

LED converter 350mA, Casambi dimmable Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox Dimensions: 146.5 mm x 44 mm x 30 mm

https://www.brumberg.com/fileadmin/products/Datenblatt 17672020 2021 DE.pdf

Optional accessories

Article no.: 3835

Plug & Play extension lead 350 mA

Dimensions: 500 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_00003835_2021_DE.pdf

Article no.: 3836

Plug & Play extension lead 350 mA

Dimensions: 1,000 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_00003836_2021_DE.pdf

Article no.: 3837

Plug & Play extension lead 350 mA

Dimensions: 2,000 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_00003837_2021_DE.pdf