
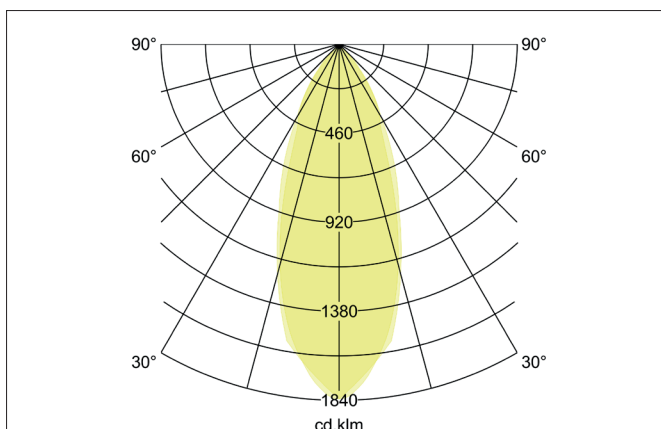
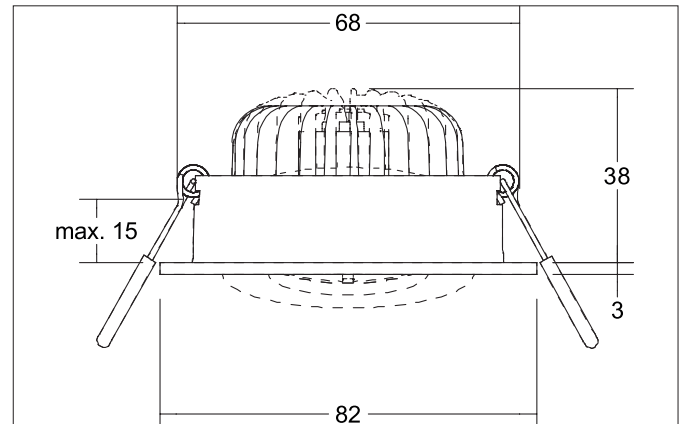



**BB33 LED-Einbaustrahler set, Phasenabschnitt dimmbar**

Article no. 39377183


**Tender**

Round LED recessed spotlight set, dimmable trailing edge, tool-free ceiling installation using installation springs. Ceiling cut-out Ø 68 mm, installation depth 38 mm, outer diameter 82 mm, weight 0.212 kg, silver reflector with rotationally symmetrical deep-wide beam light distribution. Cover PC (polycarbonate) transparent, rated luminous flux 680 lm, rated wattage 1 x 7 W, light color warm white, most similar color temperature (CCT) 3,000 K, general color rendering index CRI > 80, service life L70/B50 at 25 °C: 30,000 h, housing material: aluminum / polycarbonate, color: structured black, permissible ambient temperature (ta): -20 °C - +25 °C, protection class (EN 61140): II, degree of protection (DIN EN 60529): IP20. With electronic control gear, trailing edge dimmable.

**Product Benefits**

- LED-Einbaustrahler in runder Bauform aus massivem Aluminium mit LED-Modul 7 W (3.000 K) und phasendimmbarem Konverter.
- Deckenausschnitt 68 mm, Durchmesser 82 mm, Einbautiefe 38 mm, IP20.
- Schwenkbereich 20°.
- Ohne sichtbaren Sprengling.
- Klassische, formal zurückgenommene Formgebung.
- In gleicher Optik auch als schaltbares oder dimmbares Set DALI lieferbar.
- Zudem in gleicher Oberflächenstruktur und in gleicher Farbe auch in Ausführung quadratisch verfügbar.


**BB33 LED-Einbaustrahler, Phasenabschnitt dimmbar**

Article no. 39377183

| Article data       |                                             |
|--------------------|---------------------------------------------|
| Article no.        | 39377183                                    |
| GTIN               | 4251433947912                               |
| Series name        | BB33                                        |
| Short description  | LED-Einbaustrahler, Phasenabschnitt dimmbar |
| Material           | Aluminium / Polycarbonate                   |
| Colour             | Black                                       |
| Type of surface    | Structure                                   |
| Shape              | Round                                       |
| Outer diameter     | 82 mm                                       |
| Built-in diameter  | 68 mm                                       |
| Installation depth | 38 mm                                       |
| Hight              | 3 mm                                        |
| Weight             | 0.212 kg                                    |
| Conformance        | CE, UKCA                                    |

| Lighting technology          |           |
|------------------------------|-----------|
| Colour temperature           | 3.000 K   |
| Light colour                 | White     |
| Light output                 | Direct    |
| Luminous flux                | 680 lm    |
| System efficiency            | 97 lm/W   |
| Colour rendering             | CRI > 80  |
| Reflector                    | Faceted   |
| Reflector colour             | silver    |
| Beam angle                   | 40°       |
| Light sharing                | Symmetric |
| Adjustable color temperature | No        |

| Operating technology of the luminaire |          |
|---------------------------------------|----------|
| Power                                 | 6 W      |
| Voltage type                          | DC       |
| Current                               | 350 mA   |
| Lamp                                  | LED      |
| Protection class                      | III      |
| Degree of protection                  | IP20     |
| Rated life time L70/B50 at 25 °C      | 30,000 h |

| Operating technology of driver |                     |
|--------------------------------|---------------------|
| Article No. of used driver     | 17663010            |
| Length                         | 110 mm              |
| Width                          | 50 mm               |
| Hight                          | 19 mm               |
| AC nominal voltage min         | 198 V               |
| AC nominal voltage max         | 264 V               |
| Frequency max                  | 60 Hz               |
| Dimmable                       | Yes                 |
| Control                        | Trailing-edge phase |
| Starting current               | 1 A, 15,2 µs        |
| Power min                      | 2.8 W               |
| Power                          | 7 W                 |
| Output current                 | 350 mA              |
| Degree of protection           | IP20                |
| Protection class               | II                  |
| Flicker-free                   | Yes                 |


**BB33 LED-Einbaustrahler, Phasenabschnitt dimmbar**

Article no. 39377183

| Mounting technology         |                                           |
|-----------------------------|-------------------------------------------|
| Mounting method             | Recessed mounting                         |
| Place of installation       | Ceiling-mounted                           |
| Adjustability               | Pivoted                                   |
| Swivel angle                | 20°                                       |
| Max. ceiling thickness      | 15 mm                                     |
| Further references          | No cover with thermal insulation material |
| Material cover              | Polycarbonat clear                        |
| Suitable for through-wiring | Yes, with optional accessories            |

| Packing data            |                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gross weight            | 0.245 kg                                                                                                                                                                                                                                                                                                                                                                       |
| Length of packaging     | 115 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Packaging width         | 86 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Packaging height        | 63 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |

| Optional accessories                                                              |                                                                                                                                                                       |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Article no.: 81201180<br>Reducing ring D 110 mm, for luminaire cut-out size 68 mm | <a href="https://www.brumberg.com/fileadmin/products/Datenblatt_81201180_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_81201180_2021_DE.pdf</a> |
| Article no.: 81202180<br>Reducing ring D 130 mm, for luminaire cut-out size 68 mm | <a href="https://www.brumberg.com/fileadmin/products/Datenblatt_81202180_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_81202180_2021_DE.pdf</a> |
| Article no.: 81203180<br>Reducing ring D 145 mm, for luminaire cut-out size 68 mm | <a href="https://www.brumberg.com/fileadmin/products/Datenblatt_81203180_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_81203180_2021_DE.pdf</a> |
| Article no.: 83330000<br>Connection box 230 V AC, 3-pole                          |                                                                                                                                                                       |
| Dimensions: 80 mm x 41 mm x 34 mm                                                 | <a href="https://www.brumberg.com/fileadmin/products/Datenblatt_83330000_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_83330000_2021_DE.pdf</a> |