

## **RETAIL ONE LED track spotlight, 31W**

Article no. 88184164

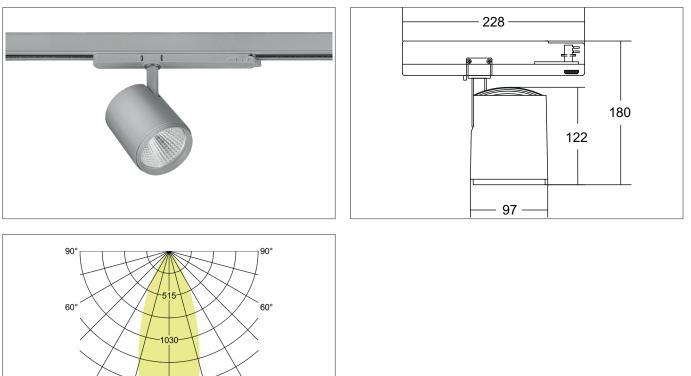



## Tender

Round LED track spotlight, rotatable and tiltable, switchable, luminaire diameter 97 mm, weight 0.870 kg, with rotationally symmetrical narrow-wide beam light distribution. Rated luminous flux 4,269 lm, rated wattage 1 x 33.5 W, neutral white light color, most similar color temperature (CCT) 4,000 K, general color rendering index CRI > 90, service life L80/B50 at 25 °C: 50,000 h, housing material: aluminum, color: textured silver, permissible ambient temperature (ta): -20 °C - +25 °C, protection class (EN 61140): I, degree of protection (DIN EN 60529): IP20. With electronic control gear, switchable.

Article data	
Article no.	88184164
GTIN	4251433976431
Series name	RETAIL ONE
Short description	LED track spotlight, 31W
Material	Aluminium
Colour	Silver
Type of surface	Structure
Shape	Round
Outer diameter	97 mm
Weight	0.870 kg
Conformance	CE, UKCA

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 08.04.2025 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/



## **RETAIL ONE LED track spotlight, 31W**

Article no. 88184164

Lighting technology	
Colour temperature	4.000 K
Light colour	White
Luminous flux	4,269 lm
System efficiency	127 lm/W
Colour rendering	CRI > 90
Reflector	High-gloss
Beam angle	40°
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	33.5 W
Voltage type	AC
AC nominal voltage min	220 V
AC nominal voltage max	230 V
Frequency max	50 Hz
Lamp	LED
Protection class	
Degree of protection	IP20
Control	on/off
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Rated life time L80/B50 at 25 °C	50.000 h
Energy efficiency class	nicht erforderlich
max. no. lights on B10 A	15
max. no. lights on B16 A	20
max. no. lights on C10 A	24
max. no. lights on C16 A	32

Mounting technology	
Mounting method	Surface mounting
Place of installation	Ceiling-mounted
Adjustability	Rotatable and adjustable head
Swivel angle	90°
Rotation angle	350°
Head adjustable angle	90°
Suitable for through-wiring	No

Packing data	
Gross weight	1 kg
Length of packaging	295 mm
Packaging width	110 mm
Packaging hight	170 mm
	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.
Disposal at end of life	By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 08.04.2025 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/