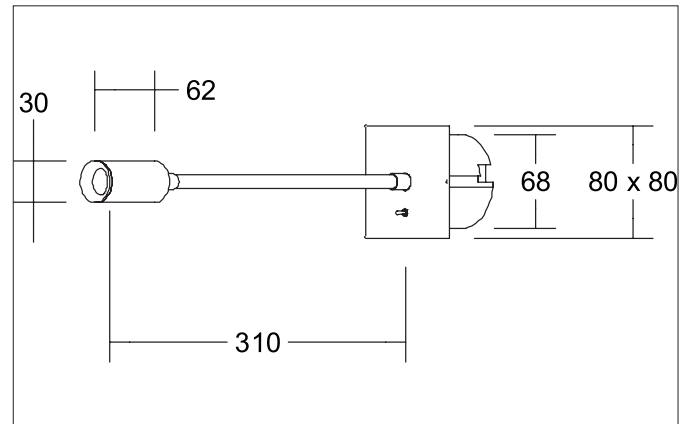
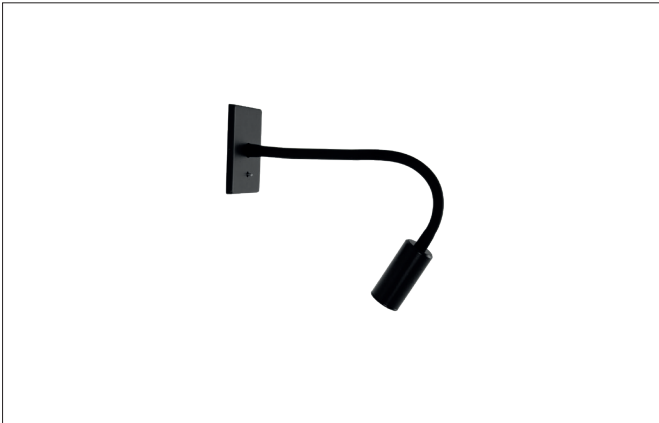


**ARCUS LED recessed reading light, for device socket, with cylinder head**

Article no. 10180083

Light.  
For Generations.**Tender**

LED recessed reading light, for device socket, with cylinder head, Square. Ceiling cut-out Ø 68 mm, Installation depth 65 mm, Length 80 mm, Width 80 mm, Weight 0,325 kg, with rotationssymmetrical, deep, wide distributed light intensity. optimal light distribution due to a glass transparent cover. Luminous flux 290 lm, Power 1 x 3,2 W, Light colour warm white, Correlated color temperature (CCT) 3.000 K, Colour rendering index CRI > 80, Housing material: Aluminium / Steel, Colour: Black, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP20, .With electronic driver, on/off switchable.

| Article data       |  |
|--------------------|--|
| Article no.        | 10180083   |
| GTIN               | 4251433932826  |
| Series name        | ARCUS  |
| Short description  | LED recessed reading light, for device socket, with cylinder head            |
| Material           | Aluminium / Steel  |
| Colour             | Black  |
| Shape              | Square   |
| Built-in diameter  | 68 mm  |
| Installation depth | 65 mm  |
| Length             | 80 mm  |
| Width              | 80 mm  |
| Scope of delivery  | Incl. converter for connection to the 230-V mains voltage, on/off switchable |
| Weight             | 0.325 kg   |
| Conformance        | CE, UKCA   |

**ARCUS LED recessed reading light, for device socket, with cylinder head**

Article no. 10180083

Light.  
For Generations.

| Lighting technology          |            |
|------------------------------|------------|
| Colour temperature           | 3.000 K    |
| Light colour                 | White      |
| Light output                 | Direct     |
| Luminous flux                | 290 lm     |
| System efficiency            | 69 lm/W    |
| Colour rendering             | CRI > 80   |
| Reflector                    | High-gloss |
| Beam angle                   | 41°        |
| Light sharing                | Symmetric  |
| Adjustable color temperature | No         |

| Operating technology of the luminaire |  |
|---------------------------------------|--|
| System output                         | 4.2 W  |
| Voltage type                          | AC   |
| AC nominal voltage max                | 230 V  |
| Frequency max                         | 50 Hz  |
| Lamp                                  | LED  |
| Lamp holder                           | Without fitting  |
| Protection class                      | I  |
| Degree of protection                  | IP20   |
| Dimmable                              | No   |
| Control                               | on/off   |
| Bulb change possible                  | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |

| Mounting technology   |                   |
|-----------------------|-------------------|
| Mounting method       | Recessed mounting |
| Place of installation | Wall-mounted      |
| Adjustability         | Head adjustable   |
| Material cover        | Glass transparent |

| Packing data            |   |
|-------------------------|---|
| Gross weight            | 0.431 kg  |
| Length of packaging     | 375 mm  |
| Packaging width         | 86 mm   |
| Packaging height        | 86 mm   |
| Disposal at end of life | This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.<br>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment. |