

BIRO SQUARE LED surface luminaire, DALI dimmable


Article no. 13710164

BRUMBERG

Light. For Generations.



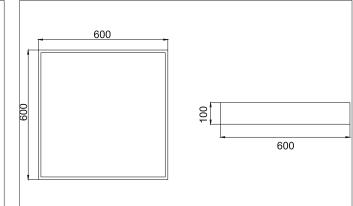





Tender

LED surface luminaire, DALI dimmable, Square.Luminaire length 600.0 mm, Luminaire width 600.0 mm, Hight 100.0 mm Weight 4.5 kg, with rotattionssymmetrical, deep, wide distributed light intensity. Cover plastic, opal. Luminous flux 5.456 lm, Power 1 x 44 W, Light colour neutral white, Correlated color temprature (CCT) 4.000 K, Colour rendering index CRI > 80, Housing material: Aluminium / Steel / Plastic, Colour: Silver structure, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP40. With electronic driver, DALI-DT6 dimmable.

| Article data | |
|-------------------|---|
| Article no. | 13710164 |
| GTIN | 4251433943709 |
| Series name | BIRO SQUARE |
| Short description | LED surface luminaire, DALI dimmable |
| Material | Aluminium / Steel / Plastic |
| Colour | Silver |
| Type of surface | Structure |
| Shape | Square |
| Length | 600 mm |
| Width | 600 mm |
| Hight | 100 mm |
| Scope of delivery | Incl. converter for connection to the 230-V mains voltage |
| Weight | 4.500 kg |
| Conformance | CE, UKCA |

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 10.10.2024 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/

BIRO SQUARE LED surface luminaire, DALI dimmable

Article no. 13710164

Light. For Generations.

BRUMBERG

| Lighting technology | |
|------------------------------|-----------|
| Colour temperature | 4.000 K |
| Light colour | White |
| Light output | Direct |
| Luminous flux | 5,456 lm |
| System efficiency | 124 lm/W |
| Colour rendering | CRI > 80 |
| Reflector | Without |
| Beam angle | 114° |
| Light sharing | Symmetric |
| Adjustable color temperature | No |

| Operating technology of the luminaire | |
|---------------------------------------|--|
| System output | 44 W |
| Voltage type | AC |
| AC nominal voltage max | 230 V |
| Frequency max | 50 Hz |
| Lamp | LED |
| Lamp holder | Without fitting |
| Protection class | |
| Degree of protection | IP40 |
| Control | DALI-DT6 |
| Bulb change possible | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |

| Mounting technology | |
|-----------------------|------------------|
| Mounting method | Surface mounting |
| Place of installation | Ceiling-mounted |
| Adjustability | Not adjustable |
| Material cover | Plastic, opal |

| Packing data | |
|-------------------------|---|
| Gross weight | 5.2 kg |
| Length of packaging | 630 mm |
| Packaging width | 630 mm |
| Packaging hight | 110 mm |
| Disposal at end of life | This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment. |

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 10.10.2024 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/