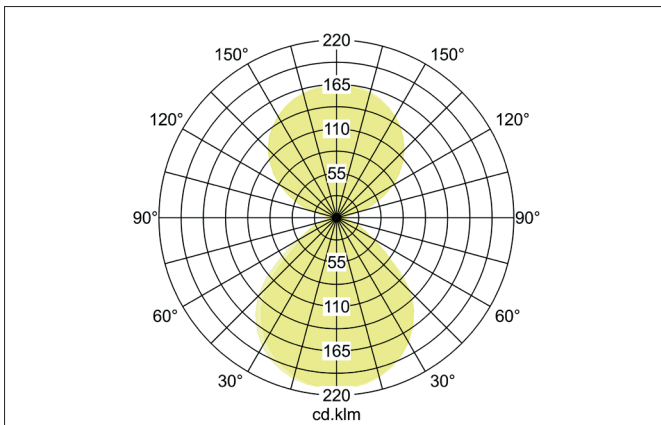
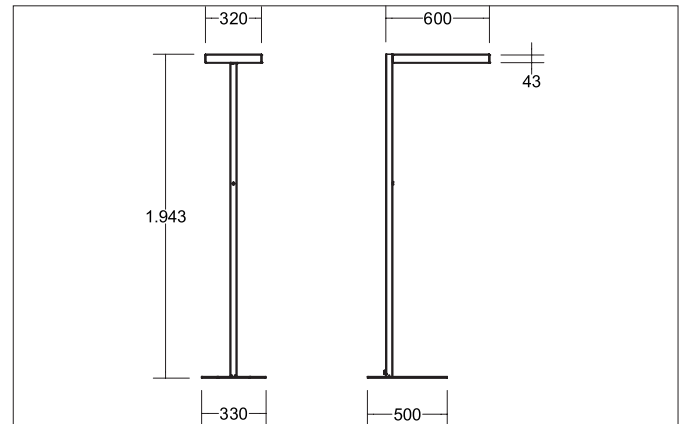
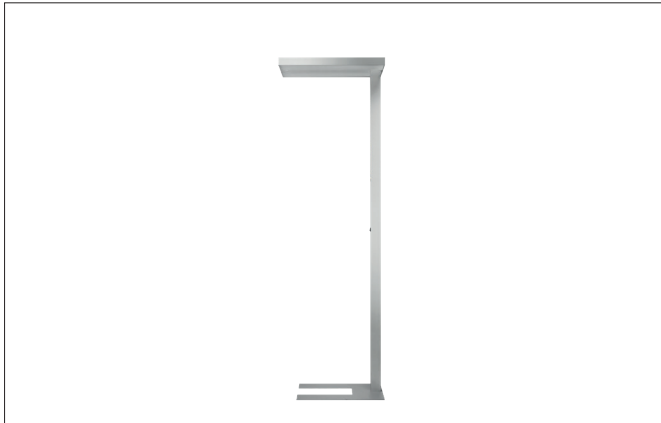


**BIRO LED floor light, with microprismatic cover and indirect light component**

Article no. 77401694

Light.  
For Generations.**Tender**

LED floor light, with microprismatic cover and indirect light component, Square. Luminaire length 600.0 mm, Luminaire width 320.0 mm, Height 1943.0 mm Weight 14.4 kg, with rotationssymmetrical, deep, wide distributed light intensity. optimal light distribution due to a plastic, opal cover. Luminous flux 9.100 lm, Power 1 x 82 W, System Efficiency 111 lm/W, Light colour neutral white, Correlated color temperature (CCT) 4.000 K, Colour rendering index CRI > 80, Rated life time L80/B10 at 25 °C: h, Rated life time L80/B20 at 25 °C: 50.000 h, Housing material: Aluminium / Steel / Plastic, Colour: Silver, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP20, .With electronic driver, Other dimmable.

Article data	
Article no.	77401694
GTIN	4251433917229
Series name	BIRO
Short description	LED floor light, with microprismatic cover and indirect light component
Material	Aluminium / Steel / Plastic
Colour	Silver
Type of surface	Matt
Shape	Square
Length	600 mm
Width	320 mm
Height	1943 mm
Scope of delivery	incl. supply line 2.500 mm with Schuko angle plug
Weight	14.400 kg

**BIRO LED floor light, with microprismatic cover and indirect light component**

Article no. 77401694

Light.  
For Generations.

Lighting technology	
Colour temperature	4.000 K
Light colour	White
Light output	Direct/Indirect
Luminous flux	9,100 lm
System efficiency	111 lm/W
Colour rendering	CRI > 80
Beam angle	80°
Glare evaluation	
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	82 W
Voltage type	AC
AC nominal voltage max	230 V
Frequenz max.	50 Hz
Lamp	LED
Lamp holder	Without fitting
Protection class	I
Degree of protection	IP20
Control	Other, Presence detector, Daylight detector
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Rated life time L80/B20 at 25 °C	50.000 h

Mounting technology	
Mounting method	Surface mounting
Place of installation	Floor-mounted
Adjustability	Not adjustable
stamp	UKCA
Material cover	Plastic, opal

Packing data	
Gross weight	18 kg
Length of packaging	2,040 mm
Packaging width	680 mm
Packaging height	380 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.