

SPIKE LED ground spike spotlight, 24 V DC, IP67 Article no. 60105643



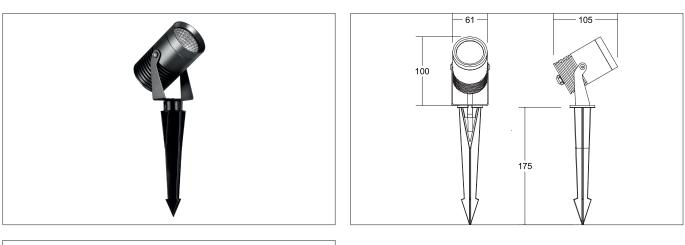



Tender

Round LED ground spike spotlight, 24 V DC, IP67, luminaire diameter 61 mm, height 100 mm, weight 0.542 kg, transparent glass cover, rated luminous flux 1,200 lm, rated wattage 1 x 15 W, light color warm white, most similar color temperature (CCT) 3,000 K, general color rendering index CRI > 80, housing material: aluminum / glass, color: titanium, permissible ambient temperature (ta): -20 °C - +25 °C, protection class (EN 61140): III, degree of protection (DIN EN 60529): IP67, degree of impact resistance according to IEC62262: IK04. For connection to an external control gear, which is not included with the luminaire. Dimmable depending on the control gear.

Article data	
Article no.	60105643
GTIN	4251433925569
Series name	SPIKE
Short description	LED ground spike spotlight, 24 V DC, IP67
Material	Aluminium / Glass
Colour	Titanium
Shape	Round
Outer diameter	61 mm
Width	61 mm
Hight	100 mm
Scope of delivery	Including 1,000 mm connecting cable with Aquastop
Weight	0.542 kg
Conformance	CE, UKCA

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 25.04.2025 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/

Lighting technology

SPIKE LED ground spike spotlight, 24 V DC, IP67

Article no. 60105643

Lighting technology		
Colour temperature	3.000 K	
Light colour	White	
Luminous flux	1,200 lm	
System efficiency	80 lm/W	
Colour rendering	CRI > 80	
Beam angle	38°	
¥	·	
Operating technology of the luminaire		
System output	15 W	
Voltage type	DC	
Lamp	LED	
Lamp holder	Without fitting	
Protection class		
Degree of protection	IP67	
Control	Depending on driver	
	The light source of this luminaire may only be replaced by the manufacturer or a service	
Bulb change possible	technician commissioned by him or a similarly qualified person.	
Energy efficiency class	nicht erforderlich	
	· · · · · · · · · · · · · · · · · · ·	
Mounting technology		
Mounting method	Surface mounting	
Place of installation	Floor-mounted	
Adjustability	Head adjustable	
Swivel angle	90°	
Rotation angle	355°	
Impact resistance	ІКО4	
Material cover	Glass transparent	
Packing data		
Gross weight	0.629 kg	
Length of packaging	205 mm	
Packaging width	110 mm	
Packaging hight	85 mm	
	This product must not be disposed of with household waste. You are obliged, to dispose of	
	such electrical waste separately.	
Disposal at end of life	By disposing of electrical waste and other old or defective electronics separately, you	
	support recycling or other forms of re-use. In that way you help to take care and to avoid that	
	harmful substances get into the environment.	
	· · · · · · · · · · · · · · · · · · ·	
Required accessories		
Article no.: 17206000		
LED power supply 24 V DC, 1-10 V dimmable	(analog)	
Power: 1 - 20 W		
Dimensions: 145 mm x 55 mm x 19 mm		
https://www.brumberg.com/fileadmin/products/Datenblatt_17206000_2021_DE.pdf		
Article no.: 17207000		
LED power supply 24 V DC, on/off switchable		
Power: 1 - 30 W		
Dimensions: 160 mm x 50 mm x 22 mm		
https://www.brumberg.com/fileadmin/products/Datenblatt_17207000_2021_DE.pdf		
	ter, fatterer, in av over and in a spar	

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 25.04.2025 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/