
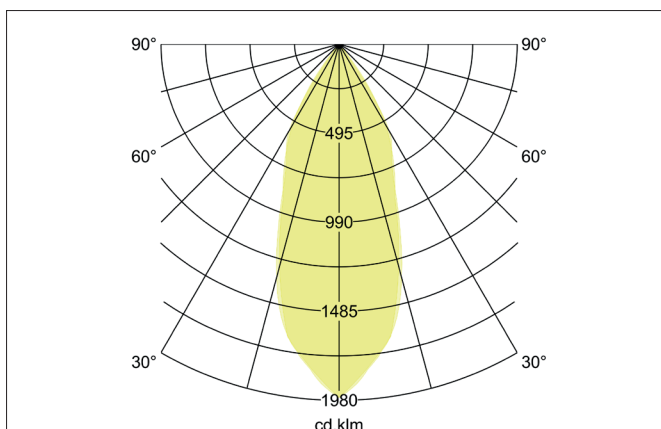
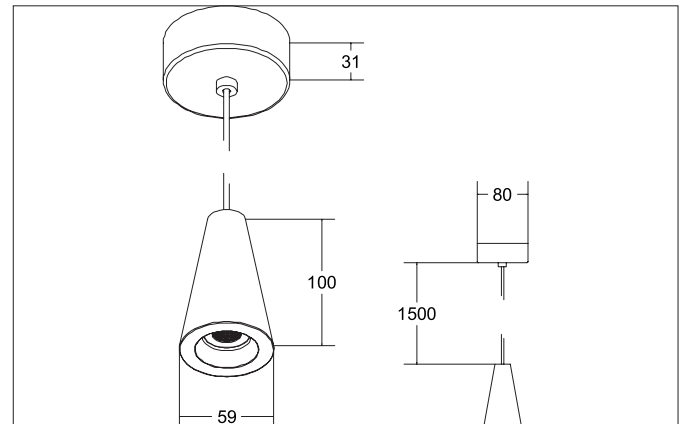


KONKRET LED pendant luminaire

Article no. 12112733


Tender

LED pendant luminaire, Round. Luminaire diameter 59.0 mm, Height 1631.0 mm, for pendulum mounting. Pendulum length max. 1500.0 mm Weight 0.435 kg, Reflector silver with rotationssymmetrical, deep, wide distributed light intensity. Cover glass transparent. Luminous flux 220 lm, Power 1 x 4,5 W, System Efficiency 49 lm/W, Light colour warm white, Correlated color temperature (CCT) 3.000 K, Colour rendering index CRI > 90, Housing material: Concrete / Aluminum / Plastic, Colour: Concrete / structureblack, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP20. With electronic driver, on/off switchable.

Product Benefits

- Slim pendant luminaire with invisible power supply.
- Pendant length 1,500 mm (can be shortened on site).
- Simple and tool-reduced mounting.
- CRI > 90.
- Housing material concrete.

KONKRET LED pendant luminaire

Article no. 12112733

| Article data | |
|-------------------|---|
| Article no. | 12112733 |
| GTIN | 4251433925705 |
| Series name | KONKRET |
| Short description | LED pendant luminaire |
| Material | Concrete / Aluminum / Plastic |
| Colour | Concrete / Structureblack |
| Type of surface | Matt |
| Shape | Round |
| Outer diameter | 59 mm |
| Hight | 1631 mm |
| Scope of delivery | Incl. converter for connection to the 230-V mains voltage, on/off and 1,500 mm pendant suspension |
| Weight | 0.435 kg |
| Conformance | CE, UKCA |

| Lighting technology | |
|------------------------------|------------|
| Colour temperature | 3.000 K |
| Light colour | White |
| Light output | Direct |
| Luminous flux | 220 lm |
| System efficiency | 49 lm/W |
| Colour rendering | CRI > 90 |
| Reflector | High-gloss |
| Reflector colour | silver |
| Beam angle | 38° |
| Light sharing | Symmetric |
| Adjustable color temperature | No |

| Operating technology of the luminaire | |
|---------------------------------------|--|
| System output | 4.5 W |
| Voltage type | AC |
| AC nominal voltage max | 230 V |
| Frequency max | 50 Hz |
| Lamp | LED |
| Lamp holder | Without fitting |
| Protection class | I |
| Degree of protection | IP20 |
| Dimmable | No |
| Wire number | 3 |
| Control | on/off |
| Bulb change possible | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |

| Mounting technology | |
|-----------------------------|-------------------|
| Mounting method | Suspended |
| Place of installation | Ceiling-mounted |
| Adjustability | Not adjustable |
| Pendulum length min. | 10 mm |
| Pendulum length max. | 1,500 mm |
| Material cover | Glass transparent |
| Suitable for through-wiring | No |

KONKRET LED pendant luminaire
Article no. 12112733

| Packing data | |
|-------------------------|--|
| Gross weight | 0.584 kg |
| Length of packaging | 170 mm |
| Packaging width | 170 mm |
| Packaging hight | 120 mm |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |