
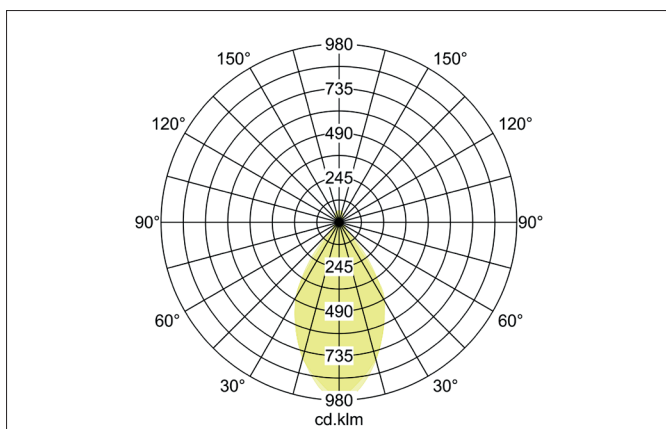
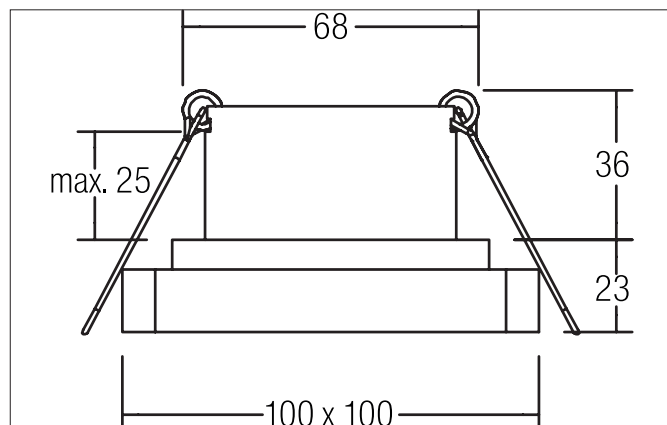



**QUBIC LED recessed downlight, with indirect light component**

Article no. 12227173


**Tender**

LED recessed downlight, with indirect component, white structure, square. Designed in a compact design for tool-free quick installation in the ceiling. LED recessed ceiling downlight with indirect light component.

Direct luminous flux 660 lm (9 W), indirect luminous flux 140 lm (2 W). Version: Plug&Play, Mounting type: Recessed mounting, Mounting location: Ceiling mounting, Material: Aluminum / polycarbonate, Protection rating on room side: to DIN EN 60529: IP20, Protection class: (EN 61140) III, Power: 11 W, Luminous flux: 800 lm, Colour temperature: 3,000 K, Beam angle: 57°, Adjustability: Non-adjustable, without control gear, Dimmable: Dependent on control gear, Type of dimming: Dependent on control gear.

**Product Benefits**

- Quadratisches Einbaudownlight aus massivem Aluminium mit Indirektanteil.
- Einfache und werkzeuglose Montage.
- CRI > 80.
- Dimmbar bei Verwendung entsprechender Konverter.
- Geringe Einbautiefe 36 mm - Länge 100 mm x Breite 100 mm, Deckenausschnitt 68 mm.
- Deckenstärke maximal 25 mm.
- Teil der Produktfamilie QUBIC.
- Erhältlich in weiss struktur und schwarz struktur.


**QUBIC LED recessed downlight, with indirect light component**

Article no. 12227173

Article data	
Article no.	12227173
GTIN	4251433915362
Series name	QUBIC
Short description	LED recessed downlight, with indirect light component
Material	Aluminium / Polycarbonate
Colour	white structure
Type of surface	Structure
Shape	Square
Length	100 mm
Width	100 mm
Built-in diameter	68 mm
Installation depth	36 mm
Hight	23 mm
Weight	0.395 kg
Conformance	CE, UKCA

Lighting technology	
Colour temperature	3.000 K
Light colour	white
Light output	Direct/Indirect
Luminous flux	800 lm
Colour rendering	CRI > 90
Reflector	Faceted
Reflector colour	silver
Beam angle	57°
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
Voltage type	DC
Current	350 mA
Lamp	LED
Lamp holder	Plug&Play
Protection class	III
Degree of protection	IP20
Dimmable	Depending on type of control gear
Control	Depending on driver
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Rated life time L70/B50 at 25 °C	50,000 h
Energy efficiency class	nicht erforderlich

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Max. ceiling thickness	25 mm
Further references	No cover with thermal insulation material
Material cover	Polycarbonat clear
Suitable for through-wiring	Yes, with optional accessories



**QUBIC LED recessed downlight, with indirect light component**  
Article no. 12227173

Packing data	
Gross weight	0.463 kg
Length of packaging	150 mm
Packaging width	130 mm
Packaging hight	70 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>


**QUBIC LED recessed downlight, with indirect light component**

Article no. 12227173

**Required accessories**

Article no.: 17613000

LED converter 350 mA, on/off switchable

Power: 1 - 15 W, Plug&amp;Play

Dimensions: 115 mm x 34 mm x 19 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17613000\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf)

Article no.: 17613020

LED converter 350 mA, on/off switchable

Power: 1 - 15 W, Plug&amp;Play + Anschlussbox

Dimensions: 115 mm x 34 mm x 19 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17613020\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf)

Article no.: 17621000

LED converter 350 mA, on/off switchable

Power: 1 - 21 W, Plug&amp;Play

Dimensions: 128 mm x 50 mm x 13 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17621000\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf)

Article no.: 17621020

LED converter 350 mA, on/off switchable

Power: 1 - 21 W, Plug&amp;Play + Anschlussbox

Dimensions: 128 mm x 50 mm x 13 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17621020\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf)

Article no.: 17664000

LED converter 350 mA, trailing-edge phase dimmable

Power: 10,2 - 14 W, Plug&amp;Play

Dimensions: 125 mm x 51 mm x 20 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17664000\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17664000_2021_DE.pdf)

Article no.: 17664020

LED converter 350 mA, trailing-edge phase dimmable

Power: 10,2 - 14 W, Plug&amp;Play + Anschlussbox

Dimensions: 125 mm x 51 mm x 20 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17664020\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17664020_2021_DE.pdf)

Article no.: 17643000

LED converter 350 mA, trailing-edge phase dimmable

Power: 8,8 - 18 W, Plug&amp;Play

Dimensions: 110.5 mm x 52 mm x 22 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17643000\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17643000_2021_DE.pdf)

Article no.: 17643020

LED converter 350 mA, trailing-edge phase dimmable

Power: 8,8 - 18 W, Plug&amp;Play + Anschlussbox

Dimensions: 110.5 mm x 52 mm x 22 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17643020\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17643020_2021_DE.pdf)

Article no.: 17648000

LED converter 350 mA, trailing-edge phase dimmable

Power: 0,7 - 17 W, Plug&amp;Play

Dimensions: 166 mm x 46 mm x 34 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17648000\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17648000_2021_DE.pdf)

Article no.: 17648020

LED converter 350 mA, trailing-edge phase dimmable

Power: 0,7 - 17 W, Plug&amp;Play + Anschlussbox

Dimensions: 166 mm x 46 mm x 34 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17648020\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17648020_2021_DE.pdf)


**QUBIC LED recessed downlight, with indirect light component**

Article no. 12227173

**Required accessories**

Article no.: 17657000

LED converter 350 mA, 1-10 V dimmable (analog)

Power: 5,2 - 18 W, Plug&amp;Play

Dimensions: 110 mm x 52 mm x 22 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17657000\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17657000_2021_DE.pdf)

Article no.: 17683000

LED converter 350 mA, DALI dimmable (digital)

Power: 3,5 - 17 W, Plug&amp;Play

Dimensions: 110.5 mm x 52 mm x 22 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17683000\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17683000_2021_DE.pdf)

Article no.: 17683020

LED converter 350 mA, DALI dimmable (digital)

Power: 3,5 - 17 W, Plug&amp;Play + Anschlussbox

Dimensions: 110.5 mm x 52 mm x 22 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17683020\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17683020_2021_DE.pdf)

Article no.: 17671000

LED converter 350mA, ZigBee dimmable

Power: 3,5 - 18,5 W, Plug&amp;Play

Dimensions: 146.5 mm x 44 mm x 30 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17671000\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17671000_2021_DE.pdf)

Article no.: 17671020

LED converter 350mA, ZigBee dimmable

Power: 3,5 - 18,5 W, Plug&amp;Play + Anschlussbox

Dimensions: 146.5 mm x 44 mm x 30 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17671020\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf)

Article no.: 17672000

LED converter 350mA, Casambi dimmable

Power: 3,5 - 18,5 W, Plug&amp;Play

Dimensions: 146.5 mm x 44 mm x 30 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17672000\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf)

Article no.: 17672020

LED converter 350mA, Casambi dimmable

Power: 3,5 - 18,5 W, Plug&amp;Play + Anschlussbox

Dimensions: 146.5 mm x 44 mm x 30 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17672020\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17672020_2021_DE.pdf)
**Optional accessories**

Article no.: 3835

Plug &amp; Play extension lead 350 mA

Dimensions: 500 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_00003835\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_00003835_2021_DE.pdf)

Article no.: 3836

Plug &amp; Play extension lead 350 mA

Dimensions: 1,000 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_00003836\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_00003836_2021_DE.pdf)

Article no.: 3837

Plug &amp; Play extension lead 350 mA

Dimensions: 2,000 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_00003837\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_00003837_2021_DE.pdf)