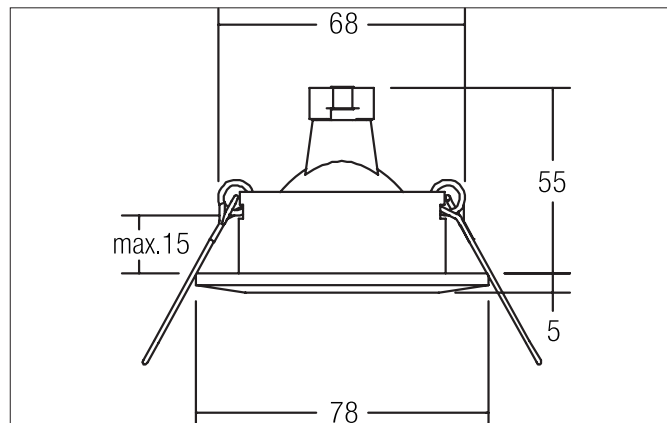


VELEK Recessed downlight, GX5,3

Article no. 2117.03


Tender

Recessed downlight, GX5.3, matt chrome, round. Designed in a compact design for tool-free quick installation for recessed ceiling mounting. Version: GX5.3, Mounting type: Recessed mounting, Mounting location: Ceiling mounting, Material: Cast aluminum, Protection rating on room side: to DIN EN 60529: IP20, Protection class: (EN 61140) III, Voltage: 12 V, Power: 13 W, Number of bulbs / sockets: 1 piece, Adjustability: Non-adjustable, without control gear, Dimmable: Dependent on control gear, Type of dimming: Dependent on control gear.

Product Benefits

- Round recessed downlight made of cast aluminum.
- For LED retrofit lamp GX5.3.
- Easy and tool-free installation.
- Dimmable when using appropriate accessories.
- Diameter 80 mm, ceiling cutout 60 mm, installation depth 55 mm, ceiling thickness max. 25 mm.
- Available in chrome, chrome matt and white color finishes

VELEK Recessed downlight, GX5,3

Article no. 2117.03

| Article data | |
|--------------------|---------------------------|
| Article no. | 2117.03 |
| GTIN | 4250047709008 |
| Series name | VELEK |
| Short description | Recessed downlight, GX5,3 |
| Material | Cast aluminium |
| Colour | Chrome |
| Type of surface | Matt |
| Shape | Round |
| Outer diameter | 78 mm |
| Built-in diameter | 68 mm |
| Installation depth | 55 mm |
| Hight | 5 mm |
| Weight | 0.064 kg |
| Conformance | CE, UKCA |

| Operating technology of the luminaire | |
|---------------------------------------|-----------------------------------|
| System output | 13 W |
| Voltage type | AC/DC |
| AC nominal voltage max | 12 V |
| Frequency max | 50 Hz |
| Lamp | For LED-retrofill lamp |
| Lamp holder | GX5.3 |
| Protection class | III |
| Degree of protection | IP20 |
| Dimmable | Depending on type of control gear |
| Control | Depending on driver |
| Bulb change possible | Yes |

| Mounting technology | |
|------------------------|---|
| Mounting method | Recessed mounting |
| Place of installation | Ceiling-mounted |
| Adjustability | Not adjustable |
| Max. ceiling thickness | 15 mm |
| Further references | No mounting box No cover with thermal insulation material |
| Material cover | Without cover |
| Circlip | With circlip |

| Packing data | |
|-------------------------|--|
| Gross weight | 0.083 kg |
| Length of packaging | 85 mm |
| Packaging width | 35 mm |
| Packaging hight | 84 mm |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |

| Compatible LED-modu- | | | | | | | |
|----------------------|--|--|--|--|--|--|--|
| | | | | | | | |

VELEK Recessed downlight, GX5,3
Article no. 2117.03

Optional accessories

Article no.: 5366

Bracket with socket GX5,3, with strain relief

https://www.brumberg.com/fileadmin/products/Datenblatt_00536600_2021_DE.pdf

Article no.: 5358

Bracket with socket GZ10, with strain relief

https://www.brumberg.com/fileadmin/products/Datenblatt_00535800_2021_DE.pdf