




**COVER-UP-S Recessed downlight, IP44**  
Article no. 4532 1070

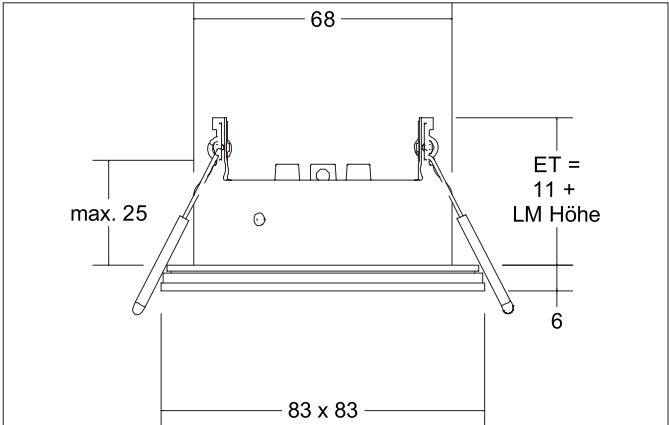

| Tender                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Recessed downlight, IP44, without LED module, white, square. Designed in a compact design for tool-free quick installation for recessed ceiling mounting. All Brumberg MR16 LED modules can be used for the COVER-UP recessed unit. The installation depth of the luminaire depends on the LED module used (here: 11 mm, plus height of the LED module). The LED module is not included in the scope of delivery of the installation unit. Version: without socket, Mounting type: recessed mounting, Mounting location: ceiling mounting, Material: aluminum / steel / glass, Protection rating on room side: to DIN EN 60529: IP44, Protection class: (EN 61 140) III, Power: 13 W, Number of light sources / sockets: 1 piece, Adjustability: non-adjustable, without control gear, Type of dimming: Dependent on control gear. |  |

| Article data      |                                                         |
|-------------------|---------------------------------------------------------|
| Article no.       | 4532 1070                                               |
| GTIN              | 425 143393274 1                                         |
| Series name       | COVER-UP-S                                              |
| Short description | Recessed downlight, IP44                                |
| Material          | Aluminium / Steel / Glass                               |
| Colour            | white                                                   |
| Type of surface   | Glossy                                                  |
| Shape             | Square                                                  |
| Length            | 83 mm                                                   |
| Width             | 83 mm                                                   |
| Built-in diameter | 68 mm                                                   |
| Hight             | 6 mm                                                    |
| Scope of delivery | inkl. rückseitiger LED-Modul-Aufnahme und Dekoglas klar |
| Weight            | 0.156 kg                                                |
| Conformance       | CE, UKCA                                                |


**COVER-UP-S Recessed downlight, IP44**

Article no. 4532 1070

| Lighting technology          |           |
|------------------------------|-----------|
| Light output                 | Direct    |
| Light sharing                | Symmetric |
| Adjustable color temperature | No        |

| Operating technology of the luminaire |                     |
|---------------------------------------|---------------------|
| System output                         | 13 W                |
| Voltage type                          | DC                  |
| Lamp                                  | For LED             |
| Lamp holder                           | Without fitting     |
| Protection class                      | III                 |
| Protection class on the ceiling side  | IP20                |
| Degree of protection                  | IP44                |
| Control                               | Depending on driver |
| Bulb change possible                  | Yes                 |
| Energy efficiency class               | nicht erforderlich  |

| Mounting technology    |                                                     |
|------------------------|-----------------------------------------------------|
| Mounting method        | Recessed mounting                                   |
| Place of installation  | Ceiling-mounted                                     |
| Adjustability          | Not adjustable                                      |
| Max. ceiling thickness | 25 mm                                               |
| Further references     | No cover with thermal insulation material Smarthome |
| Material cover         | Glass transparent                                   |
| Circlip                | Without circlip                                     |

| Packing data            |                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gross weight            | 0.175 kg                                                                                                                                                                                                                                                                                                                                                                       |
| Length of packaging     | 100 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Packaging width         | 55 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Packaging height        | 100 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |


**COVER-UP-S Recessed downlight, IP44**

Article no. 45321070

| Compatible LED-modu- |        |            |                                |                       |                  |         |                 |
|----------------------|--------|------------|--------------------------------|-----------------------|------------------|---------|-----------------|
| Article no.          | Power  | Beam angle | Colour tempera-<br>ture        | Colour rende-<br>ring | Luminous<br>flux | Input   | Hight LED-Modul |
| 12925003             | 3 W    | 38°        | 2.700 K                        | CRI > 80              | 290 lm           | 350 mA  | 40 mm           |
| 12926003             | 3 W    | 38°        | 3.000 K                        | CRI > 80              | 310 lm           | 350 mA  | 40 mm           |
| 12925004             | 3 W    | 38°        | 4.000 K                        | CRI > 80              | 340 lm           | 350 mA  | 40 mm           |
| 12923383             | 6 W    | 38°        | 2.700 K                        | CRI > 80              | 740 lm           | 350 mA  | 32 mm           |
| 12923603             | 6 W    | 60°        | 2.700 K                        | CRI > 80              | 720 lm           | 350 mA  | 32 mm           |
| 12927383             | 6 W    | 38°        | 2.700 K                        | CRI > 90              | 600 lm           | 350 mA  | 32 mm           |
| 12924383             | 6 W    | 38°        | 3.000 K                        | CRI > 80              | 730 lm           | 350 mA  | 32 mm           |
| 12924603             | 6 W    | 60°        | 3.000 K                        | CRI > 80              | 770 lm           | 350 mA  | 32 mm           |
| 12928383             | 6 W    | 38°        | 3.000 K                        | CRI > 90              | 680 lm           | 350 mA  | 32 mm           |
| 12924384             | 6 W    | 38°        | 3.500 K                        | CRI > 80              | 730 lm           | 350 mA  | 32 mm           |
| 12924604             | 6 W    | 60°        | 3.500 K                        | CRI > 80              | 770 lm           | 350 mA  | 32 mm           |
| 12928384             | 6 W    | 38°        | 3.500 K                        | CRI > 90              | 680 lm           | 350 mA  | 32 mm           |
| 12923384             | 6 W    | 38°        | 4.000 K                        | CRI > 80              | 770 lm           | 350 mA  | 32 mm           |
| 12923604             | 6 W    | 60°        | 4.000 K                        | CRI > 80              | 790 lm           | 350 mA  | 32 mm           |
| 12927384             | 6 W    | 38°        | 4.000 K                        | CRI > 90              | 720 lm           | 350 mA  | 32 mm           |
| 12920183             | 6 W    | 18°        | 3.000 K                        | CRI > 80              | 740 lm           | 350 mA  | 31 mm           |
| 12920243             | 6 W    | 24°        | 3.000 K                        | CRI > 80              | 760 lm           | 350 mA  | 31 mm           |
| 12920003             | 6 W    | 38°        | 3.000 K                        | CRI > 80              | 780 lm           | 350 mA  | 31 mm           |
| 12920603             | 6 W    | 60°        | 3.000 K                        | CRI > 80              | 760 lm           | 350 mA  | 31 mm           |
| 12920184             | 6 W    | 18°        | 4.000 K                        | CRI > 80              | 780 lm           | 350 mA  | 31 mm           |
| 12920244             | 6 W    | 24°        | 4.000 K                        | CRI > 80              | 790 lm           | 350 mA  | 31 mm           |
| 12920004             | 6 W    | 38°        | 4.000 K                        | CRI > 80              | 810 lm           | 350 mA  | 31 mm           |
| 12920604             | 6 W    | 60°        | 4.000 K                        | CRI > 80              | 780 lm           | 350 mA  | 31 mm           |
| 12963383             | 6 W    | 38°        | 3.000 K - 1.800 K              | CRI > 90              | 460 lm           | 350 mA  | 32 mm           |
| 12963603             | 6 W    | 60°        | 3.000 K - 1.800 K              | CRI > 90              | 460 lm           | 350 mA  | 32 mm           |
| 12953003             | 12 W   | 38°        | 2.700 K                        | CRI > 80              | 1,130 lm         | 350 mA  | 70 mm           |
| 12954003             | 12 W   | 38°        | 3.000 K                        | CRI > 80              | 1,360 lm         | 350 mA  | 70 mm           |
| 12954004             | 12 W   | 38°        | 3.500 K                        | CRI > 80              | 1,290 lm         | 350 mA  | 70 mm           |
| 12953004             | 12 W   | 38°        | 4.000 K                        | CRI > 80              | 1,300 lm         | 350 mA  | 70 mm           |
| 12965003             | 12 W   | 38°        | 3.000 K - 1.800 K              | CRI > 90              | 930 lm           | 350 mA  | 70 mm           |
| 12983003             | 12.5 W | 38°        | 3.000 K                        | CRI > 97              | 920 lm           | 350 mA  | 95 mm           |
| 12823003             | 8 W    | 60°        | 2.850 K                        | CRI > 90              | 900 lm           | 24.00 V | 50 mm           |
| 12843004             | 8 W    | 60°        | 2.000 K - 6.500 K              | CRI > 90              | 640 lm           | 24.00 V | 50 mm           |
| 18438002             | 8 W    | 60°        | RGB+WW                         | CRI > 90              | 400 lm           | 24.00 V | 50 mm           |
| 12929503             | 6.3 W  | 50°        | 2.700 K / 3.000 K<br>/ 4.000 K | CRI > 80              | 971 lm           | 350 mA  | 34 mm           |