


CONTROL UNIT 1V0002

FOR CONTROLLER/EXTENDER APPLICATIONS & reev Dashboard Basic

The external control unit is specially designed for use in group solutions based on the Controller/Extender principle, which are invoiced via the reev Dashboard. The included 24-month reev Dashboard Basic enables future-proof operation, regular software updates, as well as flexible user and RFID management. The 1V0002 has been designed for installation in a suitable power distribution box or a switchboard cabinet and replaces the controller wallbox for configuring and controlling up to 16 extender wallboxes eMH2 or eMH3. Integrated load management intelligently distributes the total charging current available from the domestic power installation to all charge points in the system. Its Dashboard communication via an integrated LTE module and OCPP makes the 1V0002 external control unit particularly suitable for use in semi-public and public applications.

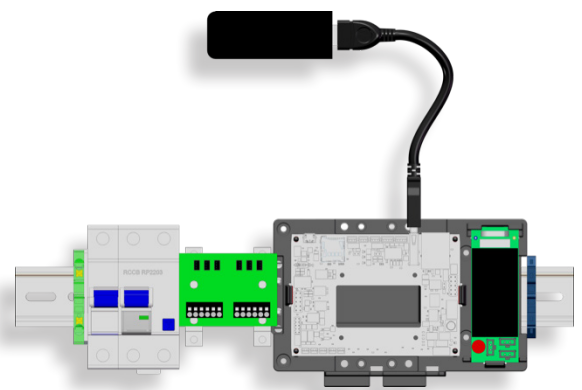

General information

Model	External control unit
Product number	1V0002B
EAN number	4011721181561
Commodity code	85371091
Packaging unit (PU)	1 unit
Packaging (dimensions HxWxD)	150 x 345 x 150 mm
Items supplied	Control unit, installation kit

Input/mains supply

External power supply	for supply cable sizes up to 2 x 50 mm ² (RCCB) and 1 x 4 mm ² (PE)
Rated voltage	230 V
Rated current	0,2 A (40 A inrush current)
Rated frequency	50 Hz
Upstream fuse	not required
Terminal blocks	Direct connection to RCD PE to terminal block

Protection/integrated components

RCCB	Type A RCD, 30 mA
MCB	B characteristic, 6 A, 1+N

Charge monitoring

Backend communication	LAN, LTE, OCPP 1.6
-----------------------	--------------------

Software/Backend

Access control	Driver and vehicle access rights allocated via RFID cards
Software updates	Automatic and free software updates

Operating conditions

Operating temperature	-30 to 40°C
Storage temperature	-30 to 85°C
Relative humidity	5 to 95%, no condensation
Class of protection	I
Overvoltage category	III
Degree of pollution	3
IP rating	acc. to installation enclosure, at least IP44
Maximum elevation	≤ 2,000 m AMSL
Power dissipation	4.5 W

Standards/guidelines

IEC 61439-1

Construction

Type	Electronic modules premounted on DIN rail
Assembly	Installation in suitable distribution enclosure or switch cabinet
Dimensions (HxWxD)	99 x 330 x 78.5 mm
Weight (net)	approx. 0.7 kg
Weight (gross)	approx. 0.9 kg


Optional accessories

Configuration kit

CONF CAB

see website at www.ablmobility.de

Dimensioned drawing

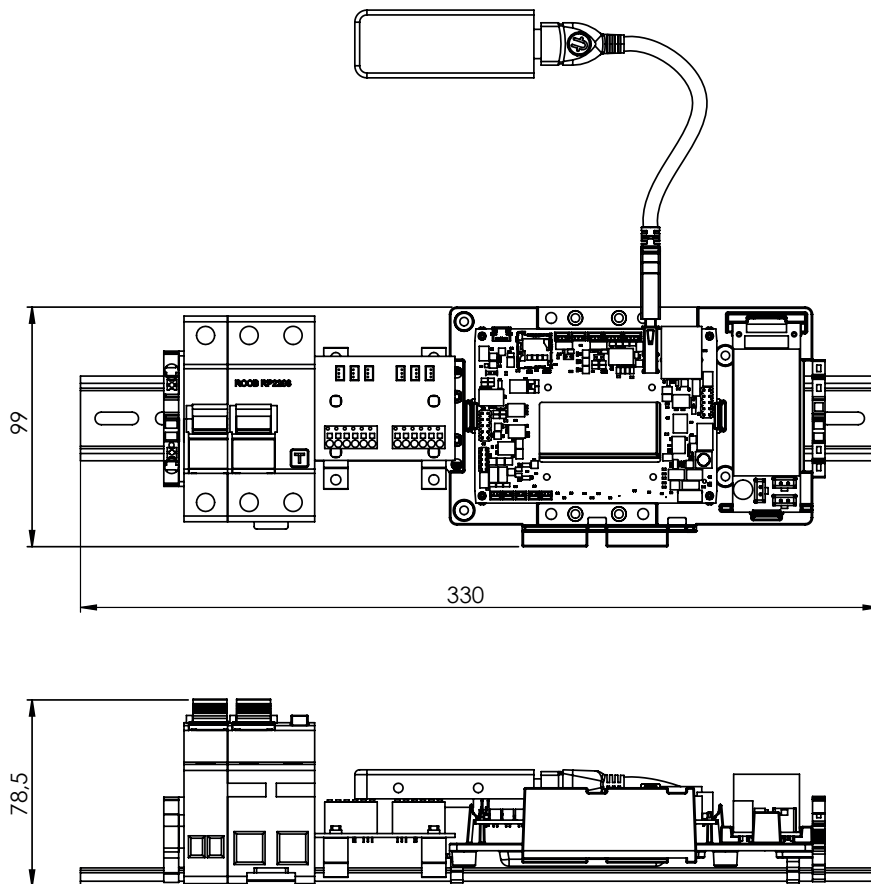

Subject to change: All performance characteristics, technical and other specifications are subject to change without prior notice.

ABL SURSUM
Bayerische Elektrozubehör GmbH & Co. KG

Albert-Büttner-Straße 11
D-91207 Lauf / Pegnitz

Phone +49 (0) 9123 188-0
Fax +49 (0) 9123 188-188

info@abl.de
www.ablmobility.de

reev
by emonvia GmbH

Theo-Prosel-Weg
D-80797 München

Phone +49 (0) 89 215 389 70

sales@reev.com
www.reev.com