
KACIE MAXI LED Surface-mounted downlight, DALI dimmable

Article no. 12597184DA



Light. For Generations.



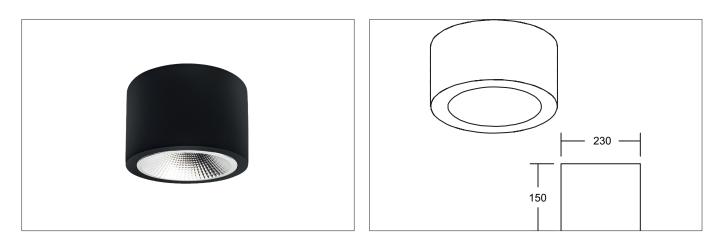

Tender

LED Surface-mounted downlight, DALI dimmable, Round.Luminaire diameter 230.0 mm, Hight 150.0 mm Weight 2.868 kg,Reflector silver with rotattionssymmetrical, deep, wide distributed light intensity.. Luminous flux 4.665 lm, UGR < 21, Power 1 x 48 W, Light colour neutral white, Correlated color temprature (CCT) 4.000 K, Colour rendering index CRI > 90, Rated life time L70/B10 at 25 °C: 50.000 h, Rated life time L70/B50 at 25 °C: 50.000 h, Housing material: Aluminium / Plastic, Colour: Black structure, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP20. With electronic driver, DALI-2 dimmable.

Product Benefits

- Round surface-mounted downlight made of solid aluminum with generously dimensioned heat management.
- High-quality reflector.
- Simple installation.
- CRI > 90, UGR < 21.
- Available in switchable and DALI dimmable versions.

KACIE MAXI LED Surface-mounted downlight, DALI dimmable

Article no. 12597184DA

Light.

BRUMBERG

For Generations.

| Article data | |
|-------------------|--|
| Article no. | 12597184DA |
| GTIN | 4251433999744 |
| Series name | KACIE MAXI |
| Short description | LED Surface-mounted downlight, DALI dimmable |
| Material | Aluminium / Plastic |
| Colour | Black |
| Type of surface | Structure |
| Shape | Round |
| Outer diameter | 230 mm |
| Hight | 150 mm |
| Scope of delivery | incl. converter for connection to 230 V mains voltage, DALI-2 dimmable |
| Weight | 2.868 kg |
| Conformance | CE, UKCA |

| Lighting technology | |
|------------------------------|-----------|
| Colour temperature | 4.000 K |
| Light colour | White |
| Light output | Direct |
| Luminous flux | 4,665 lm |
| System efficiency | 97 lm/W |
| Colour rendering | CRI > 90 |
| Reflector | Faceted |
| Reflector colour | silver |
| Beam angle | 70° |
| Glare evaluation | UGR < 21 |
| Light sharing | Symmetric |
| Adjustable color temperature | No |

| Operating technology of the luminaire | |
|---------------------------------------|--|
| System output | 48 W |
| Voltage type | AC |
| AC nominal voltage max | 230 V |
| Frequency max | 50 Hz |
| Lamp | LED |
| Protection class | I |
| Degree of protection | IP20 |
| Dimmable | Yes |
| Control | DALI-2 |
| Bulb change possible | The light source of this luminaire may only be replaced by the manufacturer or a service |
| | technician commissioned by him or a similarly qualified person. |
| Rated life time L70/B50 at 25 °C | 50,000 h |

| Mounting technology | |
|-----------------------|------------------|
| Mounting method | Surface mounting |
| Place of installation | Ceiling-mounted |
| Adjustability | Not adjustable |
| Material cover | Without cover |

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 07.08.2024 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/

BRUMBERG

KACIE MAXI LED Surface-mounted downlight, DALI dimmable

Article no. 12597184DA

Light. For Generations.

| Packing data | |
|-------------------------|--|
| Gross weight | 3.112 kg |
| Length of packaging | 255 mm |
| Packaging width | 235 mm |
| Packaging hight | 200 mm |
| | This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. |
| Disposal at end of life | By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment. |