
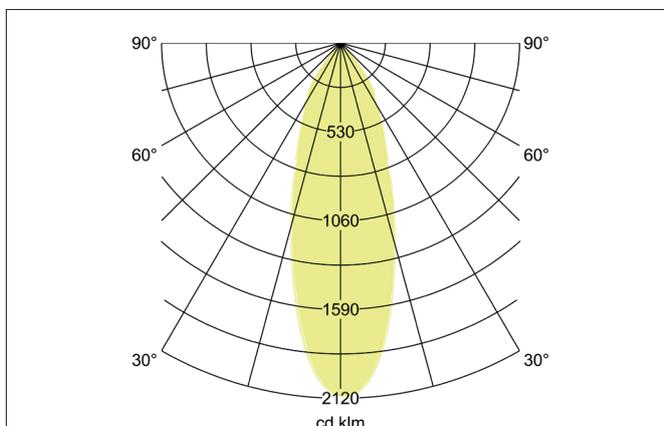
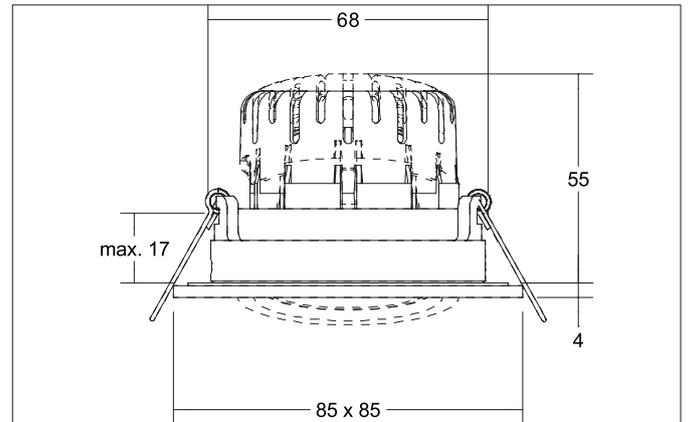


**BB25 LED recessed spotlight set, IP65, trailing edge dimmable  
 (round converter), with connection box**  
 Article no. 40488173AB

**Tender**

Square LED recessed spotlight set, IP65, trailing edge dimmable (round converter), with connection box, tool-free ceiling installation using installation springs. Ceiling cut-out Ø 68 mm, installation depth 55 mm, length 85 mm, width 85 mm, weight 0.233 kg, silver reflector with rotationally symmetrical narrow-wide beam light distribution. Transparent plastic cover, rated luminous flux 620 lm, rated wattage 1 x 7 W, warm white light color, most similar color temperature (CCT) 3,000 K, general color rendering index CRI > 80, service life L70/B50 at 25 °C: 30,000 h, service life L80/B20 at 25 °C: 50,000 h, housing material: aluminum / plastic, color: textured white, permissible ambient temperature (ta): -20 °C - +25 °C, protection class (EN 61140): II, degree of protection (DIN EN 60529): IP65. With electronic control gear, trailing edge dimmable.

**BB25 LED recessed spotlight set, IP65, trailing edge dimmable  
 (round converter), with connection box**

Article no. 40488173AB

Article data	
Article no.	40488173AB
GTIN	4251433997573
Series name	BB25
Short description	LED recessed spotlight set, IP65, trailing edge dimmable (round converter), with connection box
Material	Aluminium / Plastic
Colour	White
Type of surface	Structure
Shape	Square
Built-in diameter	68 mm
Installation depth	55 mm
Length	85 mm
Width	85 mm
Height	4 mm
Scope of delivery	incl. connection box 3-pole, for through-wiring
Weight	0.233 kg
Conformance	CE, UKCA

Lighting technology	
Colour temperature	3.000 K
Light colour	White
Light output	Direct
Luminous flux	620 lm
System efficiency	89 lm/W
Colour rendering	CRI > 80
Reflector	Faceted
Reflector colour	silver
Beam angle	36°
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
Power	6 W
Voltage type	DC
Current	350 mA
Lamp	LED
Protection class	III
Degree of protection	IP65
Rated life time L70/B50 at 25 °C	30,000 h

Operating technology of driver	
Article No. of used driver	17652001
Power min	4.9 W
Power	7 W

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Pivoted
Swivel angle	15°
Max. ceiling thickness	17 mm
Further references	No cover with thermal insulation material
Material cover	Plastic, transparent
Suitable for through-wiring	Yes

**BB25 LED recessed spotlight set, IP65, trailing edge dimmable  
(round converter), with connection box**  
Article no. 40488173AB

Packing data	
Gross weight	0.272 kg
Length of packaging	115 mm
Packaging width	95 mm
Packaging height	80 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>