


DURACELL®

7K67
Size: J (4LR61)

Zn/MnO₂


Alkaline-Manganese Dioxide Battery

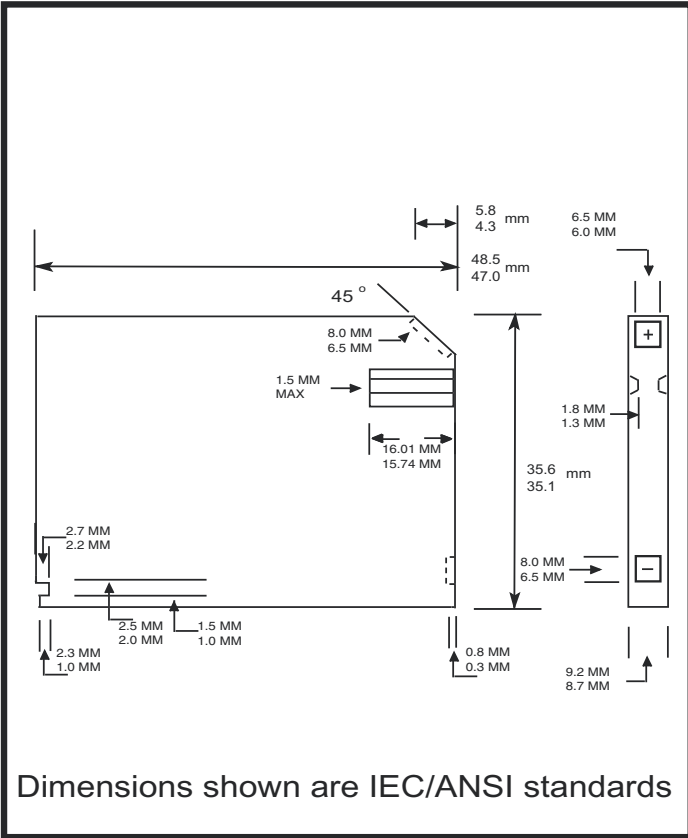

Nominal Voltage:	6 V
Nominal Internal Impedance:	1100 m-ohm @ 1kHz
Average Weight:	30.3 gm (1.1 oz.)
Volume:	15.1 cm ³ (0.92 in. ³)
Terminals:	Flat
Operating Temperature Range:	-20°C to 54°C (-4°F to 130°F)
ANSI:	1412AP
IEC:	4LR61

Dimensions shown are IEC/ANSI standards

Typical Discharge Characteristics at 21°C (70°F)

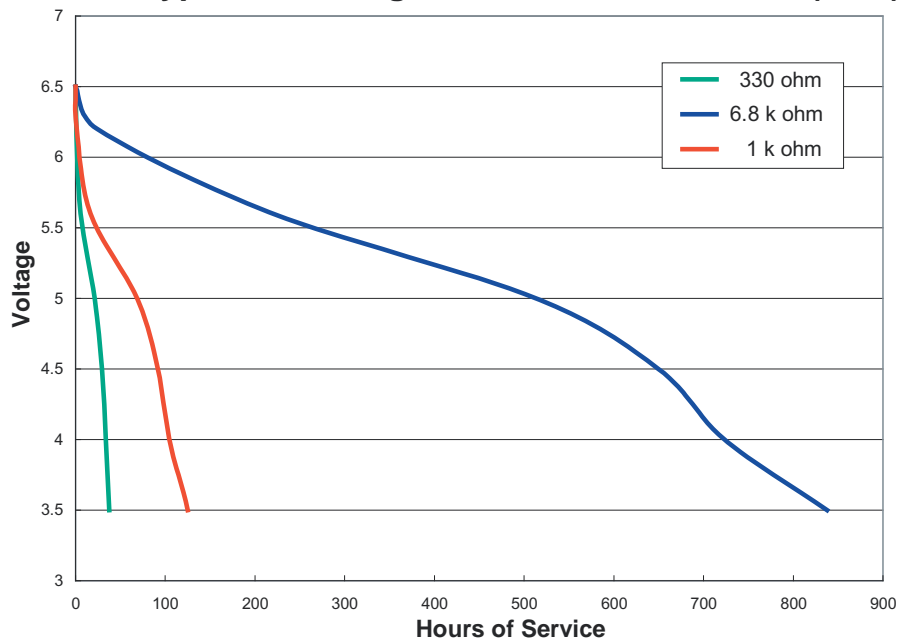

DURACELL®

BATTERIES

Berkshire Corporate Park
Bethel, CT 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
Internet: www.duracell.com

* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.