


# Cell Type KR-CH(2.5)


## Specifications

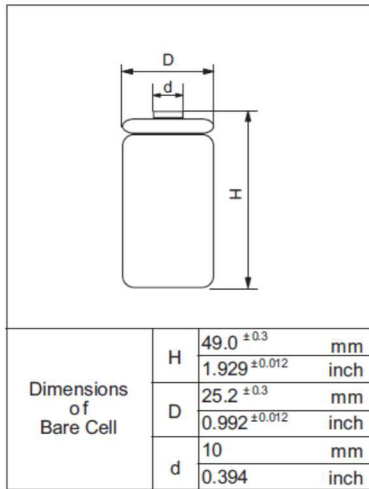


Nominal Capacity		2500mAh
Nominal Voltage		1.2V
Charging Current	Trickle	83mA
	Standard	250mA
Charging Time	Trickle	above 48Hrs.
	Standard	14 to 16Hrs.
Ambient Temperature	Charge	0°C to +70°C [ +32°F to 158°F ]
	Discharge	-20°C to +70°C [ -4°F to 158°F ]
	Storage	-30°C to +70°C [ -22°F to 158°F ]
Internal Impedance (Av.) (at 50% discharge)		6.5mΩ (at 1000Hz)
Weight		75g/ 2.65oz
Dimensions(D)×(H) (with tube)		26.0 <sup>0</sup> <sub>-0.8</sub> × 50.0 <sup>0</sup> <sub>-1.3</sub> mm 1.02 <sup>0</sup> <sub>-0.03</sub> × 1.97 <sup>0</sup> <sub>-0.05</sub> inch

### Typical Characteristics


#### Charge

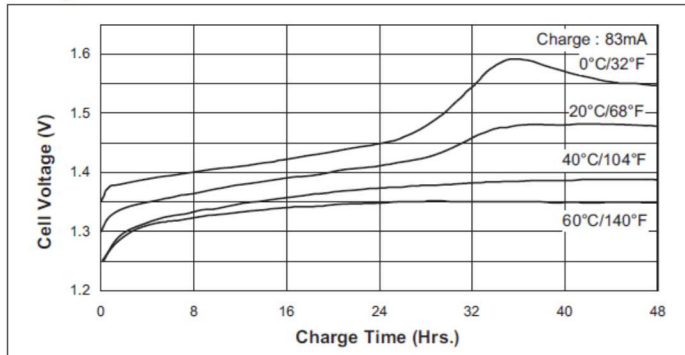


#### Discharge(at high rate)

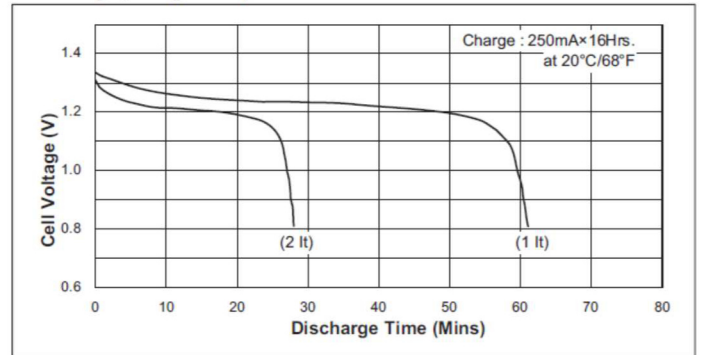


#### Charge

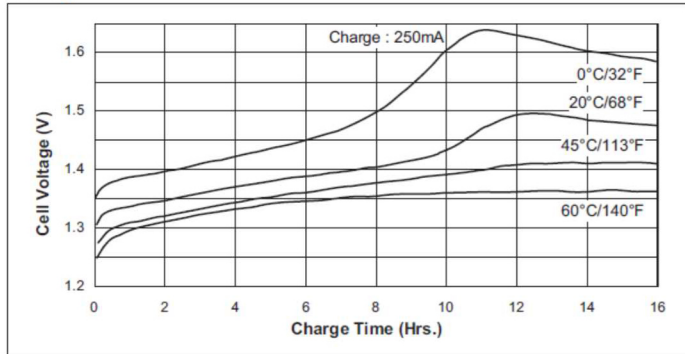

#### Discharge(at high rate)

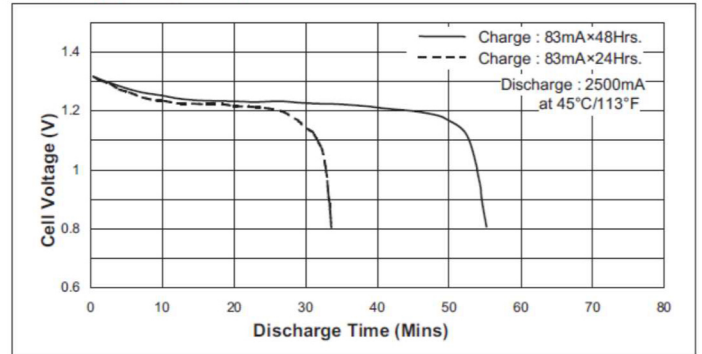

#### Discharge(at low rate)

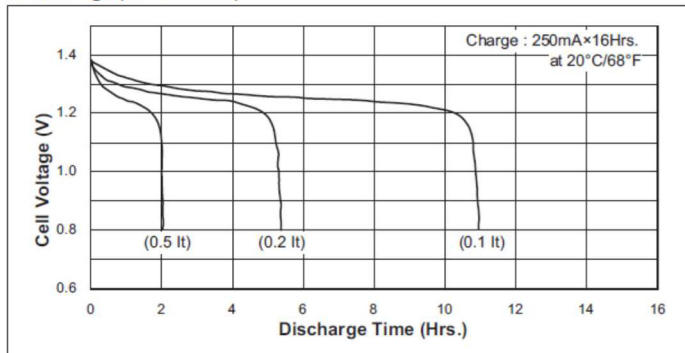

#### Temperature(Charge & Discharge)

