


Product Datasheet

Alkaline

Everyday Power



LR14EPS

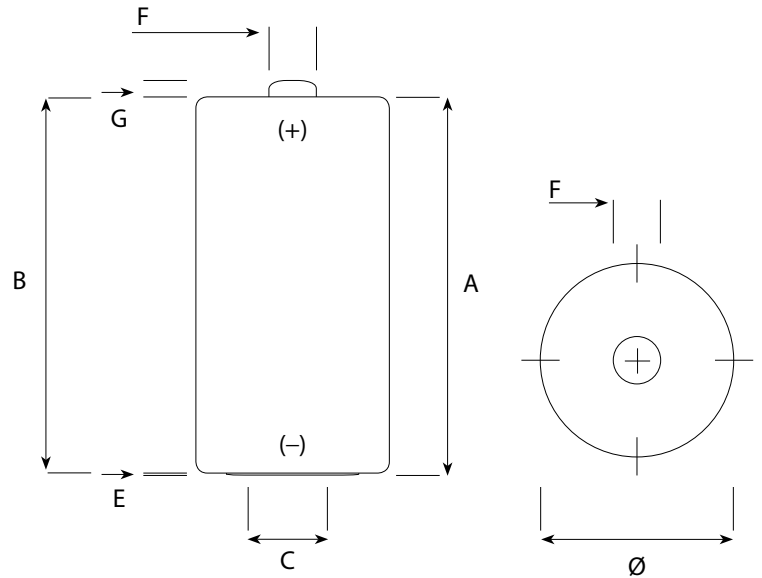

IEC Dimensions (mm)		
Dimension	Maximum	Minimum
A	50,0	—
B	—	48,6
C	—	13,0
E	0,9	—
F	7,5	—
G	—	1,5
Ø	26,2	24,9

Name	LR14 / L / C / AM2 / BABY / MN1400 / 14A / 14AC
Made in	Belgium
Type	Alkaline Foil
Nominal Voltage	1,5 Volt
Electrolyte	Potassium Hydroxide
Average weight	65 g
Storage temp. range	+10°C (50°F) ~ +25°C (77°F)
Operating temp. range	-20°C (-4°F) ~ +55°C (131°F)
Average Impedance	+/- 120 m-Ohm @ 1kHz fresh
Heavy metals	No added mercury (Hg), Cadmium (Cd) or Lead (Pb)
Compliant to	IEC 60086-1, IEC 60086-2, IEC 60086-5 non dangerous goods regulation EU directive 2006/66/EC
Recommended cut off voltage	0,8V per cell (0,9V per cell for multi series usage)

For more information:


www.panasonic-batteries.com

Panasonic


Typical discharge values

LR14EPS

Toy
1h/d 3,9 ohm cutoff 0,8 V

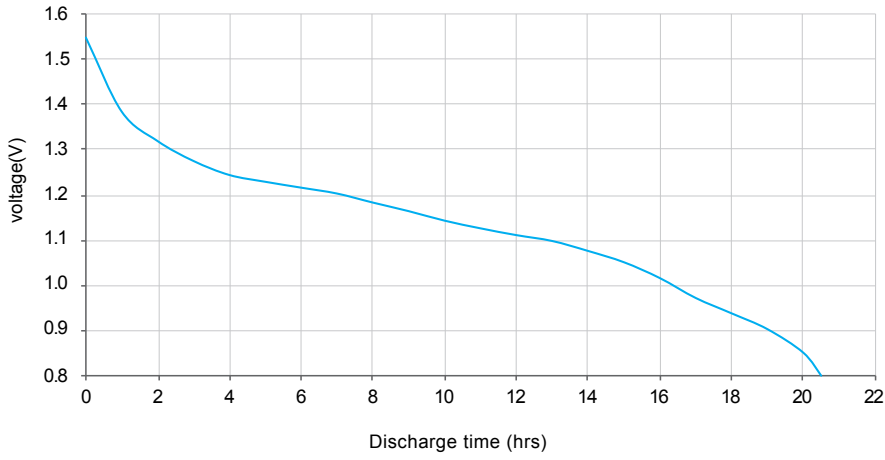

Portable Lighting
4m/15m 8h/d 3,9 ohm cutoff 0,9V

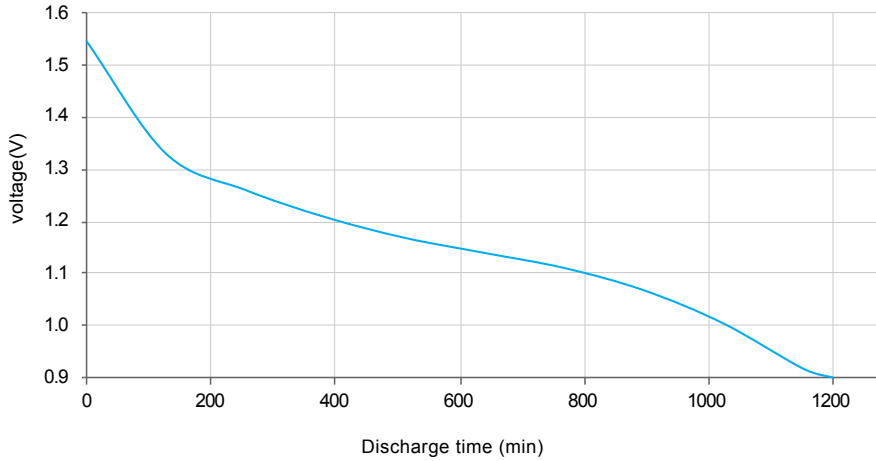

Portable stereo
2h/d 400 mA cutoff 0,9 V

