


Product Datasheet

Alkaline

Everyday Power



6LR61EPS

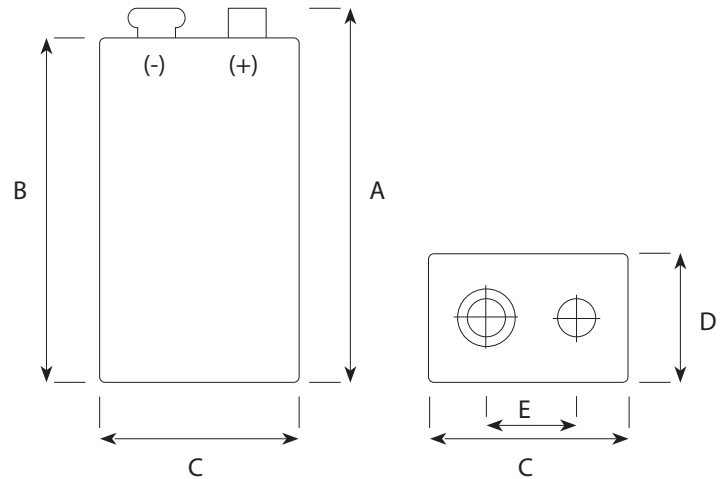

IEC Dimensions (mm)		
Dimension	Maximum	Minimum
A	48,5	46,5
B	46,4	—
C	26,5	24,5
D	17,5	15,5
E	12,95	12,45

Name	9V / 6LR61 / 6AM6 / MN1604 / 1604A / 1604AC
Made in	Belgium
Type	Alkaline Foil
Nominal Voltage	9 Volt
Electrolyte	Potassium Hydroxide
Average weight	43 g
Storage temp. range	+10°C (50°F) ~ +25°C (77°F)
Operating temp. range	-20°C (-4°F) ~ +55°C (131°F)
Average Impedance	+/- 2,3 Ohm @ 1kHz fresh
Heavy metals	No added mercury (Hg), Cadmium (Cd) or Lead (Pb)
Compliant to	IEC 60086-1, IEC 60086-2, IEC 60086-5 non dangerous goods regulation EU directive 2006/66/EC
Recommended cut off voltage	5,4V per battery

For more information:


www.panasonic-batteries.com

Panasonic


Typical discharge values

6LR61EPS

Clock radio
2h/d 620 ohm cutoff 5,4 V

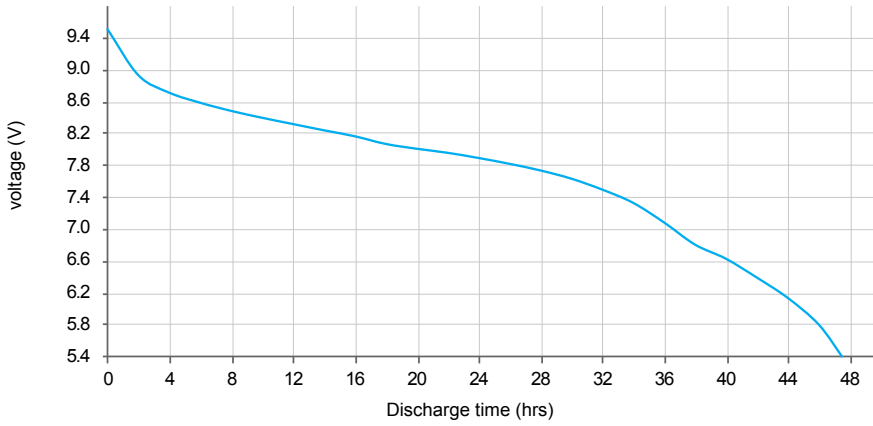

Toy
1h/d 270 ohm cutoff 5,4 V

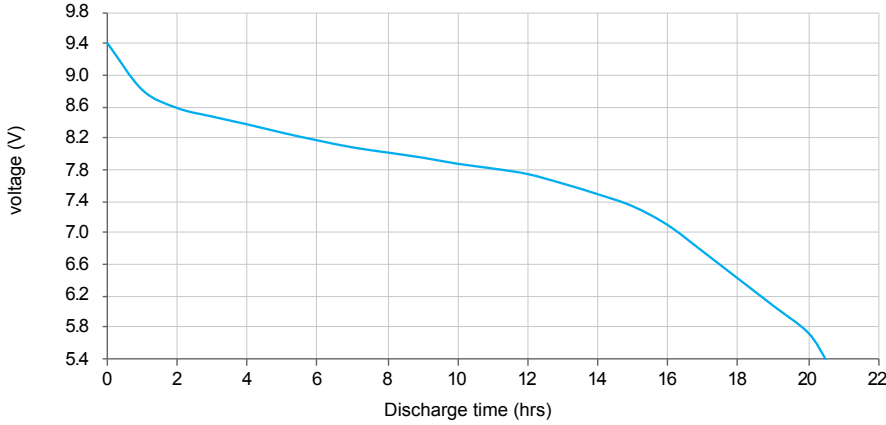

Smoke detector
10 kohm 24h/d + 620 ohm 1s/h cutoff 7,5 V

