




## LOOP®smooth-R Recessed downlight housing, without LED module

Article no. 27066170

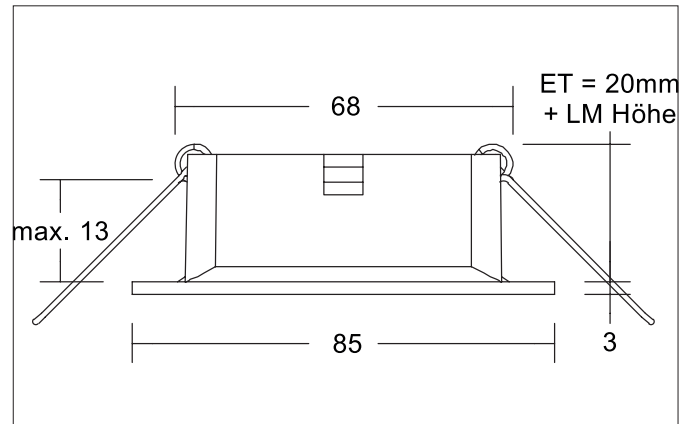

### Tender

Recessed downlight housing, without LED module, white structure, round. Designed in a compact form for tool-free quick installation for recessed ceiling mounting. All Brumberg MR16 LED modules up to 13 W output can be used for the LOOP recessed unit. The installation depth of the luminaire depends on the LED module used (here: 20 mm, plus the height of the LED module). The LED module is not included in the scope of delivery of the installation unit. Version: without socket, Mounting type: recessed mounting, Mounting location: ceiling mounting, Material: nylon / magnesium hydroxide / fiberglass, Protection rating on room side: to DIN EN 60529: IP20, Protection class: (EN 61140) III, Power: 13 W, Adjustability: non-adjustable, without control gear, Dimmable: depending on control gear, Type of dimming: depending on control gear.



## LOOP®smooth-R Recessed downlight housing, without LED module

Article no. 27066170

### Product Benefits

LOOP- Light Of Ocean Plastic.

Zertifiziertes LED-Einbauleuchtengehäuse aus

100 % recycled Ocean Plastic.

Kunststoffabfall im Meer ist eine globale Katastrophe, der wir etwas entgegensetzen müssen.

Einen wichtigen Beitrag leisten wir mit der ersten

Leuchterserie, deren Kunststoffanteil zu 100 Prozent aus „Recycled Ocean Plastic“ besteht.

Wir setzen mit LOOP neue Standards für nachhaltige

Lichtlösungen auf dem globalen Markt, die

Hochwertigkeit, Funktionalität und Ästhetik abbilden.

- Einbaudownlight in runder Bauform aus recycled Ocean Plastic.
- Deckenausschnitt 68 mm, Länge 85 mm, Breite 85 mm.
- Vertieft.
- Wabenraster zur verbesserten Entblendung lieferbar.
- Ohne LED-Modul.
- Bei Verwendung eines geeigneten Konverters dimmbar.

| Article data      |                                                |
|-------------------|------------------------------------------------|
| Article no.       | 27066170                                       |
| GTIN              | 4251433998648                                  |
| Series name       | LOOP®smooth-R                                  |
| Short description | Recessed downlight housing, without LED module |
| Material          | Nylon / Magnesium Hydroxide / Fiberglass       |
| Colour            | white structure                                |
| Type of surface   | Structure                                      |
| Shape             | Round                                          |
| Outer diameter    | 85 mm                                          |
| Built-in diameter | 68 mm                                          |
| Hight             | 3 mm                                           |
| Weight            | 0.048 kg                                       |
| Conformance       | CE, UKCA                                       |

| Operating technology of the luminaire |                                   |
|---------------------------------------|-----------------------------------|
| System output                         | 13 W                              |
| Voltage type                          | DC                                |
| Lamp                                  | For LED                           |
| Lamp holder                           | Without fitting                   |
| Protection class                      | III                               |
| Degree of protection                  | IP20                              |
| Dimmable                              | Depending on type of control gear |
| Control                               | Depending on driver               |
| Energy efficiency class               | nicht erforderlich                |

| Mounting technology         |                                           |
|-----------------------------|-------------------------------------------|
| Mounting method             | Recessed mounting                         |
| Place of installation       | Ceiling-mounted                           |
| Adjustability               | Not adjustable                            |
| Max. ceiling thickness      | 13 mm                                     |
| Further references          | No cover with thermal insulation material |
| Material cover              | Without cover                             |
| Circlip                     | Without circlip                           |
| Suitable for through-wiring | Yes, with optional accessories            |


**LOOP®smooth-R Recessed downlight housing, without LED module**

Article no. 27066170

| Packing data            |                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gross weight            | 0.091 kg                                                                                                                                                                                                                                                                                                                                                                       |
| Length of packaging     | 107 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Packaging width         | 93 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Packaging height        | 65 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |

| Compatible LED-modu- |        |            |                             |                  |               |         |                  |
|----------------------|--------|------------|-----------------------------|------------------|---------------|---------|------------------|
| Article no.          | Power  | Beam angle | Colour temperature          | Colour rendering | Luminous flux | Input   | Height LED-Modul |
| 12925003             | 3 W    | 38°        | 2.700 K                     | CRI > 80         | 290 lm        | 350 mA  | 40 mm            |
| 12926003             | 3 W    | 38°        | 3.000 K                     | CRI > 80         | 310 lm        | 350 mA  | 40 mm            |
| 12925004             | 3 W    | 38°        | 4.000 K                     | CRI > 80         | 340 lm        | 350 mA  | 40 mm            |
| 12923383             | 6 W    | 38°        | 2.700 K                     | CRI > 80         | 740 lm        | 350 mA  | 32 mm            |
| 12923603             | 6 W    | 60°        | 2.700 K                     | CRI > 80         | 720 lm        | 350 mA  | 32 mm            |
| 12927383             | 6 W    | 38°        | 2.700 K                     | CRI > 90         | 600 lm        | 350 mA  | 32 mm            |
| 12924383             | 6 W    | 38°        | 3.000 K                     | CRI > 80         | 730 lm        | 350 mA  | 32 mm            |
| 12924603             | 6 W    | 60°        | 3.000 K                     | CRI > 80         | 770 lm        | 350 mA  | 32 mm            |
| 12928383             | 6 W    | 38°        | 3.000 K                     | CRI > 90         | 680 lm        | 350 mA  | 32 mm            |
| 12924384             | 6 W    | 38°        | 3.500 K                     | CRI > 80         | 730 lm        | 350 mA  | 32 mm            |
| 12924604             | 6 W    | 60°        | 3.500 K                     | CRI > 80         | 770 lm        | 350 mA  | 32 mm            |
| 12928384             | 6 W    | 38°        | 3.500 K                     | CRI > 90         | 680 lm        | 350 mA  | 32 mm            |
| 12923384             | 6 W    | 38°        | 4.000 K                     | CRI > 80         | 770 lm        | 350 mA  | 32 mm            |
| 12923604             | 6 W    | 60°        | 4.000 K                     | CRI > 80         | 790 lm        | 350 mA  | 32 mm            |
| 12927384             | 6 W    | 38°        | 4.000 K                     | CRI > 90         | 720 lm        | 350 mA  | 32 mm            |
| 12920183             | 6 W    | 18°        | 3.000 K                     | CRI > 80         | 740 lm        | 350 mA  | 31 mm            |
| 12920243             | 6 W    | 24°        | 3.000 K                     | CRI > 80         | 760 lm        | 350 mA  | 31 mm            |
| 12920003             | 6 W    | 38°        | 3.000 K                     | CRI > 80         | 780 lm        | 350 mA  | 31 mm            |
| 12920603             | 6 W    | 60°        | 3.000 K                     | CRI > 80         | 760 lm        | 350 mA  | 31 mm            |
| 12920184             | 6 W    | 18°        | 4.000 K                     | CRI > 80         | 780 lm        | 350 mA  | 31 mm            |
| 12920244             | 6 W    | 24°        | 4.000 K                     | CRI > 80         | 790 lm        | 350 mA  | 31 mm            |
| 12920004             | 6 W    | 38°        | 4.000 K                     | CRI > 80         | 810 lm        | 350 mA  | 31 mm            |
| 12920604             | 6 W    | 60°        | 4.000 K                     | CRI > 80         | 780 lm        | 350 mA  | 31 mm            |
| 12963383             | 6 W    | 38°        | 3.000 K - 1.800 K           | CRI > 90         | 460 lm        | 350 mA  | 32 mm            |
| 12963603             | 6 W    | 60°        | 3.000 K - 1.800 K           | CRI > 90         | 460 lm        | 350 mA  | 32 mm            |
| 12953003             | 12 W   | 38°        | 2.700 K                     | CRI > 80         | 1,130 lm      | 350 mA  | 70 mm            |
| 12954003             | 12 W   | 38°        | 3.000 K                     | CRI > 80         | 1,360 lm      | 350 mA  | 70 mm            |
| 12954004             | 12 W   | 38°        | 3.500 K                     | CRI > 80         | 1,290 lm      | 350 mA  | 70 mm            |
| 12953004             | 12 W   | 38°        | 4.000 K                     | CRI > 80         | 1,300 lm      | 350 mA  | 70 mm            |
| 12965003             | 12 W   | 38°        | 3.000 K - 1.800 K           | CRI > 90         | 930 lm        | 350 mA  | 70 mm            |
| 12983003             | 12.5 W | 38°        | 3.000 K                     | CRI > 97         | 920 lm        | 350 mA  | 95 mm            |
| 12823003             | 8 W    | 60°        | 2.850 K                     | CRI > 90         | 900 lm        | 24.00 V | 50 mm            |
| 12843004             | 8 W    | 60°        | 2.000 K - 6.500 K           | CRI > 90         | 640 lm        | 24.00 V | 50 mm            |
| 18438002             | 8 W    | 60°        | RGB+WW                      | CRI > 90         | 400 lm        | 24.00 V | 50 mm            |
| 12929503             | 6.3 W  | 50°        | 2.700 K / 3.000 K / 4.000 K | CRI > 80         | 971 lm        | 350 mA  | 34 mm            |


**LOOP®smooth-R Recessed downlight housing, without LED module**

Article no. 27066170

| Required accessories                                                                                                                                                                                                                                                                                                                     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Article no.: 17665000<br>LED converter 350 mA, switchable<br>Power: 1 - 3,2 W, Plug&Play<br>Dimensions: 52 mm x 30 mm x 23 mm<br><a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17665000_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17665000_2021_DE.pdf</a>                                   |
| Article no.: 17662000<br>LED converter 350 mA, on/off switchable<br>Power: 1 - 7,2 W, Plug&Play<br>Dimensions: 68 mm x 35 mm x 21 mm<br><a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17662000_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17662000_2021_DE.pdf</a>                            |
| Article no.: 17662020<br>LED converter 350 mA, on/off switchable<br>Power: 1 - 7,2 W, Plug&Play + Anschlussbox<br>Dimensions: 35 mm x 21 mm<br><a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17662020_2021_DE.pdf</a>                     |
| Article no.: 17613000<br>LED converter 350 mA, on/off switchable<br>Power: 1 - 15 W, Plug&Play<br>Dimensions: 115 mm x 34 mm x 19 mm<br><a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17613000_2021_DE.pdf</a>                            |
| Article no.: 17613020<br>LED converter 350 mA, on/off switchable<br>Power: 1 - 15 W, Plug&Play + Anschlussbox<br>Dimensions: 115 mm x 34 mm x 19 mm<br><a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17613020_2021_DE.pdf</a>             |
| Article no.: 17621000<br>LED converter 350 mA, on/off switchable<br>Power: 1 - 21 W, Plug&Play<br>Dimensions: 128 mm x 50 mm x 13 mm<br><a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17621000_2021_DE.pdf</a>                            |
| Article no.: 17621020<br>LED converter 350 mA, on/off switchable<br>Power: 1 - 21 W, Plug&Play + Anschlussbox<br>Dimensions: 128 mm x 50 mm x 13 mm<br><a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17621020_2021_DE.pdf</a>             |
| Article no.: 17663000<br>LED converter 350 mA, trailing-edge phase dimmable<br>Power: 2,8 - 7 W, Plug&Play<br>Dimensions: 110 mm x 50 mm x 19 mm<br><a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17663000_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17663000_2021_DE.pdf</a>                |
| Article no.: 17663020<br>LED converter 350 mA, trailing-edge phase dimmable<br>Power: 2,8 - 7 W, Plug&Play + Anschlussbox<br>Dimensions: 110 mm x 50 mm x 19 mm<br><a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17663020_2021_DE.pdf</a> |
| Article no.: 17664000<br>LED converter 350 mA, trailing-edge phase dimmable<br>Power: 10,2 - 14 W, Plug&Play<br>Dimensions: 125 mm x 51 mm x 20 mm<br><a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17664000_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17664000_2021_DE.pdf</a>              |


**LOOP®smooth-R Recessed downlight housing, without LED module**

Article no. 27066170

| Required accessories                                                                                                                                                                                                                                                                                                                        |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Article no.: 17664020<br>LED converter 350 mA, trailing-edge phase dimmable<br>Power: 10,2 - 14 W, Plug&Play + Anschlussbox<br>Dimensions: 125 mm x 51 mm x 20 mm<br><a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17664020_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17664020_2021_DE.pdf</a>  |
| Article no.: 17652000<br>LED-round converter 350 mA, trailing-edge phase dimmer<br>Power: 4,9 - 7 W, Plug&Play<br>Dimensions: 51 mm x 24 mm<br><a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17652000_2021_DE.pdf</a>                        |
| Article no.: 17652020<br>LED-round converter 350 mA, trailing-edge phase dimmer<br>Power: 4,9 - 7 W, Plug&Play + Anschlussbox<br>Dimensions: 51 mm x 24 mm<br><a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17652020_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17652020_2021_DE.pdf</a>         |
| Article no.: 17640000<br>LED converter 350 mA, trailing-edge phase dimmable<br>Power: 4,2 - 10 W, Plug&Play<br>Dimensions: 102 mm x 38 mm x 21 mm<br><a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17640000_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17640000_2021_DE.pdf</a>                  |
| Article no.: 17640020<br>LED converter 350 mA, trailing-edge phase dimmable<br>Power: 4,2 - 10 W, Plug&Play + Anschlussbox<br>Dimensions: 102 mm x 38 mm x 21 mm<br><a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17640020_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17640020_2021_DE.pdf</a>   |
| Article no.: 17643000<br>LED converter 350 mA, trailing-edge phase dimmable<br>Power: 8,8 - 18 W, Plug&Play<br>Dimensions: 110.5 mm x 52 mm x 22 mm<br><a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17643000_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17643000_2021_DE.pdf</a>                |
| Article no.: 17643020<br>LED converter 350 mA, trailing-edge phase dimmable<br>Power: 8,8 - 18 W, Plug&Play + Anschlussbox<br>Dimensions: 110.5 mm x 52 mm x 22 mm<br><a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17643020_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17643020_2021_DE.pdf</a> |
| Article no.: 17648000<br>LED converter 350 mA, trailing-edge phase dimmable<br>Power: 0,7 - 17 W, Plug&Play<br>Dimensions: 166 mm x 46 mm x 34 mm<br><a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17648000_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17648000_2021_DE.pdf</a>                  |
| Article no.: 17648020<br>LED converter 350 mA, trailing-edge phase dimmable<br>Power: 0,7 - 17 W, Plug&Play + Anschlussbox<br>Dimensions: 166 mm x 46 mm x 34 mm<br><a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17648020_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17648020_2021_DE.pdf</a>   |
| Article no.: 17657000<br>LED converter 350 mA, 1-10 V dimmable (analog)<br>Power: 5,2 - 18 W, Plug&Play<br>Dimensions: 110 mm x 52 mm x 22 mm<br><a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17657000_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17657000_2021_DE.pdf</a>                      |


**LOOP®smooth-R Recessed downlight housing, without LED module**

Article no. 27066170

| Required accessories                                                                                                                                                                                                                                                                                                                       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Article no.: 17684000<br>LED converter 350 mA, DALI dimmable (digital)<br>Power: 2,8 - 7 W, Plug&Play<br>Dimensions: 130 mm x 42 mm x 22 mm<br><a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17684000_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17684000_2021_DE.pdf</a>                       |
| Article no.: 17684020<br>LED converter 350 mA, DALI dimmable (digital)<br>Power: 2,8 - 7 W, Plug&Play + Anschlussbox<br>Dimensions: 130 mm x 42 mm x 22 mm<br><a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17684020_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17684020_2021_DE.pdf</a>        |
| Article no.: 17658000<br>LED round converter 350 mA, DALI dimmable (digital)<br>Power: 2,1 - 9 W, Plug&Play<br>Dimensions: 56 mm x 25 mm<br><a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17658000_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17658000_2021_DE.pdf</a>                          |
| Article no.: 17658020<br>LED round converter 350 mA, DALI dimmable (digital)<br>Power: 2,1 - 9 W, Plug&Play + Anschlussbox<br>Dimensions: 56 mm x 25 mm<br><a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17658020_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17658020_2021_DE.pdf</a>           |
| Article no.: 17683000<br>LED converter 350 mA, DALI dimmable (digital)<br>Power: 3,5 - 17 W, Plug&Play<br>Dimensions: 110.5 mm x 52 mm x 22 mm<br><a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17683000_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17683000_2021_DE.pdf</a>                    |
| Article no.: 17683020<br>LED converter 350 mA, DALI dimmable (digital)<br>Power: 3,5 - 17 W, Plug&Play + Anschlussbox<br>Dimensions: 110.5 mm x 52 mm x 22 mm<br><a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17683020_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17683020_2021_DE.pdf</a>     |
| Article no.: 17682000<br>LED converter 350 mA, DALI dimmable (digital)<br>Power: 1,8 - 18,5 W, Plug&Play<br>Dimensions: 146.5 mm x 43.5 mm x 22 mm<br><a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17682000_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17682000_2021_DE.pdf</a>                |
| Article no.: 17682020<br>LED converter 350 mA, DALI dimmable (digital)<br>Power: 1,8 - 18,5 W, Plug&Play + Anschlussbox<br>Dimensions: 146.5 mm x 43.5 mm x 22 mm<br><a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17682020_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17682020_2021_DE.pdf</a> |
| Article no.: 17671000<br>LED converter 350mA, ZigBee dimmable<br>Power: 3,5 - 18,5 W, Plug&Play<br>Dimensions: 146.5 mm x 44 mm x 30 mm<br><a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17671000_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17671000_2021_DE.pdf</a>                           |
| Article no.: 17671020<br>LED converter 350mA, ZigBee dimmable<br>Power: 3,5 - 18,5 W, Plug&Play + Anschlussbox<br>Dimensions: 146.5 mm x 44 mm x 30 mm<br><a href="https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf">https://www.brumberg.com/fileadmin/products/Datenblatt_17671020_2021_DE.pdf</a>            |


**LOOP®smooth-R Recessed downlight housing, without LED module**

Article no. 27066170

**Required accessories**

Article no.: 17672000

LED converter 350mA, Casambi dimmable

Power: 3,5 - 18,5 W, Plug&amp;Play

Dimensions: 146.5 mm x 44 mm x 30 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17672000\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17672000_2021_DE.pdf)

Article no.: 17672020

LED converter 350mA, Casambi dimmable

Power: 3,5 - 18,5 W, Plug&amp;Play + Anschlussbox

Dimensions: 146.5 mm x 44 mm x 30 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_17672020\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_17672020_2021_DE.pdf)
**Optional accessories**

Article no.: 81066080

Honeycomb diffuser for glare control, diameter 42 mm

Dimensions: 42 mm x 3 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_81066080\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_81066080_2021_DE.pdf)

Article no.: 3835

Plug &amp; Play extension lead 350 mA

Dimensions: 500 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_00003835\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_00003835_2021_DE.pdf)

Article no.: 3836

Plug &amp; Play extension lead 350 mA

Dimensions: 1,000 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_00003836\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_00003836_2021_DE.pdf)

Article no.: 3837

Plug &amp; Play extension lead 350 mA

Dimensions: 2,000 mm

[https://www.brumberg.com/fileadmin/products/Datenblatt\\_00003837\\_2021\\_DE.pdf](https://www.brumberg.com/fileadmin/products/Datenblatt_00003837_2021_DE.pdf)