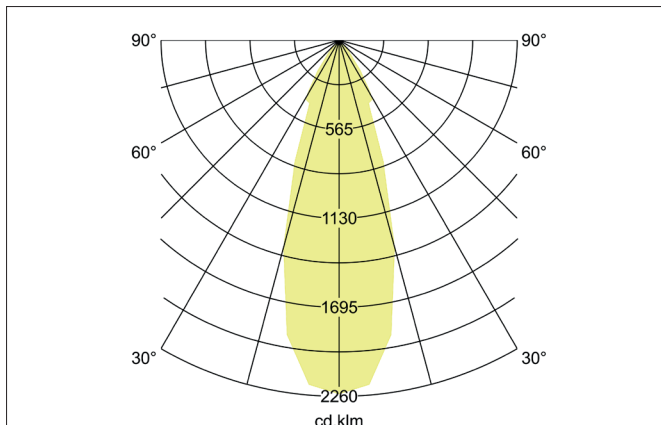
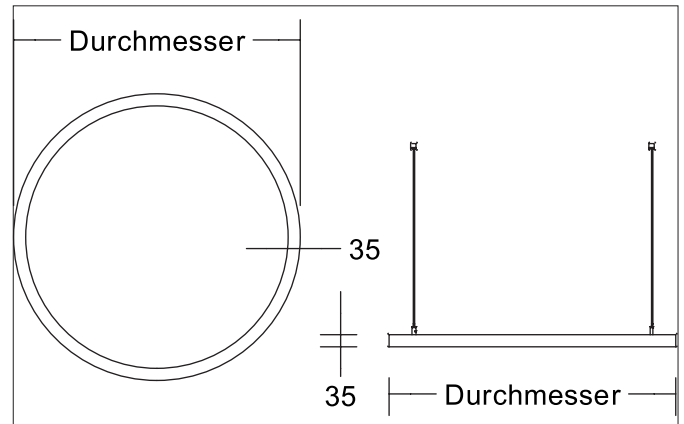
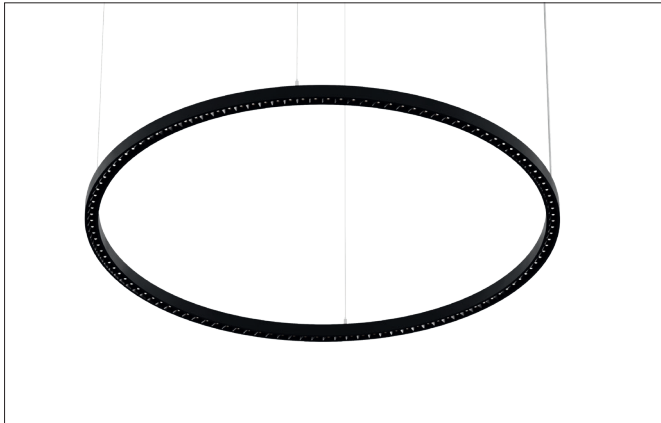


DEVON LED Pendant Ring Light, DALI-2 dimmable

Article no. 84012183


Tender

Round LED pendant ring luminaire, luminaire diameter 1200 mm, height 35 mm, for pendant mounting. Pendant length max. 5,000 mm Weight 9.000 kg, black / silver reflector with rotationally symmetrical narrow-wide beam light distribution. Opal plastic cover, rated luminous flux 6,000 lm, UGR < 19, rated wattage 1 x 46 W, warm white light color, most similar color temperature (CCT) 3,000 K, general color rendering index CRI > 80, service life L70/B50 at 25 °C: 50,000 h, housing material: aluminum / steel / plastic, color: textured black, permissible ambient temperature (ta): -20 °C - +25 °C, protection class (EN 61140): I, degree of protection (DIN EN 60529): IP20. With electronic control gear, DALI-2 dimmable.

Article data	
Article no.	84012183
GTIN	4255752508090
Series name	DEVON
Short description	LED Pendant Ring Light, DALI-2 dimmable
Material	Aluminium / Steel / Plastic
Colour	Black
Type of surface	Structure
Shape	Round
Outer diameter	1200 mm
Hight	35 mm
Weight	9.000 kg
Conformance	CE, UKCA

DEVON LED Pendant Ring Light, DALI-2 dimmable

Article no. 84012183

Lighting technology	
Colour temperature	3.000 K
Light colour	White
Light output	Direct
Luminous flux	6,000 lm
System efficiency	130 lm/W
McAdam-Step	McAdam-Step 3
Colour rendering	CRI > 80
Reflector	hochglänzend / facettiert
Reflector colour	schwarz / silber
Reflector material	Polycarbonate
Beam angle	36°
Glare evaluation	UGR < 19
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	46 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Lamp	LED
Lamp holder	Without fitting
Protection class	I
Degree of protection	IP20
Dimmable	Yes
Control	DALI-2
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Rated life time L70/B50 at 25 °C	50,000 h
Energy efficiency class	nicht erforderlich

Mounting technology	
Mounting method	Suspended
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Pendulum length min.	1,000 mm
Pendulum length max.	5,000 mm
Pendant length single suspension	1.000 - 5.000 mm
Pendulum length centre canopy	1000 - 5000 mm
Number of cable suspensions	4
Material cover	Plastic, opal
Suitable for through-wiring	No

Packing data	
Gross weight	10 kg
Length of packaging	1,230 mm
Packaging width	1,230 mm
Packaging height	90 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>

DEVON LED Pendant Ring Light, DALI-2 dimmable

Article no. 84012183

Optional accessories

Article no.: 82012000DG
Acoustic-Kit, D=1200mm

Dimensions: 1200 mm x 35 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_82012000DG_2021_DE.pdf

Article no.: 82012000HG
Acoustic-Kit, D=1200mm

Dimensions: 1200 mm x 35 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_82012000HG_2021_DE.pdf

Article no.: 82012000BL
Acoustic-Kit, D=1200mm

Dimensions: 1200 mm x 35 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_82012000BL_2021_DE.pdf

Article no.: 82012000GR
Acoustic-Kit, D=1200mm

Dimensions: 1200 mm x 35 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_82012000GR_2021_DE.pdf

Article no.: 82012000GE
Acoustic-Kit, D=1200mm

Dimensions: 1200 mm x 35 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_82012000GE_2021_DE.pdf

Article no.: 82012000OR
Acoustic-Kit, D=1200mm

Dimensions: 1200 mm x 35 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_82012000OR_2021_DE.pdf

Article no.: 82012000RO
Acoustic-Kit, D=1200mm

Dimensions: 1200 mm x 35 mm
https://www.brumberg.com/fileadmin/products/Datenblatt_82012000RO_2021_DE.pdf