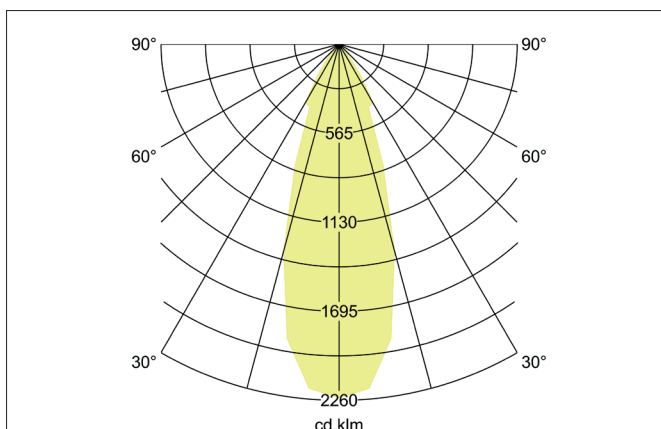
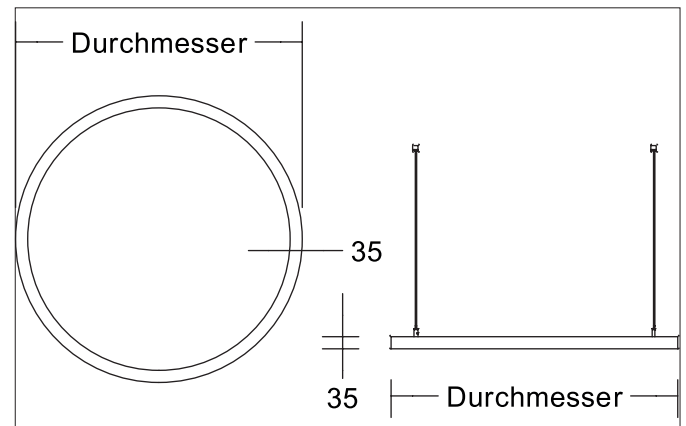
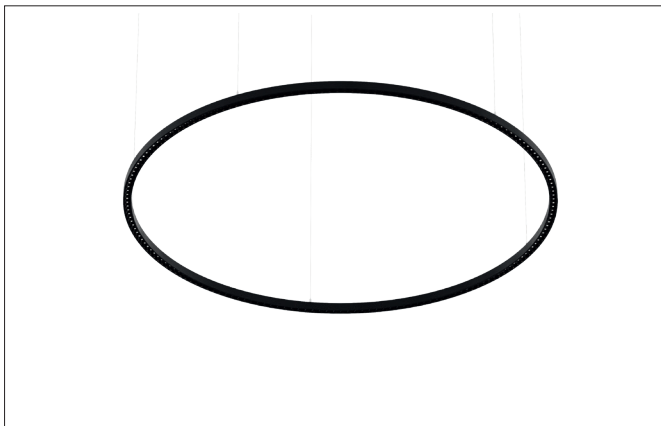


**DEVON LED Pendant Ring Light, DALI-2 dimmable**

Article no. 84014183


**Tender**

LED Pendant Ring Light, DALI-2 dimmable, Round. Luminaire diameter 1800.0 mm, Height 35.0 mm, for pendulum mounting. Pendulum length max. 5000.0 mm Weight 11.0 kg, Reflector schwarz / silber with rotationssymmetrical, deep, wide distributed light intensity. Cover plastic, opal. Luminous flux 9.000 lm, UGR < 19, Power 1 x 68 W, Light colour warm white, Correlated color temperature (CCT) 3.000 K, Colour rendering index CRI > 80, Rated life time L70/B50 at 25 °C: 50.000 h, Housing material: Aluminium / Steel / Plastic, Colour: Black structure, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP20. With electronic driver, DALI-2 dimmable.

| Article data      |                                         |
|-------------------|-----------------------------------------|
| Article no.       | 84014183                                |
| GTIN              | 4255752508106                           |
| Series name       | DEVON                                   |
| Short description | LED Pendant Ring Light, DALI-2 dimmable |
| Material          | Aluminium / Steel / Plastic             |
| Colour            | Black                                   |
| Type of surface   | Structure                               |
| Shape             | Round                                   |
| Outer diameter    | 1800 mm                                 |
| Height            | 35 mm                                   |
| Weight            | 11.000 kg                               |
| Conformance       | CE, UKCA                                |

**DEVON LED Pendant Ring Light, DALI-2 dimmable**

Article no. 84014183

| Lighting technology          |                           |
|------------------------------|---------------------------|
| Colour temperature           | 3.000 K                   |
| Light colour                 | White                     |
| Light output                 | Direct                    |
| Luminous flux                | 9,000 lm                  |
| System efficiency            | 132 lm/W                  |
| McAdam-Step                  | McAdam-Step 3             |
| Colour rendering             | CRI > 80                  |
| Reflector                    | hochglänzend / facettiert |
| Reflector colour             | schwarz / silber          |
| Reflector material           | Polycarbonate             |
| Beam angle                   | 36°                       |
| Glare evaluation             | UGR < 19                  |
| Light sharing                | Symmetric                 |
| Adjustable color temperature | No                        |

| Operating technology of the luminaire |                                                                                                                                                          |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| System output                         | 68 W                                                                                                                                                     |
| Voltage type                          | AC                                                                                                                                                       |
| AC nominal voltage max                | 230 V                                                                                                                                                    |
| Frequency max                         | 50 Hz                                                                                                                                                    |
| Lamp                                  | LED                                                                                                                                                      |
| Lamp holder                           | Without fitting                                                                                                                                          |
| Protection class                      | I                                                                                                                                                        |
| Degree of protection                  | IP20                                                                                                                                                     |
| Dimmable                              | Yes                                                                                                                                                      |
| Control                               | DALI-2                                                                                                                                                   |
| Bulb change possible                  | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |
| Rated life time L70/B50 at 25 °C      | 50,000 h                                                                                                                                                 |

| Mounting technology              |                  |
|----------------------------------|------------------|
| Mounting method                  | Suspended        |
| Place of installation            | Ceiling-mounted  |
| Adjustability                    | Not adjustable   |
| Pendulum length min.             | 1,000 mm         |
| Pendulum length max.             | 5,000 mm         |
| Pendant length single suspension | 1.000 - 5.000 mm |
| Pendulum length centre canopy    | 1000 - 5000 mm   |
| Number of cable suspensions      | 5                |
| Material cover                   | Plastic, opal    |
| Suitable for through-wiring      | No               |

| Packing data            |                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gross weight            | 14 kg                                                                                                                                                                                                                                                                                                                                                                          |
| Length of packaging     | 1,830 mm                                                                                                                                                                                                                                                                                                                                                                       |
| Packaging width         | 1,830 mm                                                                                                                                                                                                                                                                                                                                                                       |
| Packaging height        | 90 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |