
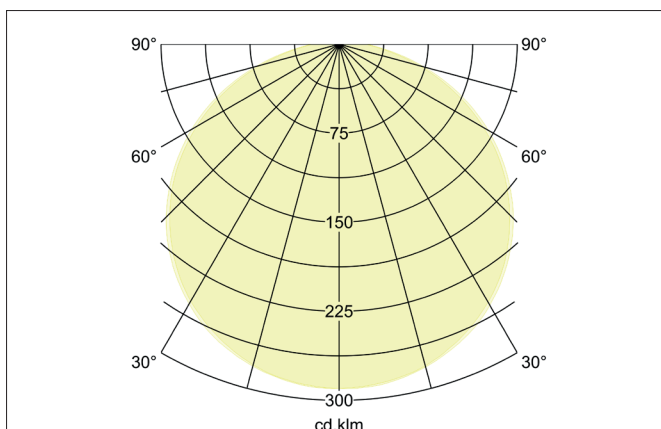
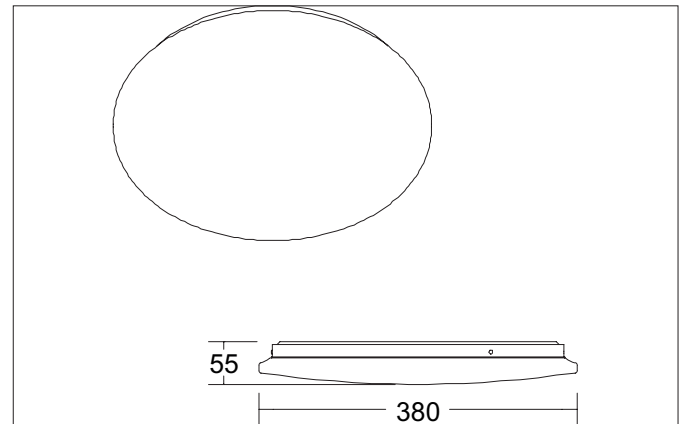


**PANAY MAXI LED surface-mounted ceiling light, switchable, with microwave motion sensor**

Article no. 12578073


**Tender**

LED surface-mounted ceiling downlight, switchable, with microwave motion sensor, luminaire diameter 380 mm, height 55 mm, weight 0.435 kg, with rotationally symmetrical narrow-wide beam light distribution. Opal plastic cover, rated luminous flux 2,320 lm, rated wattage 1 x 25 W, warm white light color, most similar color temperature (CCT) 3,000 K, general color rendering index CRI > 80, service life L70 / B50 at 25 °C: 50,000 h, housing material: steel / plastic, color: white, permissible ambient temperature (ta): -20 °C - +25 °C, protection class (EN 61140): I, degree of protection (DIN EN 60529): IP20, degree of impact resistance according to IEC62262: IK05. With electronic control gear, switchable.

**Product Benefits**

- Attractively priced surface-mounted ceiling or wall light in round design.
- Version 3,000 K, switchable, with microwave sensor.
- Three different sizes available.
- Also available in 3CCT version (3,000 K / 4,000 K / 6,000 K) and phase cut-off dimmable available.

**PANAY MAXI LED surface-mounted ceiling light, switchable, with microwave motion sensor**

Article no. 12578073

Article data	
Article no.	12578073
GTIN	4255752500674
Series name	PANAY MAXI
Short description	LED surface-mounted ceiling light, switchable, with microwave motion sensor
Material	Steel / Plastic
Colour	White
Type of surface	Glossy
Shape	Round
Outer diameter	380 mm
Height	55 mm
Scope of delivery	incl. converter for connection to 230 V mains voltage, switchable and microwave motion sensor
Weight	0.435 kg
Conformance	UKCA

Lighting technology	
Colour temperature	3.000 K
Light colour	White
Light output	Direct
Luminous flux	2,320 lm
System efficiency	93 lm/W
Colour rendering	CRI > 80
Beam angle	120°
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	25 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Lamp	LED
Protection class	I
Degree of protection	IP20
Dimmable	No
Control	on/off
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Rated life time L70/B50 at 25 °C	50,000 h

Mounting technology	
Mounting method	Surface mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Impact resistance	IK05
Material cover	Plastic, opal
Suitable for through-wiring	Yes

**PANAY MAXI LED surface-mounted ceiling light, switchable, with microwave motion sensor**  
Article no. 12578073

Packing data	
Gross weight	0.485 kg
Length of packaging	390 mm
Packaging width	390 mm
Packaging hight	65 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>