
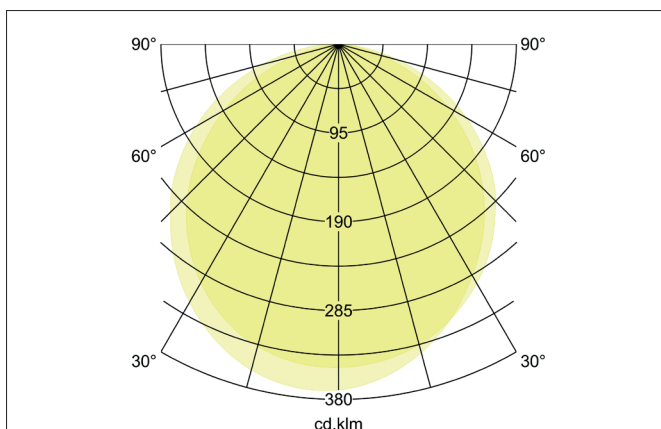


RICO LED surface-mounted wall light, IP65, switchable
Article no. 60043103

Light.
For Generations.

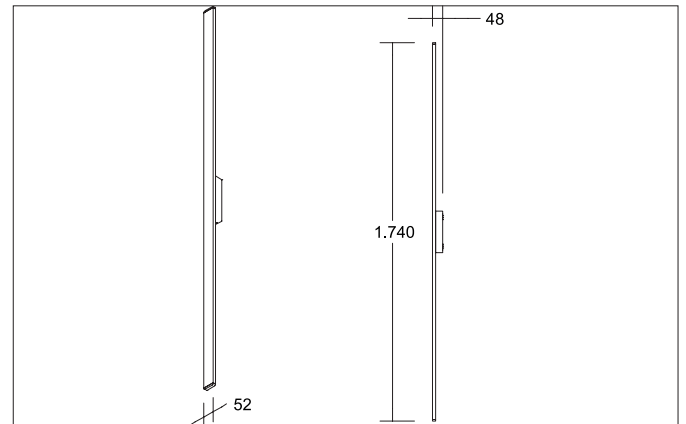

Tender

LED surface-mounted wall light, IP65, switchable, Rectangular., Hight 48.0 mm Weight 2.0 kg, with rotattionssymmetrical, deep, wide distributed light intensity. optimal light distribution due to a plastic, opal cover.Luminous flux 2.600 lm, Power 1 x 28 W, Light colour warm white to warm white, Correlated color temprature (CCT) 3.000 - 3.000 K, Colour rendering index CRI > 90, Housing material: Aluminium / Plastic, Colour: Graphite, Permissible ambient temperature (ta): -20 to +45°C, Protection class (EN 6 1140): I, Degree of protection (DIN EN 60529): IP65, shock resistance according to IEC62262: IK06 .With electronic driver, on/off switchable.

| Article data | |
|-------------------|---|
| Article no. | 60043103 |
| GTIN | 4255752500414 |
| Series name | RICO |
| Short description | LED surface-mounted wall light, IP65, switchable |
| Material | Aluminium / Plastic |
| Colour | Graphite |
| Type of surface | Structure |
| Shape | Rectangular |
| Hight | 48 mm |
| Scope of delivery | incl. converter for connection to 230 V mains voltage, switchable |
| Weight | 2.000 kg |

RICO LED surface-mounted wall light, IP65, switchable

Article no. 60043103

Light.
For Generations.

| Lighting technology | |
|------------------------------|-------------|
| Colour temperature | 3.000 K |
| Light colour | White |
| Light output | Indirect |
| Luminous flux | 2,600 lm |
| System efficiency | 93 lm/W |
| Colour rendering | CRI > 90 |
| Luminaire optics | Cover satin |
| Reflector | Without |
| Beam angle | 120° |
| Light sharing | Symmetric |
| Adjustable color temperature | No |

| Operating technology of the luminaire | |
|---------------------------------------|--|
| System output | 28 W |
| Voltage type | AC |
| AC nominal voltage max | 230 V |
| Frequency max | 50 Hz |
| Frequency min | 50 Hz |
| Lamp | LED |
| Lamp holder | Without fitting |
| Protection class | I |
| Degree of protection | IP65 |
| Ambient temperature | -20 bis +45°C |
| Dimmable | No |
| Control | on/off |
| Bulb change possible | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |

| Mounting technology | |
|-----------------------|------------------|
| Mounting method | Surface mounting |
| Place of installation | Wall-mounted |
| Adjustability | Not adjustable |
| Impact resistance | IK06 |
| stamp | UKCA |
| Further references | Outdoor |
| Material cover | Plastic, opal |

| Packing data | |
|-------------------------|---|
| Gross weight | 2.6 kg |
| Length of packaging | 60 mm |
| Packaging width | 55 mm |
| Packaging height | 1,895 mm |
| Disposal at end of life | This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment. |