

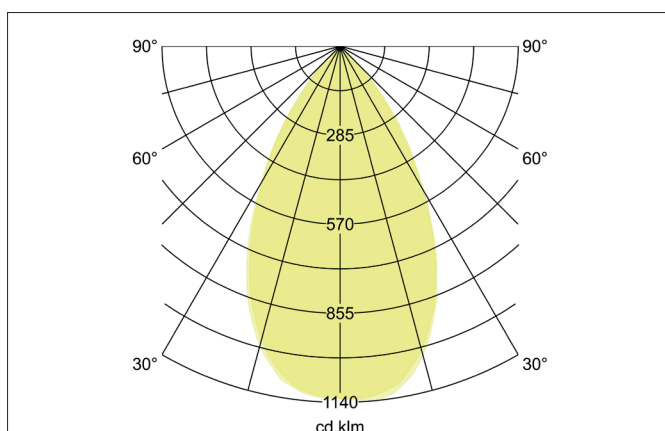



MUNA MINI LED recessed downlight, 3CCT, UGR < 19, trailing edge dimmable, reflector silver, bevelled

Article no. 12564073


Tender

LED recessed downlight, 3CCT, UGR < 19, trailing edge dimmable, reflector silver, bevelled, Round. Toolless ceiling installation by installation springs. Ceiling cut-out Ø 145 mm, Installation depth 87 mm, Outer diameter 174 mm, Weight 0,4 kg, Reflector silver with rotations-symmetrical, deep, wide distributed light intensity. Cover polycarbonat opal. Luminous flux 1.900 lm, UGR < 19, Power 1 x 20 W, Light colour warm white to daylight white, Correlated color temprature (CCT) 3.000 - 5.700 K, Colour rendering index CRI > 80, Rated life time L70/B10 at 25 °C: 80.000 h, Rated life time L70/B50 at 25 °C: 50.000 h, Rated life time L80/B50 at 25 °C: 50.000 h, Housing material: Aluminium / Polycarbonate / Steel, Colour: white matt, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): II, Degree of protection (DIN EN 60529): IP20. With electronic driver, Trailing-edge phase dimmable.

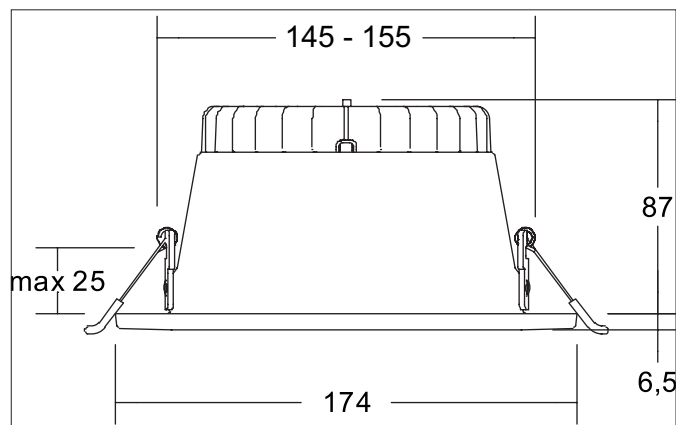

MUNA MINI LED recessed downlight, 3CCT, UGR < 19, trailing edge dimmable, reflector silver, bevelled
 Article no. 12564073

Product Benefits

- Rundes Einbaudownlight aus Aluminium mit großzügig dimensioniertem Wärmemanagement.
- 3CCT: 3.000 K, 4.000 K oder 5.700 K einstellbar.
- Hochwertiger Aluminiumreflektor mit Linse.
- Einfache und werkzeuglose Montage.
- UGR < 19.
- Geringe Einbautiefe von 87 mm, Durchmesser von 174 mm, Deckenausschnitt 145-155 mm.
- Phasenabschnitt dimmbar.
- Abdeckring abnehmbar und gegen schwarzen Ring austauschbar (separates Zubehör).
- Ring in rund schwarz oder rund weiß auch mit zusätzlichem, abgehängtem Floatglas (teilmattiert) lieferbar (separates Zubehör).
- Abdeckrahmen auch in quadratisch in schwarz oder weiss statt rund lieferbar (separates Zubehör).

Article data	
Article no.	12564073
GTIN	4255752500865
Series name	MUNA MINI
Short description	LED recessed downlight, 3CCT, UGR < 19, trailing edge dimmable, reflector silver, bevelled
Material	Aluminium / Polycarbonate / Steel
Colour	white matt
Type of surface	Matt
Shape	Round
Outer diameter	174 mm
Built-in diameter	145 mm
Installation depth	87 mm
Hight	6.5 mm
Scope of delivery	inkl. Konverter zum Anschluss an 230 V-Netzspannung, Phasenabschnitt dimmbar mit Schalter zur Farbtemperaturauswahl: 3.000 K / 4.000 K / 5.700 K
Weight	0.4 kg
Conformance	CE, UKCA

Lighting technology	
Colour temperature	3.000 K / 4.000 K / 5.700 K
Color Temperature 1	3,000 K
Color Temperature 2	4,000 K
Color Temperature 3	5,700 K
Light output	Direct
Luminous flux	1,900 lm
Luminous flux 1	1,750 lm
Luminous flux 2	1,970 lm
Luminous flux 3	1,900 lm
System efficiency	95 lm/W
Colour rendering	CRI > 80
Reflector	Faceted
Reflector colour	silver
Beam angle	60°
Glare evaluation	UGR < 19
Light sharing	Symmetric
Adjustable color temperature	Stages


MUNA MINI LED recessed downlight, 3CCT, UGR < 19, trailing edge dimmable, reflector silver, bevelled

Article no. 12564073

Operating technology of the luminaire	
System output	20 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Lamp	LED
Protection class	II
Degree of protection	IP20
Dimmable	Yes
Control	Trailing-edge phase
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Rated life time L70/B50 at 25 °C	50,000 h
Rated life time L80/B50 at 25 °C	50.000 h
Energy efficiency class	nicht erforderlich

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Max. ceiling thickness	25 mm
Further references	No cover with thermal insulation material
Material cover	Polycarbonat opal
Suitable for through-wiring	Yes, with optional accessories

Packing data	
Gross weight	0.583 kg
Length of packaging	190 mm
Packaging width	190 mm
Packaging height	110 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>



MUNA MINI LED recessed downlight, 3CCT, UGR < 19, trailing edge dimmable, reflector silver, bevelled
Article no. 12564073

Optional accessories

Article no.: 81216070

Cover frame, square, for 12564

Dimensions: 174 mm x 174 mm x 6.5 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_81216070_2021_DE.pdf

Article no.: 81216080

Cover frame, square, for 12564

Dimensions: 174 mm x 174 mm x 6.5 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_81216080_2021_DE.pdf

Article no.: 81211080

Cover ring, round, for 12564

Dimensions: 174 mm x 6.5 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_81211080_2021_DE.pdf

Article no.: 81221070

Cover ring, round, with suspended float glass, partially frosted, for 12564

Dimensions: 174 mm x 25 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_81221070_2021_DE.pdf

Article no.: 81221080

Cover ring, round, with suspended float glass, partially frosted, for 12564

Dimensions: 174 mm x 25 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_81221080_2021_DE.pdf

Article no.: 83330000

Connection box 230 V AC, 3-pole

Dimensions: 80 mm x 41 mm x 34 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_83330000_2021_DE.pdf

Article no.: 81230070

Surface-mounted housing, round, for 12564

Dimensions: 182 mm x 155 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_81230070_2021_DE.pdf

Article no.: 81230080

Surface-mounted housing, round, for 12564

Dimensions: 182 mm x 155 mm

https://www.brumberg.com/fileadmin/products/Datenblatt_81230080_2021_DE.pdf