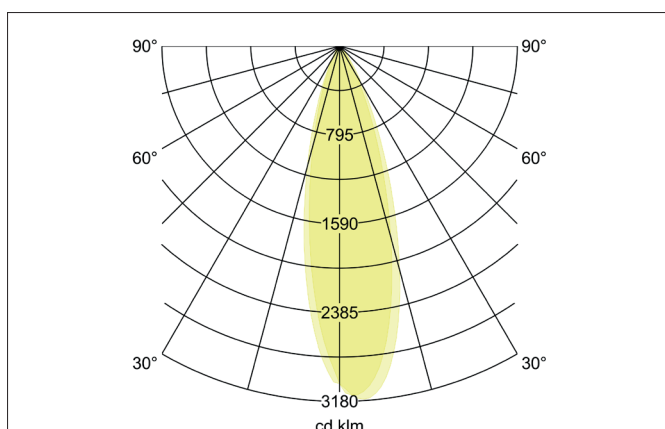
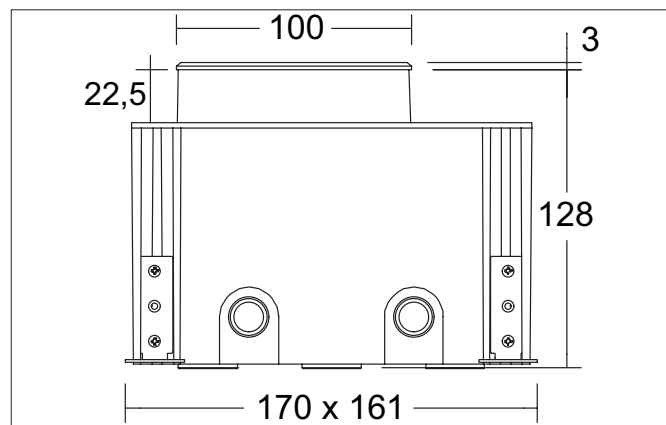


LANKA-R LED recessed floor light, V4A, IP67, switchable

Article no. 14665223

Light.
For Generations.**Tender**

LED recessed floor light, V4A, IP67, switchable, Round. Ceiling cut-out L x W 161 x 170 mm, Installation depth 128 mm, Outer diameter 100 mm, Weight 1,070 kg, Cover glass transparent. Luminous flux 460 lm, Power 1 x 4 W, Light colour warm white, Correlated color temperature (CCT) 3.000 K, Colour rendering index CRI > 80, Housing material: Stainless steel / Aluminium / Glass, Colour: Stainless steel, Permissible ambient temperature (ta): -20 to +45°C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP67, shock resistance according to IEC62262: IK08 .With electronic driver, on/off switchable.

Product Benefits

- Luminaire can be used as a recessed ceiling or floor light.
- Lens can be tilted 30° in both directions.

LANKA-R LED recessed floor light, V4A, IP67, switchable

Article no. 14665223

Light.
For Generations.

Article data	
Article no.	14665223
GTIN	4255752500971
Series name	LANKA-R
Short description	LED recessed floor light, V4A, IP67, switchable
Material	Stainless steel / Aluminium / Glass
Colour	Stainless steel
Shape	Round
Outer diameter	100 mm
Built-in width	170 mm
Built-in length	161 mm
Installation depth	128 mm
Scope of delivery	incl. converter for connection to 230 V mains voltage, switchable, floor installation pot and 5,000 mm connection cable.
Weight	1.070 kg
Length of the connection line	1,000 mm
Conformance	CE

Lighting technology	
Colour temperature	3.000 K
Light colour	White
Light output	Direct
Luminous flux	460 lm
System efficiency	115 lm/W
Colour rendering	CRI > 80
Beam angle	30°
Light sharing	Symmetric/asymmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	4 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Lamp	LED
Lamp holder	Without fitting
Protection class	I
Degree of protection	IP67
Ambient temperature	-20 to +45°C
Dimmable	No
Control	on/off
Length of the connection line	1,000 mm
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Floor-mounted
Adjustability	Pivoted
Swivel angle	30°
Rotation angle	30°
Max. load	1,000 kg
Over rollable	No
Impact resistance	IK08
Further references	V4A
Material cover	Glass transparent
Circlip	Without circlip
Suitable for through-wiring	Yes

LANKA-R LED recessed floor light, V4A, IP67, switchable
Article no. 14665223

Light.
For Generations.

Packing data	
Gross weight	1.281 kg
Length of packaging	205 mm
Packaging width	205 mm
Packaging hight	160 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>