
BRUMBERG


COATIS LED surface-mounted wall light, IP65, switchable

Article no. 10221103

Light. For Generations.





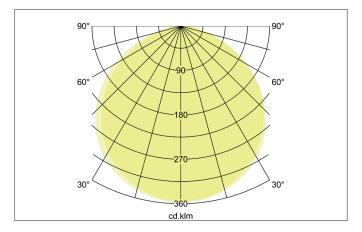



Tende

LED surface-mounted wall light, IP65, switchable, Oval., Hight 72.0 mm Weight 1.34 kg, with rotattionssymmetrical, deep, wide distributed light intensity. optimal light distribution due to a plastic, opal cover.Luminous flux 875 lm, Power 1 x 12 W, Light colour warm white, Correlated color temprature (CCT) 3.000 K, Colour rendering index CRI > 80, Housing material: Aluminium, Colour: Graphite, Permissible ambient temperature (ta): -20 to +45°C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP65, .With electronic driver, on/off switchable.

| Article data | |
|-------------------|---|
| Article no. | 10221103 |
| GTIN | 4255752500308 |
| Series name | COATIS |
| Short description | LED surface-mounted wall light, IP65, switchable |
| Material | Aluminium |
| Colour | Graphite |
| Type of surface | Structure |
| Shape | Oval |
| Outer diameter | 270 mm |
| Hight | 72 mm |
| Scope of delivery | incl. converter for connection to 230 V mains voltage, switchable |
| Weight | 1.340 kg |
| Conformance | CE, UKCA |

BRUMBERG

COATIS LED surface-mounted wall light, IP65, switchable

Article no. 10221103

Light. For Generations.

| Lighting technology | |
|------------------------------|-------------|
| Colour temperature | 3.000 K |
| Light colour | White |
| Light output | Direct |
| Luminous flux | 875 lm |
| System efficiency | 73 lm/W |
| Colour rendering | CRI > 80 |
| Luminaire optics | Cover satin |
| Beam angle | 110° |
| Light sharing | Symmetric |
| Adjustable color temperature | No |

| Operating technology of the luminaire | |
|---------------------------------------|--|
| System output | 12 W |
| Voltage type | AC |
| AC nominal voltage max | 230 V |
| Frequency max | 50 Hz |
| Frequency min | 50 Hz |
| Lamp | LED |
| Lamp holder | Without fitting |
| Protection class | |
| Degree of protection | IP65 |
| Ambient temperature | -20 to +45°C |
| Dimmable | No |
| Control | on/off |
| Bulb change possible | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |

| Mounting technology | |
|-----------------------------|------------------|
| Mounting method | Surface mounting |
| Place of installation | Wall-mounted |
| Adjustability | Not adjustable |
| Further references | Outdoor |
| Material cover | Plastic, opal |
| Suitable for through-wiring | No |

| Packing data | |
|-------------------------|---|
| Gross weight | 1.54 kg |
| Length of packaging | 195 mm |
| Packaging width | 80 mm |
| Packaging hight | 275 mm |
| Disposal at end of life | This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. |
| | By disposing of electrical waste and other old or defective electronics separately, you |
| | support recycling or other forms of re-use. In that way you help to take care and to avoid that |
| | harmful substances get into the environment. |