

VITI LED ground spike spotlight, 230 V AC, IP65, switchable Article no. 60021103



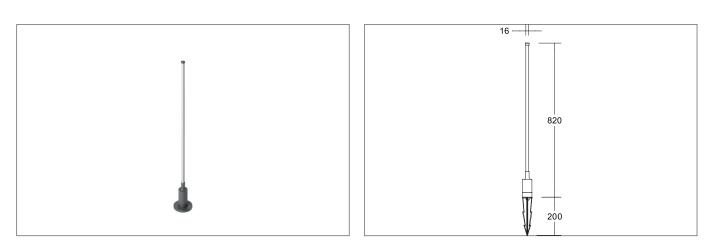



Tender

LED ground spike spotlight, 230 V AC, IP65, switchable, Rectangular., Hight 820.0 mm Weight 0.67 kg, with rotattionssymmetrical, deep, wide distributed light intensity. Cover plastic, opal. Luminous flux 743 lm, Power 1 x 10 W, Colour rendering index CRI > 90, Housing material: Aluminium / Plastic, Colour: Graphite, Permissible ambient temperature (ta): -20 to +45°C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP65, shock resistance according to IEC62262: IK06 .With electronic driver, on/off switchable.

Article data	
Article no.	60021103
GTIN	4255752500377
Series name	VITI
Short description	LED ground spike spotlight, 230 V AC, IP65, switchable
Material	Aluminium / Plastic
Colour	Graphite
Type of surface	Structure
Shape	Rectangular
Hight	820 mm
Scope of delivery	incl. converter for connection to 230 V mains voltage, switchable, 2,000 mm connection
	cable and plug.
Weight	0.670 kg
Conformance	CE, UKCA

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 16.01.2025 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/

VITI LED ground spike spotlight, 230 V AC, IP65, switchable Article no. 60021103

Lighting technology	
Colour temperature	3.000 K
Light colour	White
Light output	Direct
Luminous flux	743 lm
System efficiency	74 lm/W
Colour rendering	CRI > 90
Luminaire optics	Cover satin
Reflector	Without
Beam angle	120°
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	10 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Frequency min	50 Hz
Lamp	LED
Lamp holder	Without fitting
Protection class	
Degree of protection	IP65
Ambient temperature	-20 to +45°C
Dimmable	No
Control	on/off
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service
	technician commissioned by him or a similarly qualified person.

Mounting technology	
Mounting method	Surface mounting
Place of installation	Floor-mounted
Adjustability	Not adjustable
Impact resistance	IK06
Further references	Outdoor
Material cover	Plastic, opal

Packing data	
Gross weight	0.97 kg
Length of packaging	145 mm
Packaging width	105 mm
Packaging hight	870 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.

All technical data as well as, weight and measurements are based on rated values and had been carefully prepared. We reserve the right to make technical changes which are are important in progressing. Product pictures are examples and can vary from the original. Subject to errors. Date 16.01.2025 Orders are placed under our general terms and conditions under https://www.brumberg.com/en/terms-and-conditions/general-terms-and-conditions-of-sale/