
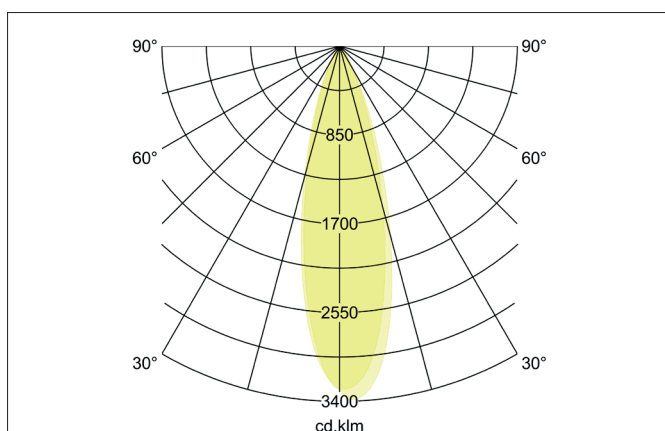
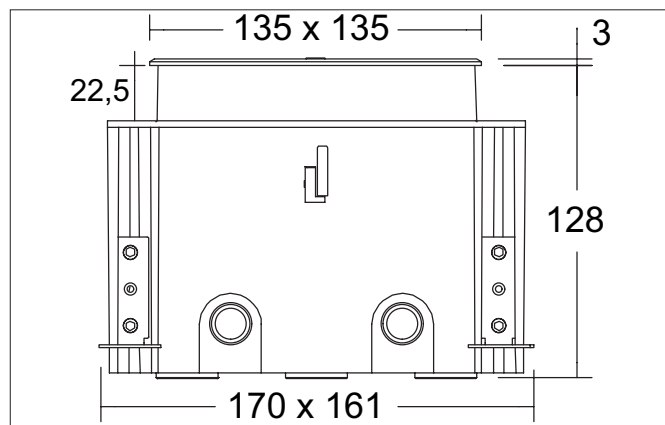


**LANKO-S LED recessed floor light, V4A, IP67, switchable**

Article no. 14695083

Light.  
For Generations.**Tender**

LED recessed floor light, V4A, IP67, switchable, Angular. Ceiling cut-out L x W 161 x 170 mm, Installation depth 128 mm, Length 135 mm, Width 135 mm, Weight 1,643 kg, with rotationssymmetrical, deep, wide distributed light intensity. Cover glass transparent. Luminous flux 920 lm, Power 1 x 8 W, System Efficiency 115 lm/W, Light colour warm white, Correlated color temprature (CCT) 3.000 K, Colour rendering index CRI > 80, , Colour: Black, Permissible ambient temperature (ta): -20 to +45°C, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP67, shock resistance according to IEC62262: IK08 .With electronic driver, on/off switchable.

**Product Benefits**

- Lens can be tilted 30° in both directions.

**LANKO-S LED recessed floor light, V4A, IP67, switchable**

Article no. 14695083

Light.  
For Generations.

Article data	
Article no.	14695083
GTIN	4255752501497
Series name	LANKO-S
Short description	LED recessed floor light, V4A, IP67, switchable
Colour	Black
Shape	Angular
Built-in width	170 mm
Built-in length	161 mm
Installation depth	128 mm
Length	135 mm
Width	135 mm
Scope of delivery	incl. converter for connection to 230 V mains voltage, switchable, floor installation pot and 1,000 mm connection cable.
Weight	1.643 kg
Length of the connection line	1,000 mm
Conformance	CE

Lighting technology	
Colour temperature	3.000 K
Light colour	White
Light output	Direct
Luminous flux	920 lm
System efficiency	115 lm/W
Colour rendering	CRI > 80
Beam angle	30°
Light sharing	Symmetric
Adjustable color temperature	No

Operating technology of the luminaire	
System output	8 W
Voltage type	AC
AC nominal voltage max	230 V
Frequency max	50 Hz
Lamp	LED
Lamp holder	Without fitting
Protection class	I
Degree of protection	IP67
Ambient temperature	-20 to +45°C
Dimmable	No
Control	on/off
Length of the connection line	1,000 mm
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Floor-mounted
Adjustability	Pivoted
Swivel angle	30°
Rotation angle	30°
Max. load	1,000 kg
Over rollable	No
Impact resistance	IK08
Material cover	Glass transparent
Circlip	Without circlip
Suitable for through-wiring	Yes

**LANKO-S LED recessed floor light, V4A, IP67, switchable**  
Article no. 14695083

Light.  
For Generations.

Packing data	
Gross weight	1.859 kg
Length of packaging	205 mm
Packaging width	205 mm
Packaging hight	160 mm
Disposal at end of life	<p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p>

Accessories