
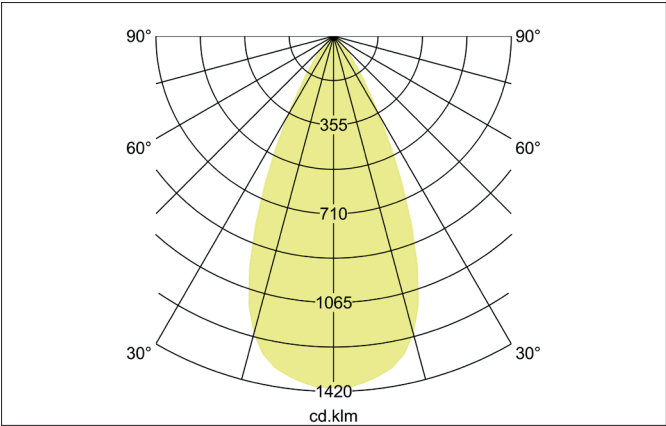


LAVILO II MIDI LED Wallwasher, IP66  
Article no. 60895644

Light.  
For Generations.

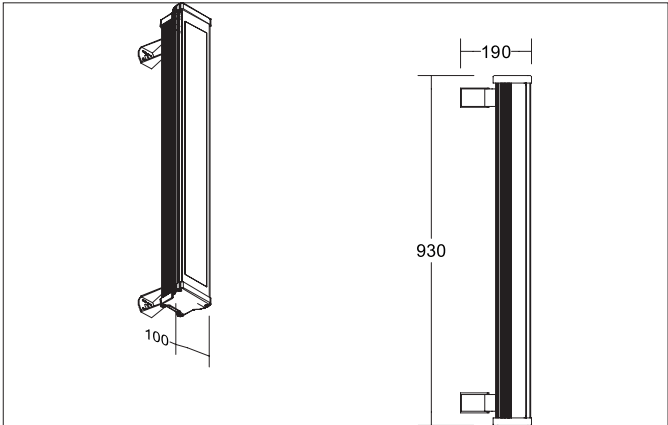

**Tender**  
LED Wallwasher, IP66, Rectangular. Luminaire length 930.0 mm, Luminaire width 114.0 mm, Hight 97.0 mm Weight 6.6 kg, with rotattions-symmetrical, deep, wide distributed light intensity. Cover glass transparent. Luminous flux 8.150 lm, Power 63 W, Light colour neutral white, Correlated color temprature (CCT) 4.000 K, Colour rendering index CRI > 80, Housing material: Aluminium / Glass, Colour: Titanium, Permissible ambient temperature (ta): -25 to +50°, Protection class (EN 61140): I, Degree of protection (DIN EN 60529): IP66, shock resistance according to IEC62262: IK08 .With electronic driver, DALI-DT6 dimmable.

| Article data      |                                                              |
|-------------------|--------------------------------------------------------------|
| Article no.       | 60895644                                                     |
| GTIN              | 4251433993636                                                |
| Series name       | LAVILO II MIDI                                               |
| Short description | LED Wallwasher, IP66                                         |
| Material          | Aluminium / Glass                                            |
| Colour            | Titanium                                                     |
| Type of surface   | Matt                                                         |
| Shape             | Rectangular                                                  |
| Length            | 930 mm                                                       |
| Width             | 114 mm                                                       |
| Hight             | 97 mm                                                        |
| Scope of delivery | incl. converter for connection to 230 V mains voltage, DALI. |
| Weight            | 6.600 kg                                                     |
| Conformance       | CE, UKCA                                                     |

**LAVILO II MIDI LED Wallwasher, IP66**

Article no. 60895644

Light.  
For Generations.

| Lighting technology          |               |
|------------------------------|---------------|
| Colour temperature           | 4.000 K       |
| Light colour                 | White         |
| Light output                 | Direct        |
| Luminous flux                | 8,150 lm      |
| System efficiency            | 129 lm/W      |
| McAdam-Step                  | McAdam-Step 5 |
| Colour rendering             | CRI > 80      |
| Luminaire optics             | Lens          |
| Beam angle                   | 50°           |
| Light sharing                | Symmetric     |
| Adjustable color temperature | No            |

| Operating technology of the luminaire |                                                                                                                                                          |
|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| System output                         | 63 W                                                                                                                                                     |
| Voltage type                          | AC                                                                                                                                                       |
| AC nominal voltage max                | 230 V                                                                                                                                                    |
| Frequency max                         | 50 Hz                                                                                                                                                    |
| Frequency min                         | 50 Hz                                                                                                                                                    |
| Lamp                                  | LED                                                                                                                                                      |
| Lamp holder                           | Without fitting                                                                                                                                          |
| Protection class                      | I                                                                                                                                                        |
| Degree of protection                  | IP66                                                                                                                                                     |
| Ambient temperature                   | -25 to +50°                                                                                                                                              |
| Control                               | DALI-DT6                                                                                                                                                 |
| Bulb change possible                  | The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person. |
| Rated life time L90/B10 at 25 °C      | 50.000 h                                                                                                                                                 |

| Mounting technology         |                   |
|-----------------------------|-------------------|
| Mounting method             | Surface mounting  |
| Place of installation       | Wall-mounted      |
| Adjustability               | Pivoted           |
| Impact resistance           | IK08              |
| Material cover              | Glass transparent |
| Suitable for through-wiring | No                |

| Packing data            |                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gross weight            | 7.1 kg                                                                                                                                                                                                                                                                                                                                                                         |
| Length of packaging     | 980 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Packaging width         | 160 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Packaging height        | 140 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |