


## DR (metr. + PG)



20.080.250\_a

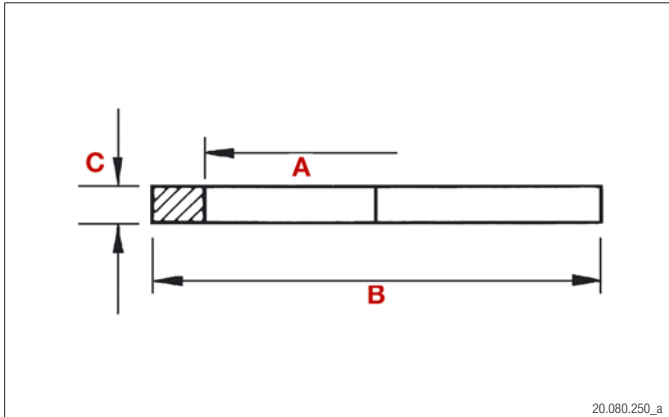

20.080.250\_b

**MAT**

Stahl verzinkt  
Acier galvanisé  
Galvanized steel

**NORM**

DIN 46320/EN 50262

### Druckring DR (metr.+PG)


Druckring verwendet als Unterlagscheibe zu Dichtringen in Kombination mit Kabelverschraubungen und Zubehör.

### Rondelle DR (métr.+PG)

Anneau de pression à utiliser comme rondelle en combinaison avec des presse-étoupes et accessoires.

### Washer DR (metr.+PG)

Pressure washer suitable as washer for gaskets in combination with cable glands and accessories.

NORM metr.	NORM PG	A mm	B mm	C mm			Plica-Nr.	E-Nr.	VE
M12	PG7	8	11.0	0.8			91.8110.026	121 910 009	100
M16	PG9	10	13.5	1.0			91.8110.050	121 910 109	100
M20	PG11	12	17.0	0.8			91.8110.093	121 910 209	100
	PG13.5	14	18.5	0.8			91.8110.115	121 910 309	100
M25	PG16	16	20.5	1.0			91.8110.131	121 910 409	100
M32	PG21	21	26.0	1.0			91.8110.166	121 910 509	100
M40	PG29	30	35.0	1.0			91.8110.174	121 910 609	100
M50	PG36	38	45.0	1.0			91.8110.182	121 910 709	100
M63	PG42	43	52.0	1.0			91.8110.190	121 911 909	100
M75	PG48	48	57.0	1.0			91.8110.204	121 910 809	100