


GEW-RI (PG)

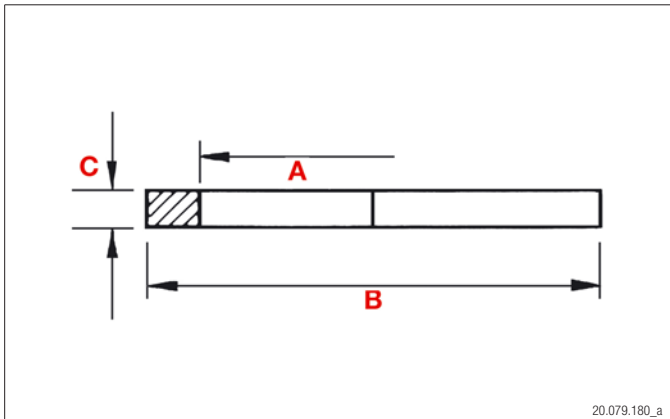

MAT
Neopren 80 Shore
Néoprène 80 Shore
Neoprene 80 Shore

TEMP
-40°C bis +100°C
-40°C à +100°C
-40°C to +100°C

Anschlussgewinde-Dichtring PE

Beständig gegen Öle, Säuren und schwache Laugen.

Joint au filetage PE

Résistant aux huiles, acides et aux lessives modérées.

Seal ring PE

Resistant to mineral oil, acids and soft leaches.

NORM PG	A mm	B mm	C mm		Plica-Nr.	E-Nr.	VE
PG7	11.3	17	1.2		90.8115.207		100
PG9	13.9	20.0	1.2		90.8115.209	121 933 409	100
PG11	17.1	23	1.2		90.8115.211		100
PG13.5	19.0	25	1.2		90.8115.213		100
PG16	21.0	27	1.2		90.8115.216		100
PG21	26.6	34	1.5		90.8115.221		100
PG29	35.2	45	1.5		90.8115.229		100
PG36	45.2	56	1.5		90.8115.236		50
PG42	52.2	67	1.5		90.8115.242		50
PG48	57.7	72	1.5		90.8115.248		50