


# BS (metr. + PG)

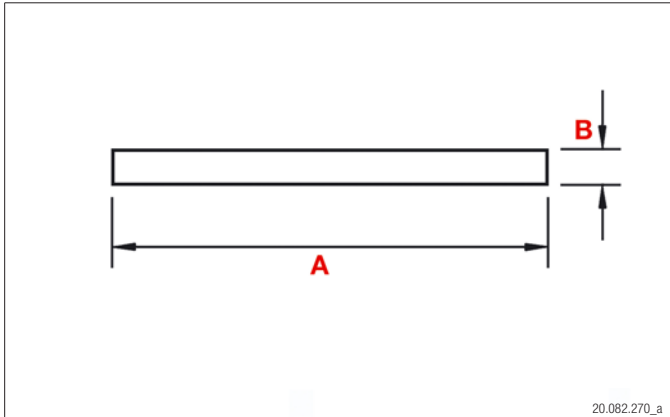

<b>MAT</b>	Polycarbonat Polycarbonate Polycarbonate
<b>TEMP</b>	-40°C bis +135°C -40°C à +135°C -40°C to +135°C

## Blindscheibe BS

Als Staubverschluss für Kabelverschraubungen verwendbar.  
(WADI C, PLICA-TEC K, PLICA-TEC MS).

## Disque obturateur BS

Protection anti-poussière.  
(WADI C, PLICA-TEC K, PLICA-TEC MS).

## Dust disc BS

Dust protection for cable glands.  
(WADI C, PLICA-TEC K, PLICA-TEC MS).

NORM metr.	NORM PG	A mm	B mm			Plica-Nr.	E-Nr.	VE
M12	PG7	11.4	1.1			90.7006.012	121 970 009	100
M16	PG9	13.6	1.1			90.7006.020	121 970 109	100
M20	PG11	16.5	1.1			90.7006.039	121 970 209	100
	PG13.5	18.5	1.1			90.7006.047	121 970 309	100
M25	PG16	20.6	1.1			90.7006.055	121 970 409	100
M32	PG21	26.0	1.5			90.7006.063	121 970 509	100
M40	PG29	35.0	1.5			90.7006.071	121 970 609	100
M50	PG36	45.0	1.75			90.7006.080	121 970 709	100
M63	PG42	52.1	1.75			90.7006.098	121 970 909	100
M75	PG48	56.8	1.75			90.7006.101	121 970 809	100