


PLICA-SEM (PG) – WQG



20.011.011_a

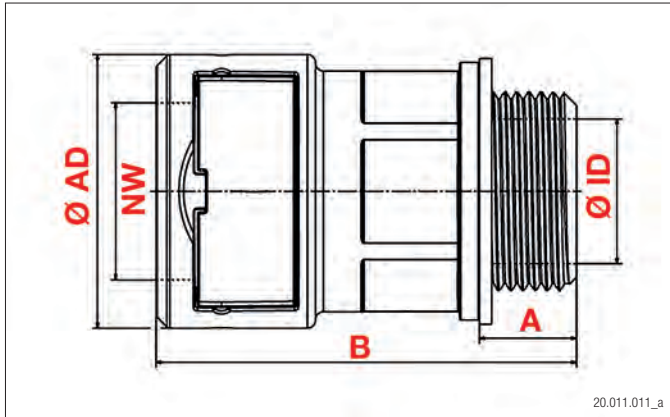

20.011.011_b

MAT

Polyamid
Polyamide
Polyamide



TEMP

-40°C bis +100°C
-40°C à +100°C
-40°C to +100°C



IP 66



Nicht ausbreitend UL 94 V2
Non propagateur UL 94 V2
No propagator UL 94 V2

HALO

halogenfrei
sans halogène
halogen free

NORM

EN 317026

Kabelverschraubung PLICA-SEM, WQG, gerade

Plica-SEM WQG ist eine Schnellverschraubung PG. Einfache und schnelle Montage und Demontage. Konisch dichtend, beständig gegen Öl und Benzin, weitgehend säure- und lösungsmittelbeständig, silikon-, cadmium- und halogenfrei.

Presse-étoupe PLICA-SEM, WQG, droit

Le Plica-SEM WQG est un raccord rapide PG. Montage et démontage simples et rapides. Joint conique, résistant à l'huile et à l'essence, largement résistant aux acides et aux solvants, sans silicone, cadmium et halogène.

Cable gland PLICA-SEM, WQG, straight

Plica-SEM WQG is a PG quick-action fitting. Simple and quick assembly and disassembly. Conically sealing, resistant to oil and petrol, largely resistant to acids and solvents, free of silicone, cadmium and halogen.

NORM NW/DN		 mm	 mm	 mm	A mm	B mm		Plica-Nr.	VE
7.5	PG7	17.0	7.0	16	12.0	35.0		93.8000.001	50
								93.8000.012	50
10.0	PG9	20.0	10.0	18	13.0	37.0		93.8000.002	50
								93.8000.013	50
12.0	PG11	23.0	12.0	21	12.0	39.5		93.8000.003	50
								93.8000.014	50
14.0	PG13.5	26.0	14.5	24	13.0	42.0		93.8000.004	50
								93.8000.015	50
16.0/17.0	PG13.5	26.0	15.5	27	13.0	42.0		93.8000.005	50
								93.8000.016	50
	PG16	26.5	17.0	27	13.0	45.0		93.8000.006	50
								93.8000.017	50
22.0	PG21	34.0	21.0	31	13.0	46.0		93.8000.007	50
								93.8000.018	50
21.0/23.0	PG21	37.0	23.5	34	13.0	47.0		93.8000.008	25
								93.8000.019	25
29.0	PG29	44.0	30.0	40	15.0	51.0		93.8000.009	25
								93.8000.020	25
36.0/37.0	PG36	52.0	36.5	50	15.0	54.0		93.8000.010	10
								93.8000.021	10
48.0/50.0	PG48	64.0	48.0	60	16.0	55.0		93.8000.011	50
								93.8000.022	5

Technische Änderungen vorbehalten – Sous réserve de changements techniques – Technical alterations reserved