


Cell Type N-600AAK


Specifications

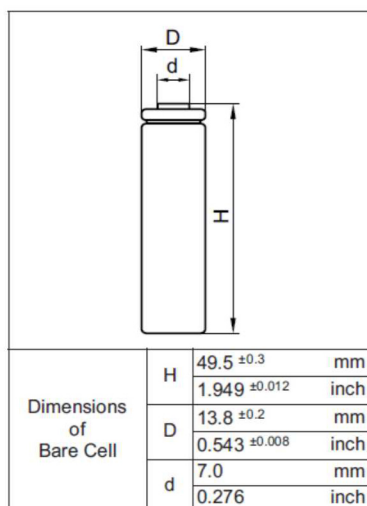


Nominal Capacity		600mAh		
Nominal Voltage		1.2V		
Charging Current	Standard	60mA		
	Quick	180mA		
Charging Time	Standard	14 to 16Hrs.		
	Quick	4 to 6Hrs.		
Ambient Temperature	Charge	Standard	0°C to +70°C [+32°F to 158°F]	
		Quick	10°C to +70°C [+50°F to 158°F]	
	Discharge		-20°C to +70°C [-4°F to 158°F]	
	Storage		-30°C to +70°C [-22°F to 158°F]	
Internal Impedance (Av.) (at 50% discharge)		12.0mΩ (at 1000Hz)		
Weight		22g/0.78oz		
Dimensions(D)×(H) (with tube)		14.3	⁰ _{-0.5} × 50.2	⁰ _{-1.0} mm
		0.56	⁰ _{-0.02} × 1.98	⁰ _{-0.04} inch

Typical Characteristics


Charge

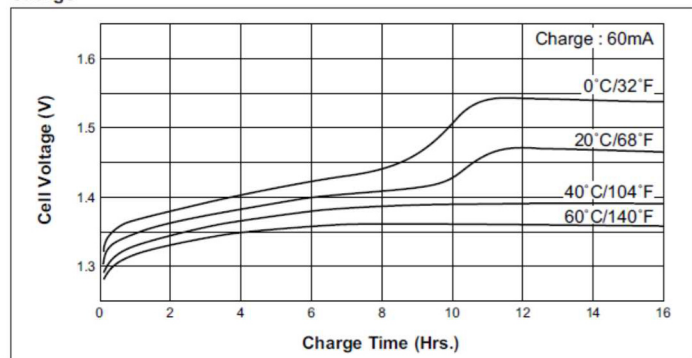


Discharge (at high rate)

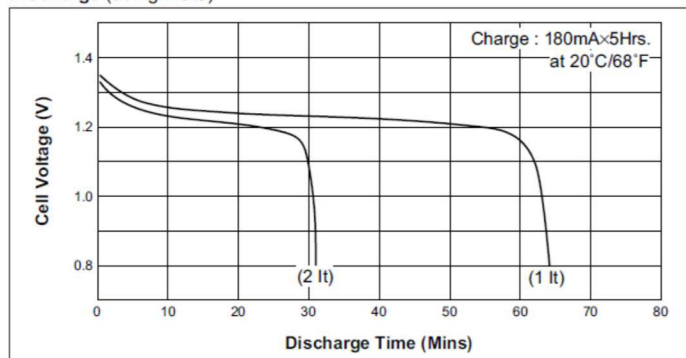


Charge

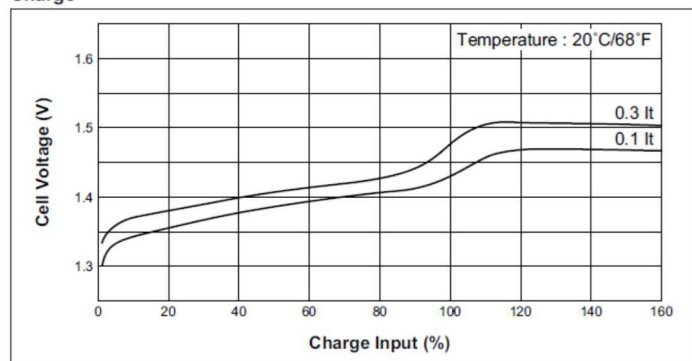

Discharge (at high rate)

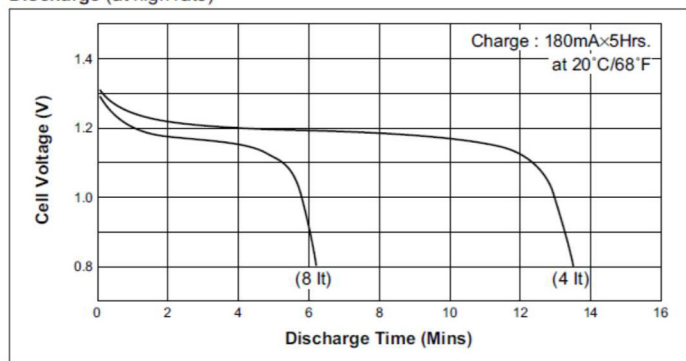

Discharge (at low rate)

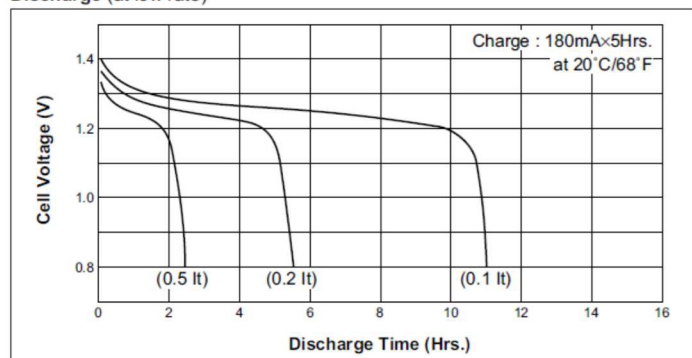

Temperature (Charge & Discharge)

